
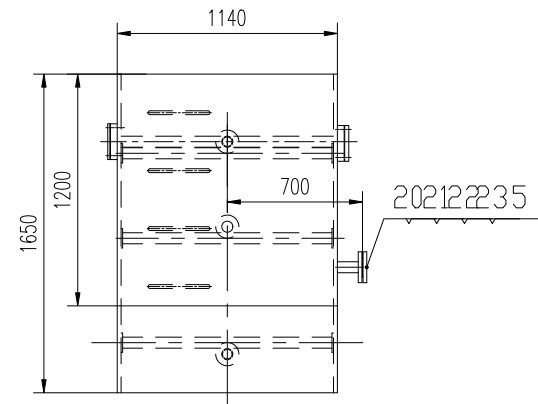
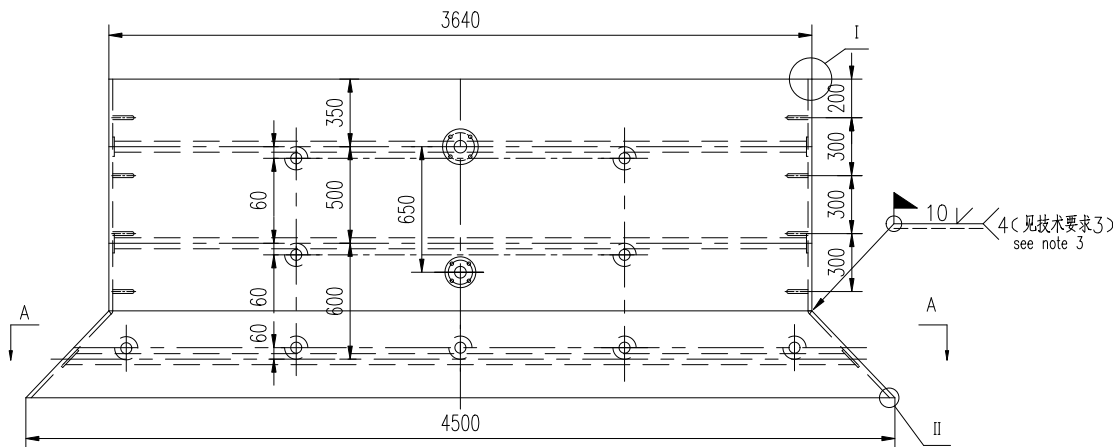
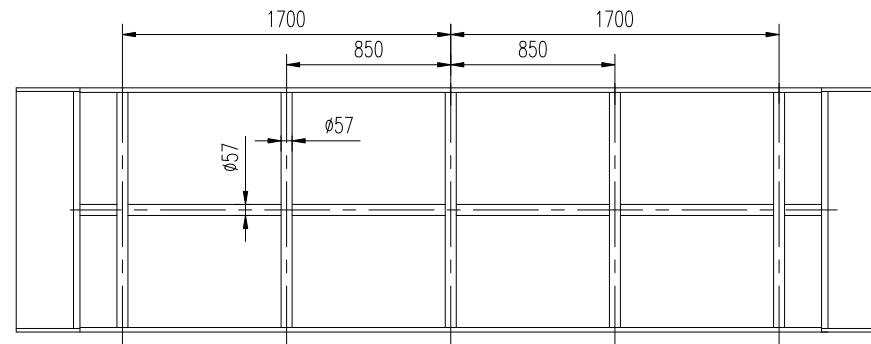


A-A

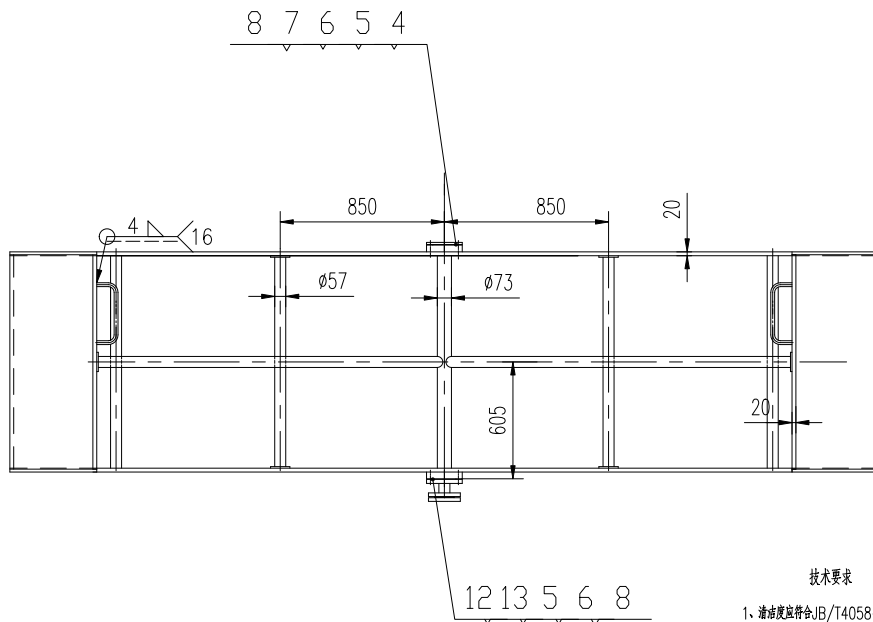

技术要求

- 1、清洁度应符合JB/T4058-1999《汽轮机清洁度》“洁-4”的规定。
 - 2、焊后外型轮廓的8条焊缝作煤油渗透试验。
 - 3、图示焊缝为厂内焊四点焊，现场切开后再进行最终组焊。
- NOTE:
- 1.The exhaust adapter complies with the Cleanliness-4 level stipulation of JB/T4058-1999 Standard of Cleanliness for Steam Turbines.
 - 2.After welding,a kerosene penetration test will be conducted for 8 welding seams.
 - 3.This welding seam is welding at points in workshop,the customer should cut it off and weld on-site.

设计

校对

日期

标记	处数	更改文件号	签字	日期	排气接管 Exhaust Pipeline	
设计	1	2025.11	2025.11	2025.11	0-0804-1136-173D-00	重量(Kg)
校对	1	2025.11	2025.11	2025.11	青岛捷能汽轮机集团股份有限公司	
审核	1	2025.11	2025.11	2025.11	QINGDAO JIENENG STEAM TURBINE GROUP CO., LTD.	