Chapter 5
Link Layer & LANS

Link Layer: Introduction

Some terminology:

- hosts and routers are **nodes**
- communication channels that connect adjacent nodes along communication path are **links**
  - wired links
  - wireless links
  - LANs
- layer-2 packet is a **frame**, encapsulates datagram

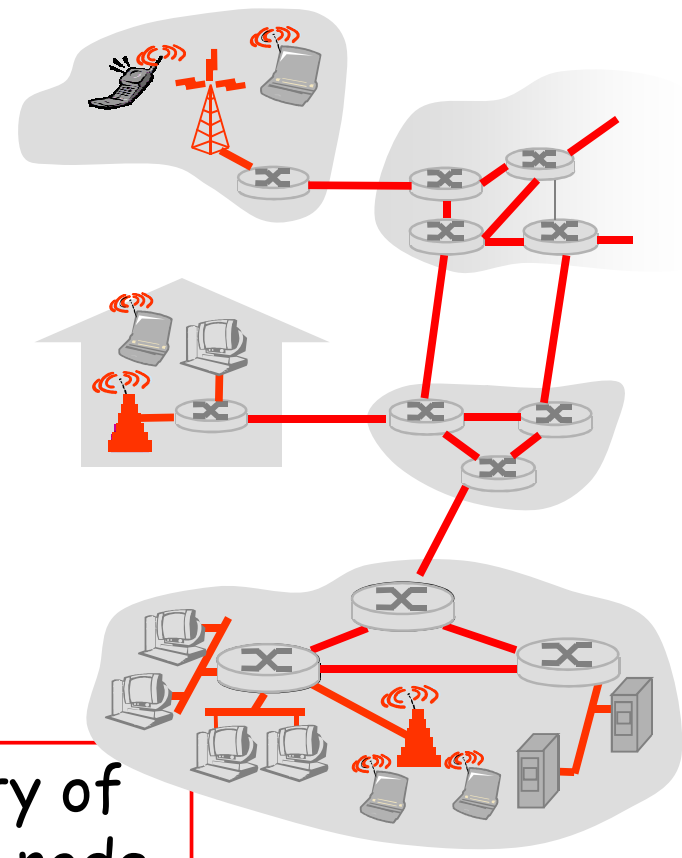

data-link layer has responsibility of transferring datagram from one node to adjacent node over a link

Link layer: context

- datagram transferred by different link protocols over different links:
  - e.g., Ethernet on first link, frame relay on intermediate links, 802.11 on last link
- each link protocol provides different services
  - e.g., may or may not provide rdt over link

Link Layer Services

- *framing, link access:*
  - encapsulate datagram into frame, adding header, trailer
  - channel access if shared medium
  - "MAC" addresses used in frame headers to identify source, dest
    - different from IP address!
- *reliable delivery between adjacent nodes*
  - we learned how to do this already (chapter 3)!
  - seldom used on low bit-error link (fiber, some twisted pair)
  - wireless links: high error rates
    - Q: why both link-level and end-end reliability?

Link Layer Services (more)

- *flow control:*
  - pacing between adjacent sending and receiving nodes
- *error detection:*
  - errors caused by signal attenuation, noise.
  - receiver detects presence of errors:
    - signals sender for retransmission or drops frame
- *error correction:*
  - receiver identifies *and corrects* bit error(s) without resorting to retransmission
- *half-duplex and full-duplex*
  - with half duplex, nodes at both ends of link can transmit, but not at same time

Where is the link layer implemented?

- in each and every host
- link layer implemented in "adaptor" (aka *network interface card* NIC)
  - Ethernet card, PCMCI card, 802.11 card
  - implements link, physical layer
- attaches into host's system buses
- combination of hardware, software, firmware

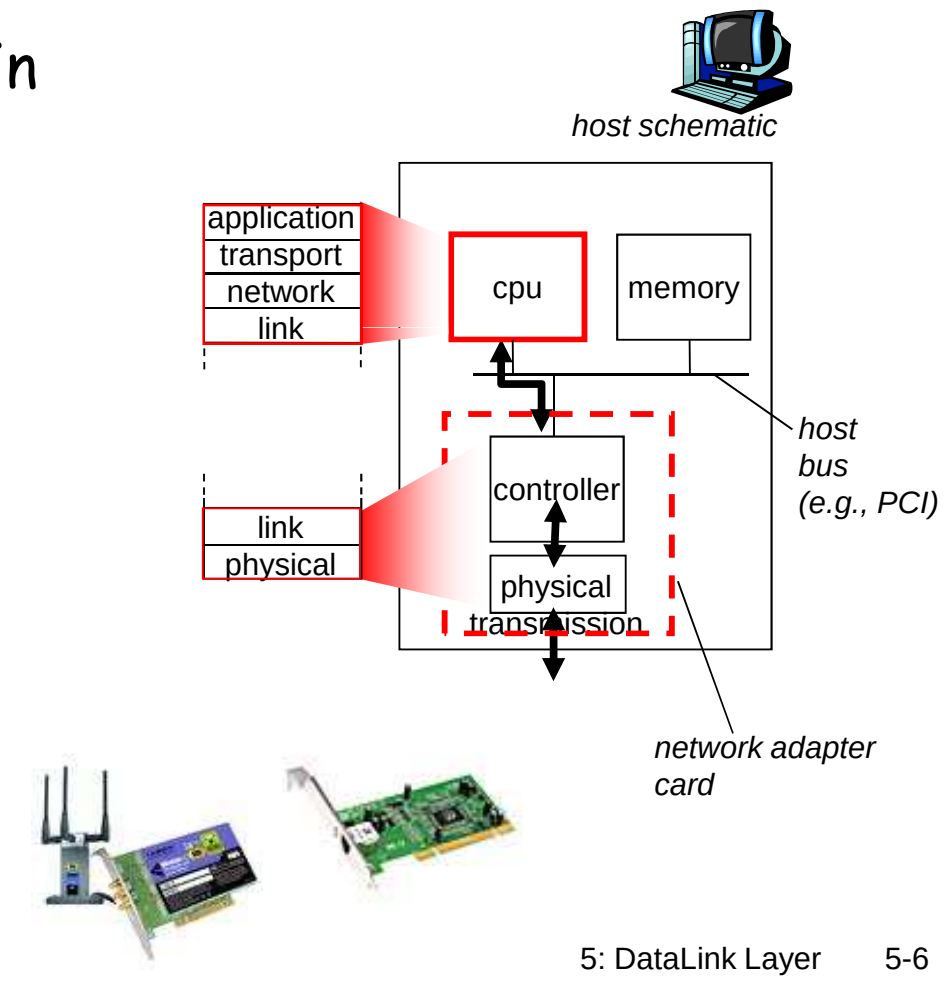

Adaptors Communicating

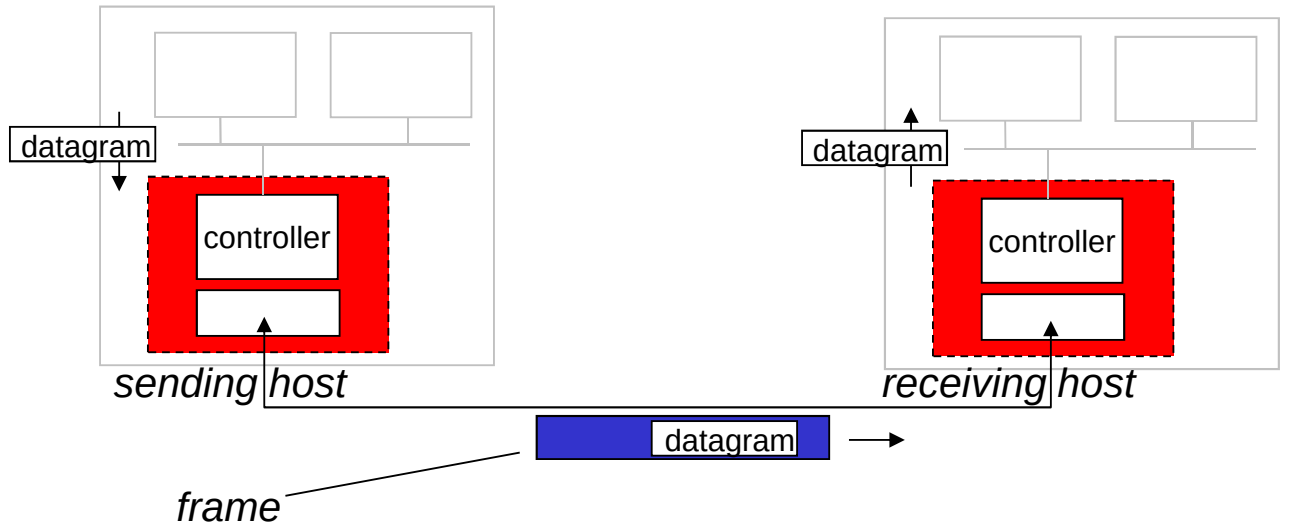

- sending side:
  - encapsulates datagram in frame
  - adds error checking bits, rdt, flow control, etc.
- receiving side
  - looks for errors, rdt, flow control, etc
  - extracts datagram, passes to upper layer at receiving side

Error Detection

EDC= Error Detection and Correction bits (redundancy)
D = Data protected by error checking, may include header fields

- Error detection not 100% reliable!
  - protocol may miss some errors, but rarely
  - larger EDC field yields better detection and correction

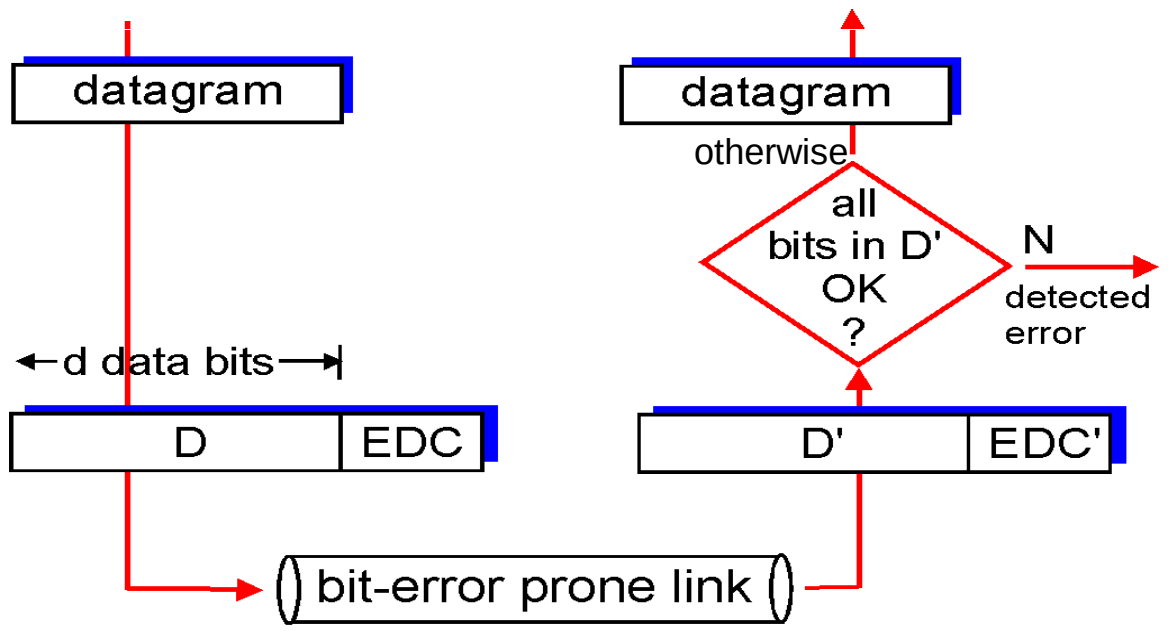

Parity Checking

Single Bit Parity:
Detect single bit errors



Two Dimensional Bit Parity:
Detect *and correct* single bit errors

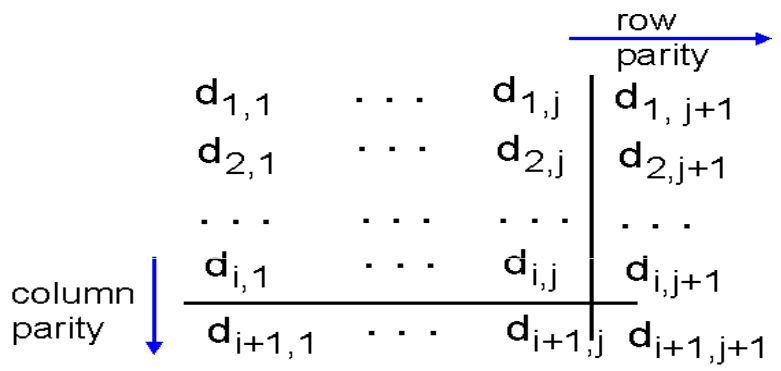

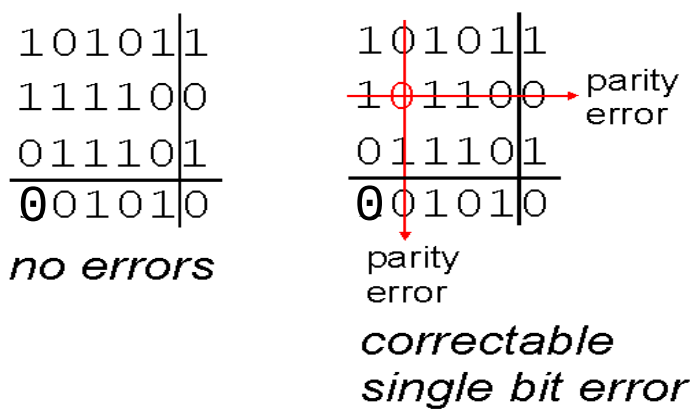

Multiple Access Links and Protocols

Two types of "links":
- point-to-point
  - PPP for dial-up access
  - point-to-point link between Ethernet switch and host
- broadcast (shared wire or medium)
  - old-fashioned Ethernet
  - upstream HFC
  - 802.11 wireless LAN



shared wire (e.g., cabled Ethernet)



shared RF (e.g., 802.11 WiFi)



shared RF (satellite)

humans at a cocktail party (shared air, acoustical)

Multiple Access protocols

- single shared broadcast channel
- two or more simultaneous transmissions by nodes: interference
  - collision if node receives two or more signals at the same time

multiple access protocol
- distributed algorithm that determines how nodes share channel, i.e., determine when node can transmit
- communication about channel sharing must use channel itself!
  - no out-of-band channel for coordination

Ideal Multiple Access Protocol

Broadcast channel of rate R bps

1. when one node wants to transmit, it can send at rate R.
2. when M nodes want to transmit, each can send at average rate R/M
3. fully decentralized:
   - no special node to coordinate transmissions
   - no synchronization of clocks, slots
4. simple

MAC Protocols: a taxonomy

Three broad classes:

- Channel Partitioning
  - divide channel into smaller "pieces" (time slots, frequency, code)
  - allocate piece to node for exclusive use
- Random Access
  - channel not divided, allow collisions
  - "recover" from collisions
- "Taking turns"
  - nodes take turns, but nodes with more to send can take longer turns

Channel Partitioning MAC protocols: TDMA

TDMA: time division multiple access

- access to channel in "rounds"
- each station gets fixed length slot (length = pkt trans time) in each round
- unused slots go idle
- example: 6-station LAN, 1,3,4 have pkt, slots 2,5,6 idle



Channel Partitioning MAC protocols: FDMA

FDMA: frequency division multiple access

- channel spectrum divided into frequency bands
- each station assigned fixed frequency band
- unused transmission time in frequency bands go idle
- example: 6-station LAN, 1,3,4 have pkt, frequency bands 2,5,6 idle

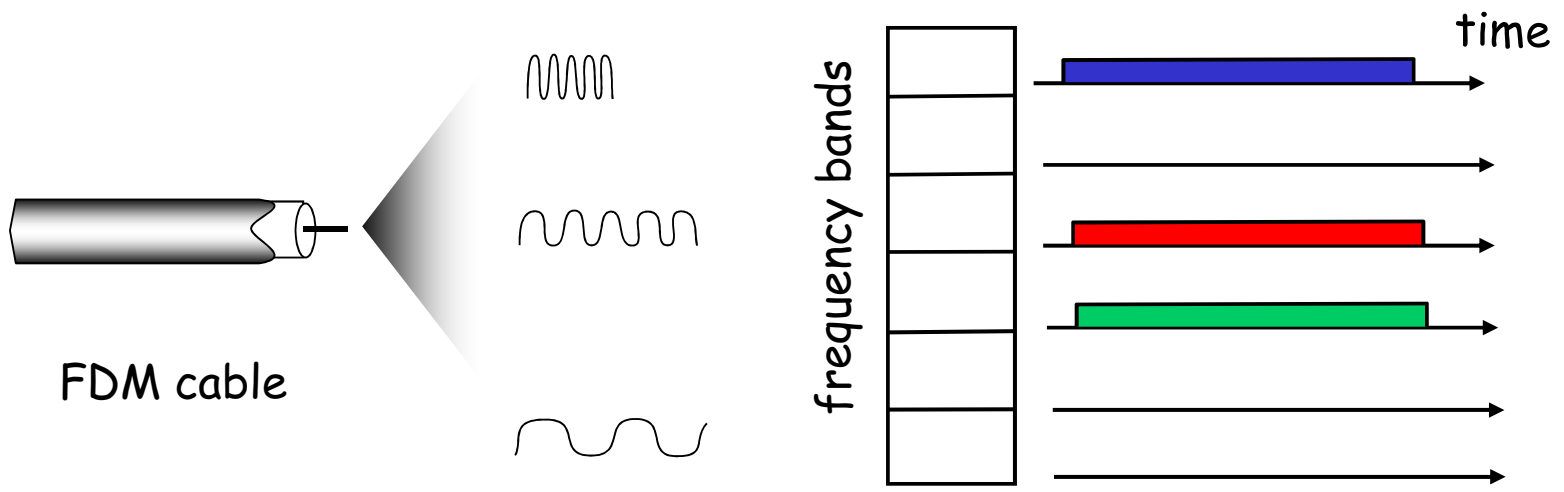

Random Access Protocols

- When node has packet to send
  - transmit at full channel data rate R.
  - no *a priori* coordination among nodes
- two or more transmitting nodes ➜ "collision",
- random access MAC protocol specifies:
  - how to detect collisions
  - how to recover from collisions (e.g., via delayed retransmissions)
- Examples of random access MAC protocols:
  - slotted ALOHA
  - ALOHA
  - CSMA, CSMA/CD, CSMA/CA

Slotted ALOHA

Assumptions:

- all frames same size
- time divided into equal size slots (time to transmit 1 frame)
- nodes start to transmit only slot beginning
- nodes are synchronized
- if 2 or more nodes transmit in slot, all nodes detect collision

Operation:

- when node obtains fresh frame, transmits in next slot
  - *if no collision:* node can send new frame in next slot
  - *if collision:* node retransmits frame in each subsequent slot with prob. p until success

Slotted ALOHA

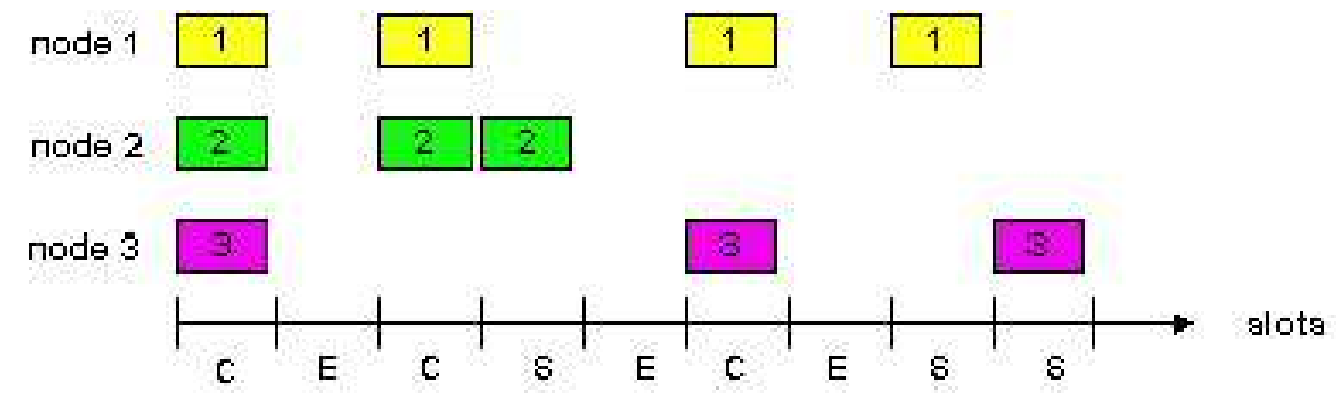

Pros

- single active node can continuously transmit at full rate of channel
- highly decentralized: only slots in nodes need to be in sync
- simple

Cons

- collisions, wasting slots
- idle slots
- nodes may be able to detect collision in less than time to transmit packet
- clock synchronization

Slotted Aloha efficiency

Efficiency : long-run fraction of successful slots (many nodes, all with many frames to send)

- *suppose:* N nodes with many frames to send, each transmits in slot with probability *p*
- prob that given node has success in a slot = $p(1-p)^{N-1}$
- prob that *any* node has a success = $Np(1-p)^{N-1}$

- max efficiency: find p* that maximizes $Np(1-p)^{N-1}$
- for many nodes, take limit of $Np^*(1-p^*)^{N-1}$ as N goes to infinity, gives:

Max efficiency = 1/e = .37

At best: channel used for useful transmissions 37% of time!

Pure (unslotted) ALOHA

- unslotted Aloha: simpler, no synchronization
- when frame first arrives
  - transmit immediately
- collision probability increases:
  - frame sent at t_0 collides with other frames sent in $[t_0-1, t_0+1]$

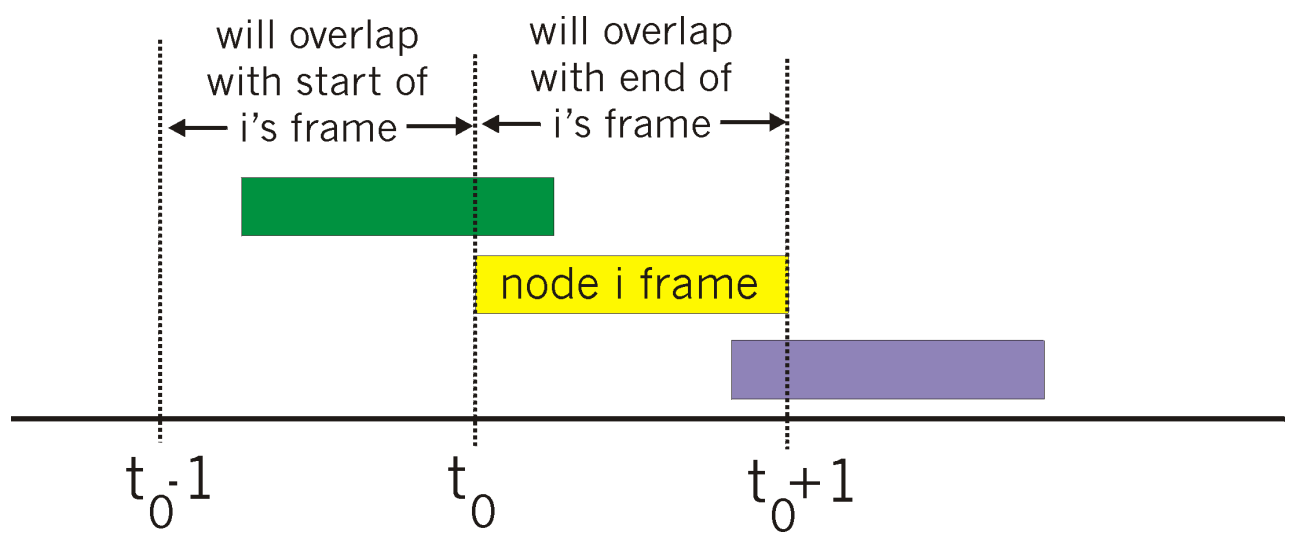

Pure Aloha efficiency

P(success by given node) = P(node transmits) ·

P(no other node transmits in $[t_0-1,t_0]$ ·

P(no other node transmits in $[t_0,t_0+1]$

$= p \cdot (1-p)^{N-1} \cdot (1-p)^{N-1}$

$= p \cdot (1-p)^{2(N-1)}$

… choosing optimum p and then letting n -> infty ...

= 1/(2e) = .18

even *worse* than slotted Aloha!

CSMA (Carrier Sense Multiple Access)

CSMA: listen before transmit:

If channel sensed idle: transmit entire frame

- If channel sensed busy, defer transmission

- human analogy: don't interrupt others!

CSMA collisions

collisions *can* still occur:

propagation delay means two nodes may not hear each other's transmission

collision:

entire packet transmission time wasted

note:

role of distance & propagation delay in determining collision probability

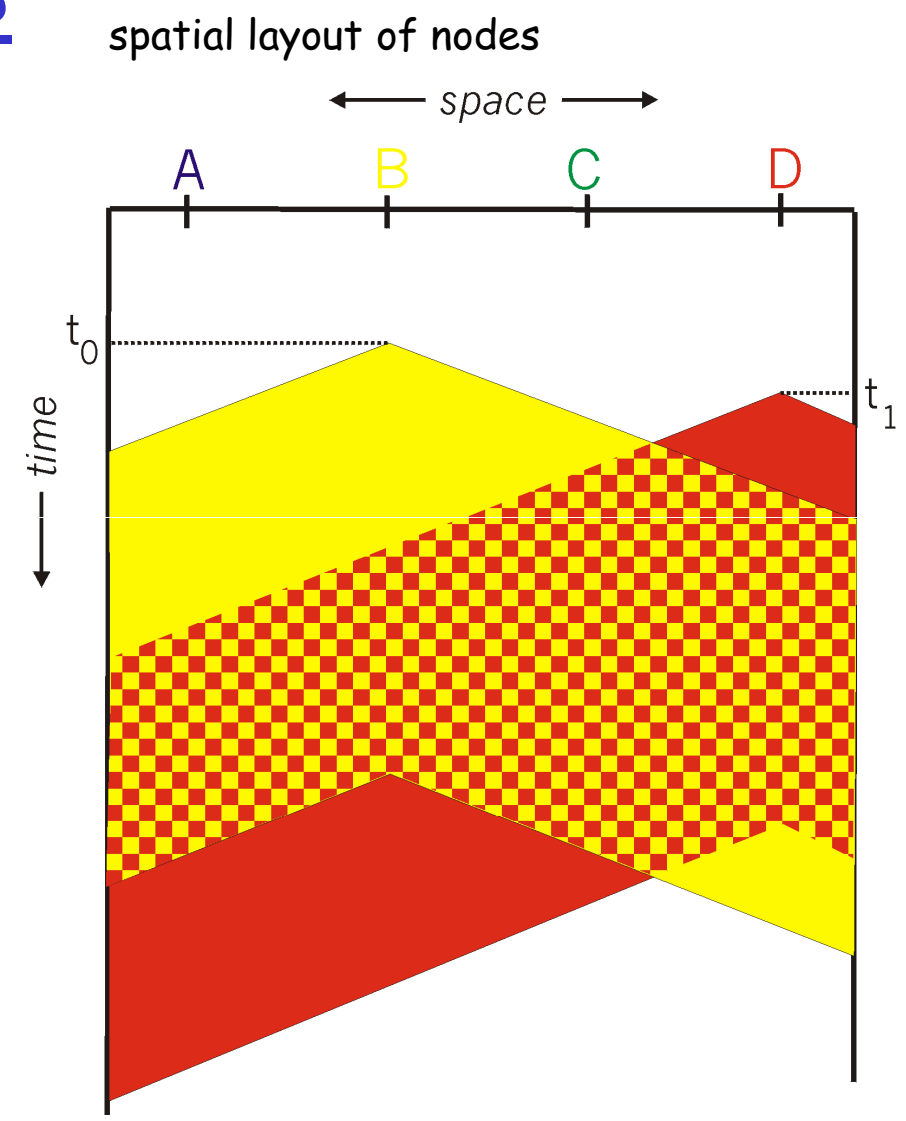

CSMA/CD (Collision Detection)

CSMA/CD: carrier sensing, deferral as in CSMA

- collisions *detected* within short time
- colliding transmissions aborted, reducing channel wastage

collision detection:

- easy in wired LANs: measure signal strengths, compare transmitted, received signals
- difficult in wireless LANs: received signal strength overwhelmed by local transmission strength

human analogy: the polite conversationalist

CSMA/CD collision detection

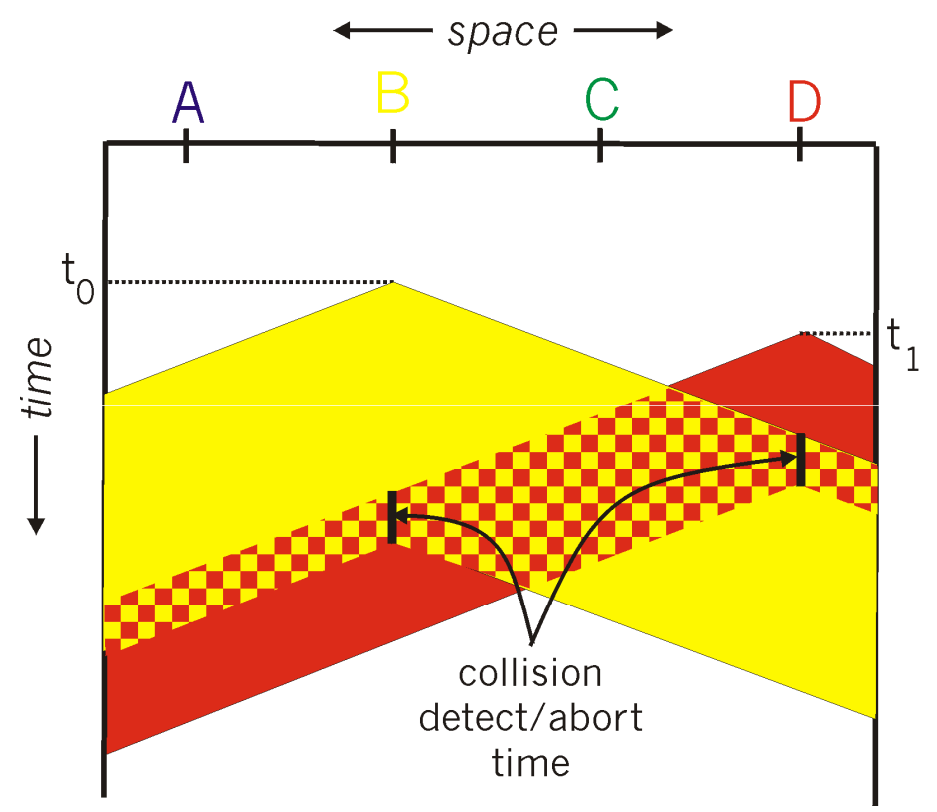

"Taking Turns" MAC protocols

channel partitioning MAC protocols:
- share channel *efficiently* and *fairly* at high load
- inefficient at low load: delay in channel access, 1/N bandwidth allocated even if only 1 active node!

Random access MAC protocols
- efficient at low load: single node can fully utilize channel
- high load: collision overhead

"taking turns" protocols
- look for best of both worlds!

"Taking Turns" MAC protocols

Polling:
- master node "invites" slave nodes to transmit in turn
- typically used with "dumb" slave devices
- concerns:
  - polling overhead
  - latency
  - single point of failure (master)



"Taking Turns" MAC protocols

Token passing:
- control **token** passed from one node to next sequentially.
- token message
- concerns:
  - token overhead
  - latency
  - single point of failure (token)

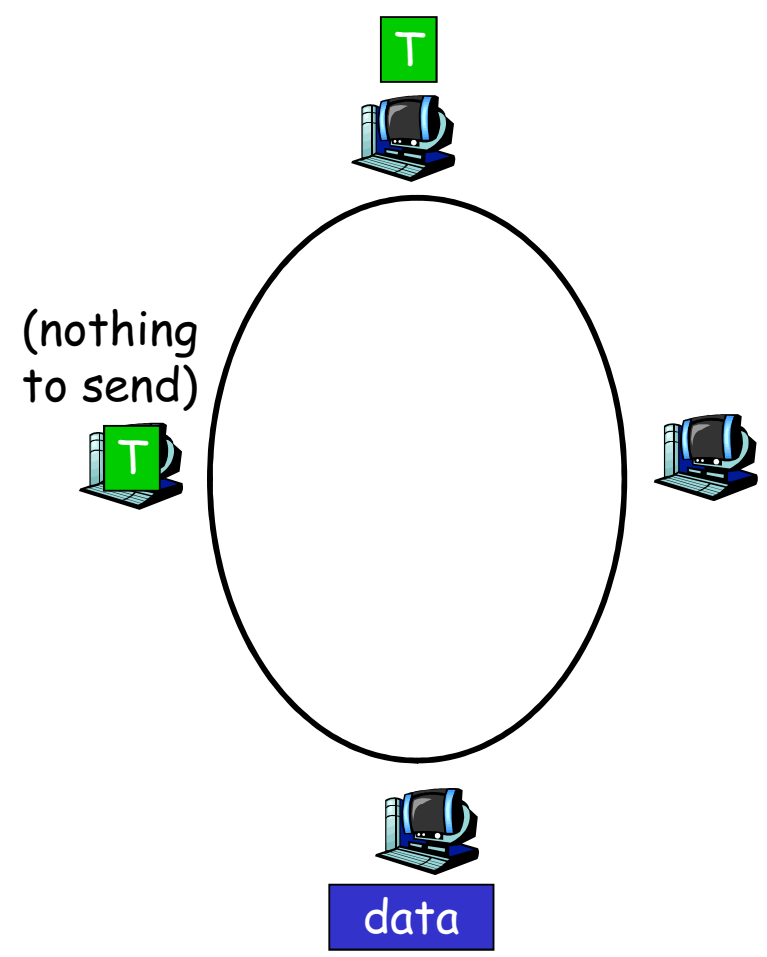

Summary of MAC protocols

- *channel partitioning,* by time, frequency or code
  - Time Division, Frequency Division
- *random access* (dynamic),
  - ALOHA, S-ALOHA, CSMA, CSMA/CD
  - carrier sensing: easy in some technologies (wire), hard in others (wireless)
  - CSMA/CD used in Ethernet
  - CSMA/CA used in 802.11
- *taking turns*
  - polling from central site, token passing
  - Bluetooth, FDDI, IBM Token Ring

MAC Addresses and ARP

- 32-bit IP address:
  - *network-layer* address
  - used to get datagram to destination IP subnet
- MAC (or LAN or physical or Ethernet) address:
  - function: *get frame from one interface to another physically-connected interface (same network)*
  - 48 bit MAC address (for most LANs)
    - burned in NIC ROM, also sometimes software settable

LAN Addresses and ARP

Each adapter on LAN has unique LAN address

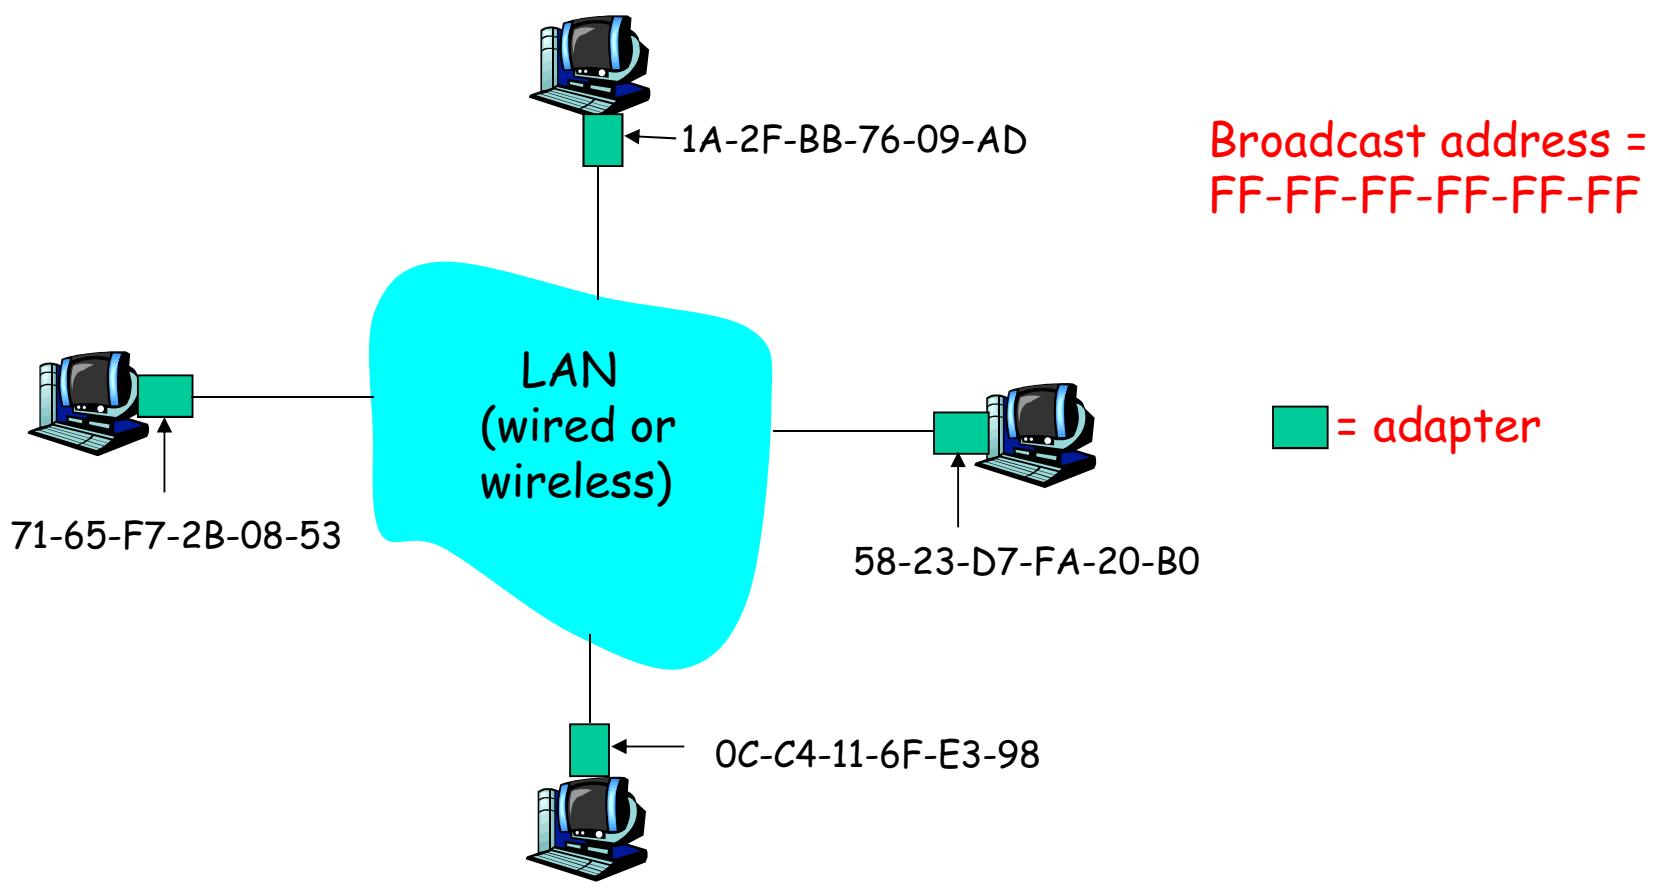

LAN Address (more)

- MAC address allocation administered by IEEE
- manufacturer buys portion of MAC address space (to assure uniqueness)
- analogy:
  - (a) MAC address: like Social Security Number
  - (b) IP address: like postal address
- MAC flat address ➜ portability
  - can move LAN card from one LAN to another
- IP hierarchical address NOT portable
  - address depends on IP subnet to which node is attached

ARP: Address Resolution Protocol

Question: how to determine MAC address of B knowing B's IP address?

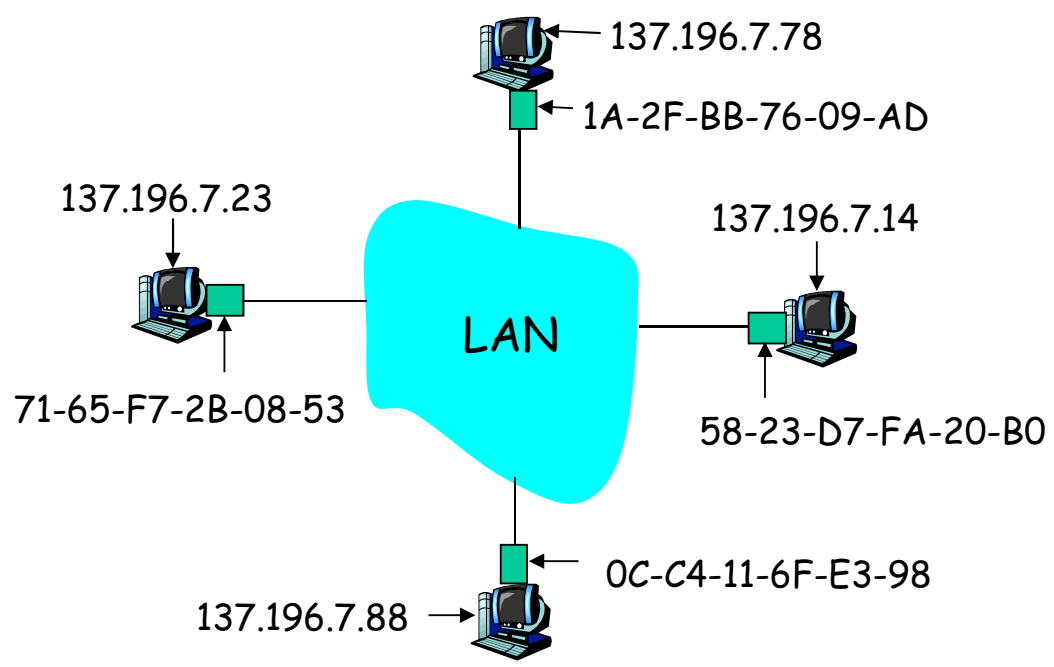

- Each IP node (host, router) on LAN has ARP table
- ARP table: IP/MAC address mappings for some LAN nodes
  - < IP address; MAC address; TTL>
  - TTL (Time To Live): time after which address mapping will be forgotten (typically 20 min)

ARP protocol: Same LAN (network)

- A wants to send datagram to B, and B's MAC address not in A's ARP table.
- A broadcasts ARP query packet, containing B's IP address
  - dest MAC address = FF-FF-FF-FF-FF-FF
  - all machines on LAN receive ARP query
- B receives ARP packet, replies to A with its (B's) MAC address
  - frame sent to A's MAC address (unicast)
- A caches (saves) IP-to-MAC address pair in its ARP table until information becomes old (times out)
  - soft state: information that times out (goes away) unless refreshed
- ARP is "plug-and-play":
  - nodes create their ARP tables *without intervention from net administrator*

ARP Protocol: ARP message

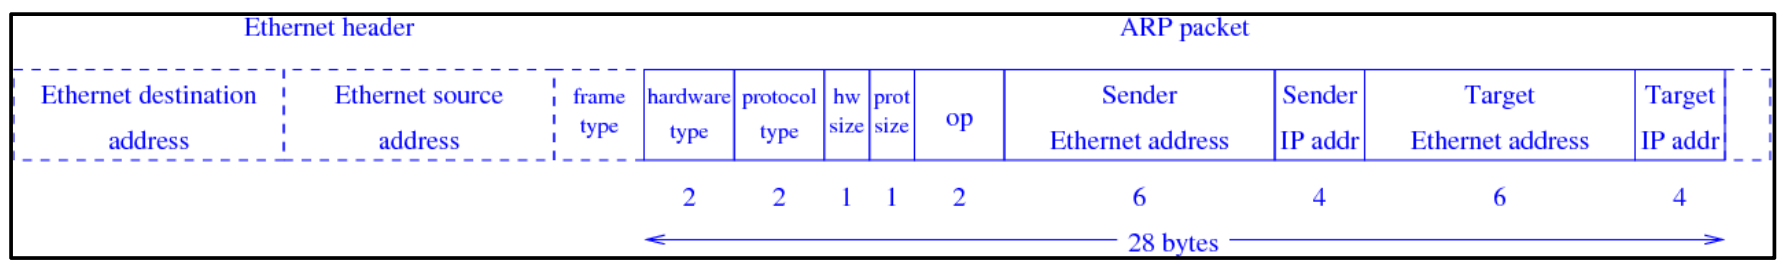

ARP Protocol Header, Request

ARP Request, Ethernet, IPV4

Hardware Type = 1		Protocol Type = 0x800
Hardware Length = 6	Protocol Length = 4	Operation Request = 1
Requester MAC Address...		
...Requester MAC Address		Requester IP Address...
...Requester IP Address		Responder MAC Address All Zeros on Request...
...Responder MAC Address All Zeros on Request		
Responder IP Address		

ARP Protocol Header, Reply

ARP Reply, Ethernet, IPV4

Hardware Type = 1		Protocol Type = 0x800	
Hardware Length = 6	Protocol Length = 4	Operation Reply = 2	
Responder MAC Address...			
...Responder MAC Address		Responder IP Address...	
...Responder IP Address		Resquester MAC Address...	
...Resquester MAC Address			
Requester IP Address			

ARP Protocol Header, Request With Ethernet 802.3 Header

ARP Request with 802.3, Ethernet, IPV4

Destination MAC Address Broadcast (all ones)...			
...Destination MAC Address Broadcast (all ones)		Source MAC Address...	
...Source MAC Address			
Protocol Number = 0x806		Hardware Type = 1	
Protocol Type = 0x800		Hardware Length = 6	Protocol Length = 4
Operation Request = 1		Requester MAC Address...	
...Requester MAC Address			
Requester IP Address			
Responder MAC Address All Zeros on Request...			
...Responder MAC Address All Zeros on Request		Responder IP Address...	

What protocol "layer" is ARP?

- Uses the services of the MAC layer (layer 2)
  - So technically a "layer 3" protocol
  - Ethernet "type" field is 0x806
- But, ARP messages are NOT forwarded by routers, and are "valid" only on a single physical network
  - By this, it is a MAC (or data-link) layer protocol

Addressing: routing to another LAN

walkthrough: send datagram from A to B via R

focus on addressing – at IP (datagram) and MAC layer (frame)

assume A knows B's IP address

assume A knows IP address of first hop router, R (how?)

assume A knows R's MAC address (how?)

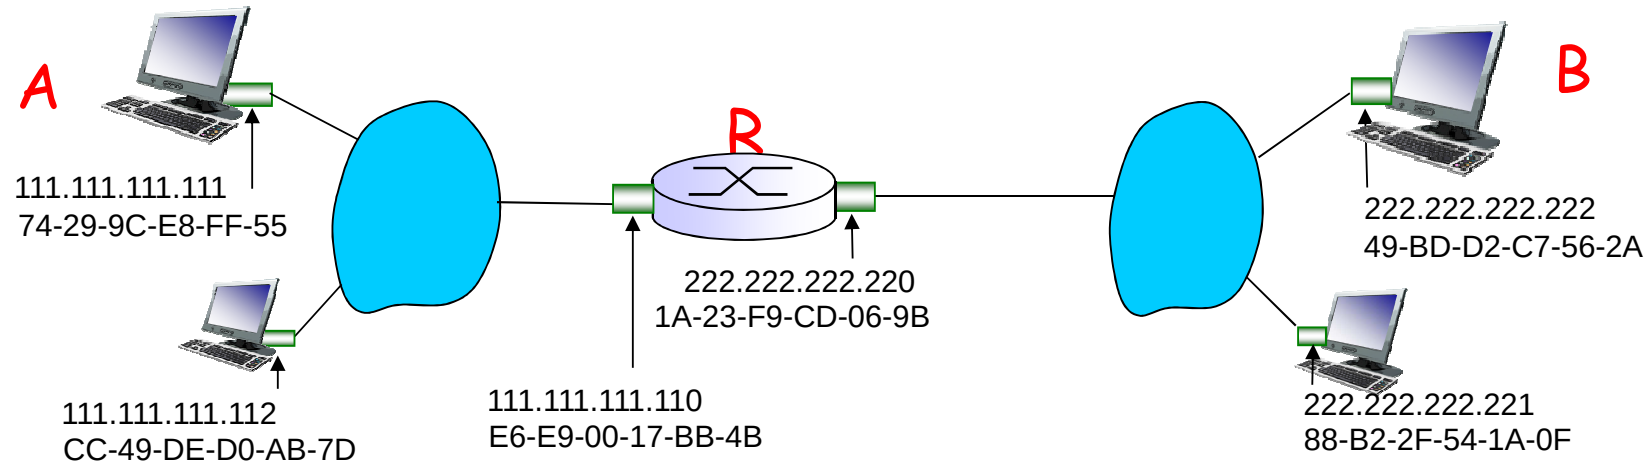

Addressing: routing to another LAN

- A creates IP datagram with IP source A, destination B
- A creates link-layer frame with R's MAC address as dest, frame contains A-to-B IP datagram

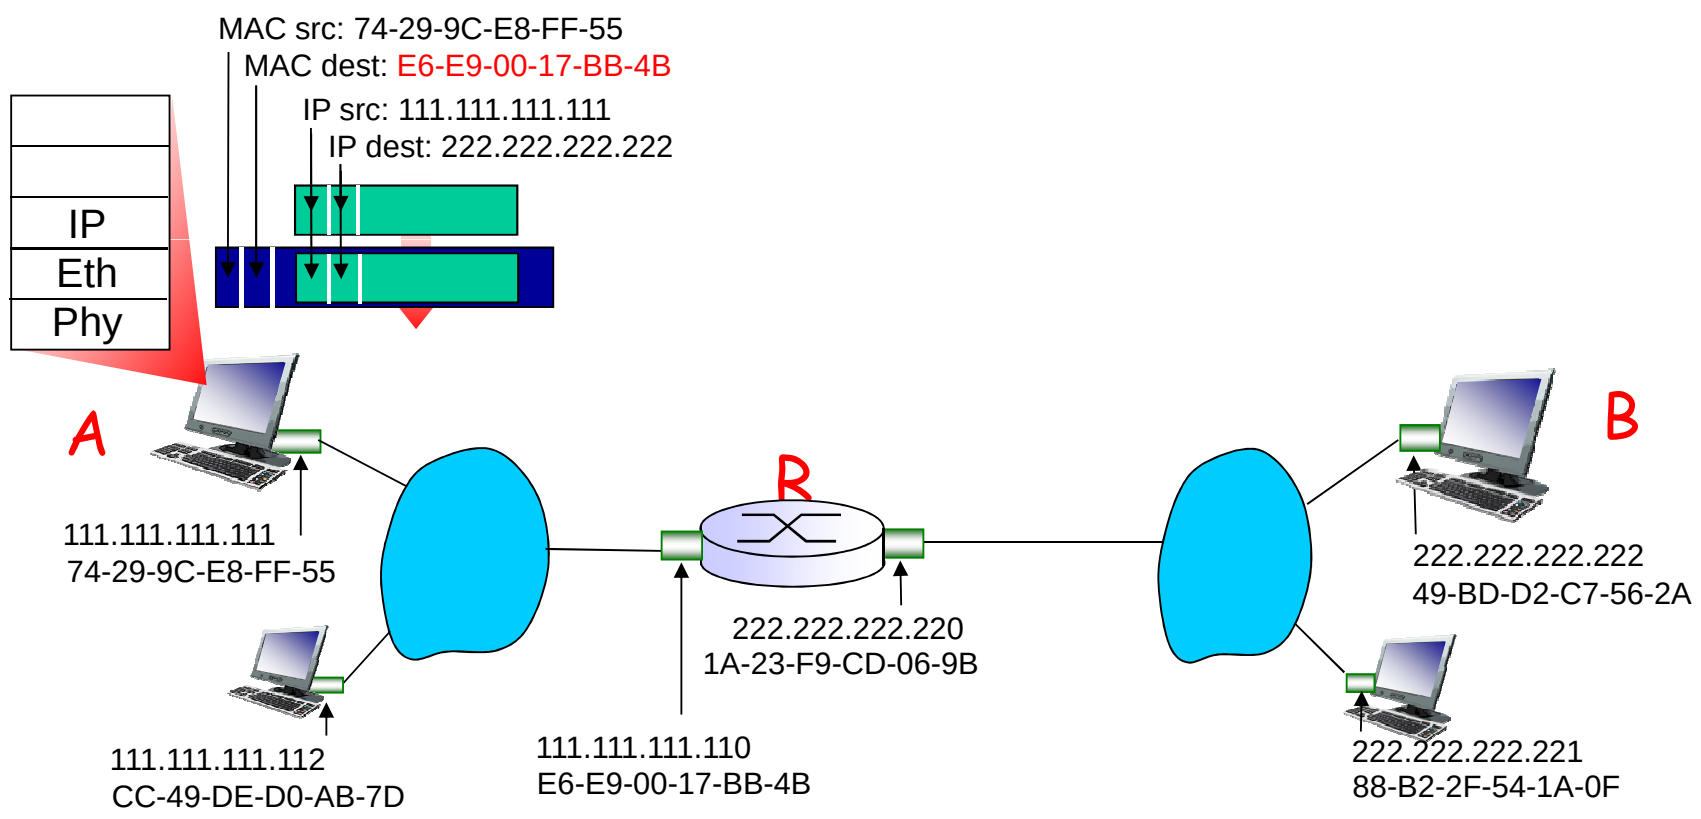

Addressing: routing to another LAN

- frame sent from A to R
- frame received at R, datagram removed, passed up to IP

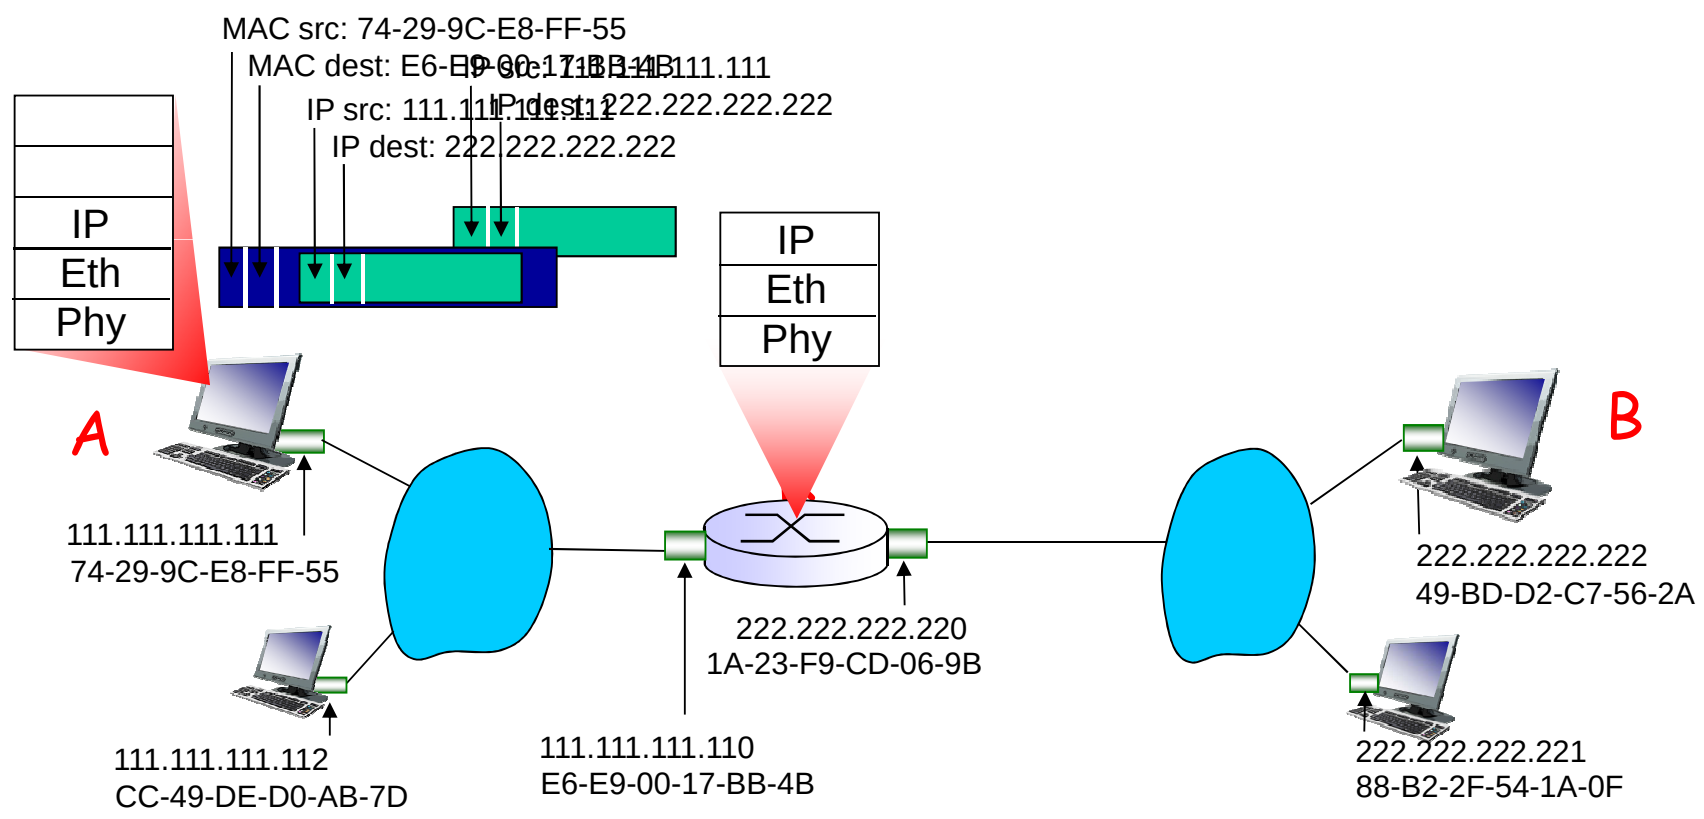

Addressing: routing to another LAN

- R forwards datagram with IP source A, destination B
- R creates link-layer frame with B's MAC address as dest, frame contains A-to-B IP datagram

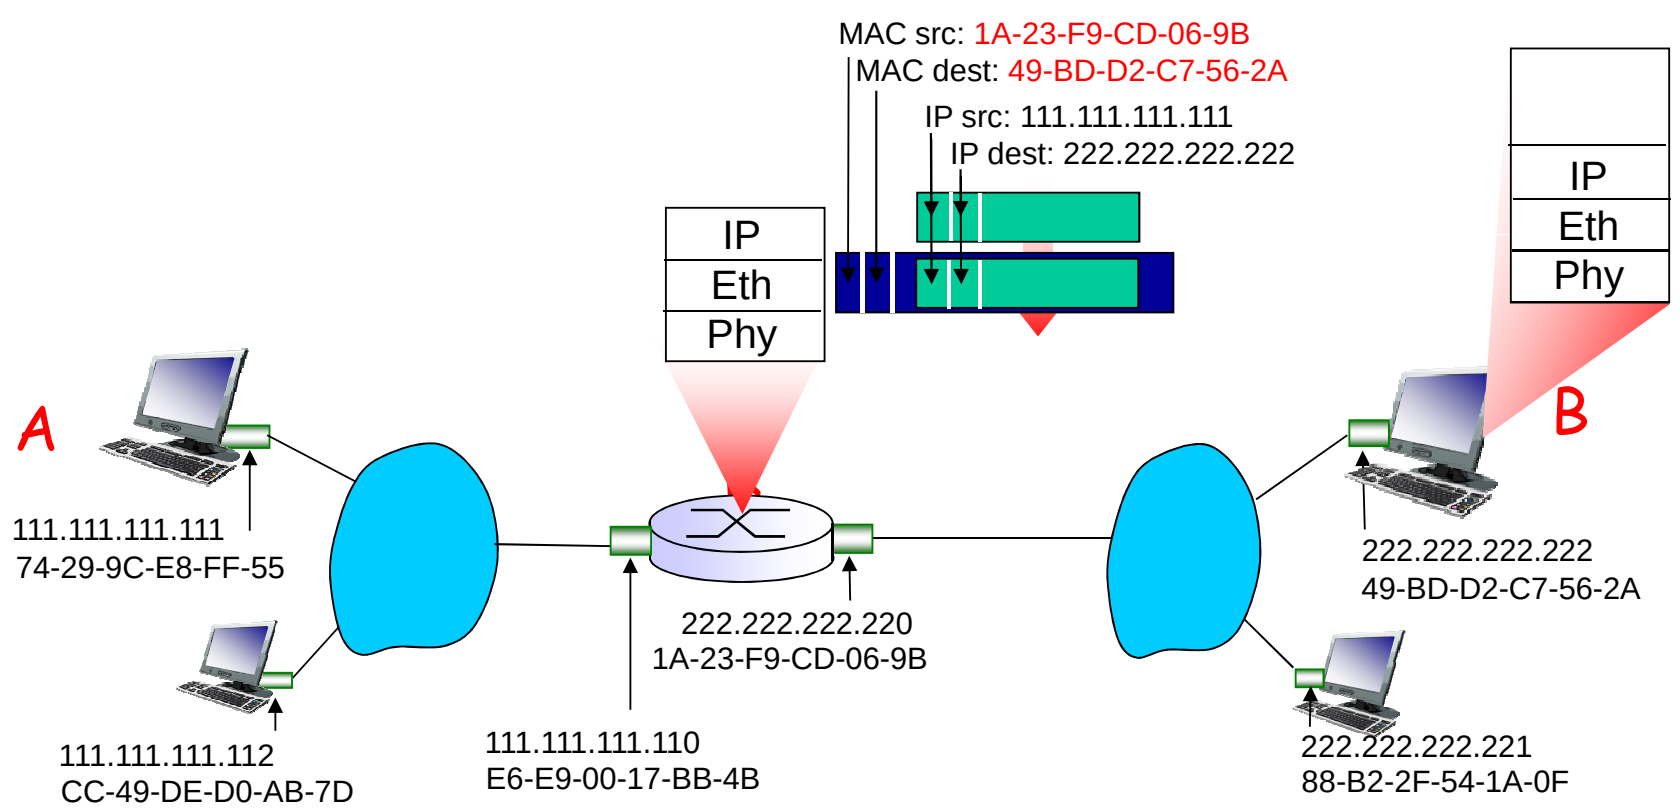

Addressing: routing to another LAN

- R forwards datagram with IP source A, destination B
- R creates link-layer frame with B's MAC address as dest, frame contains A-to-B IP datagram

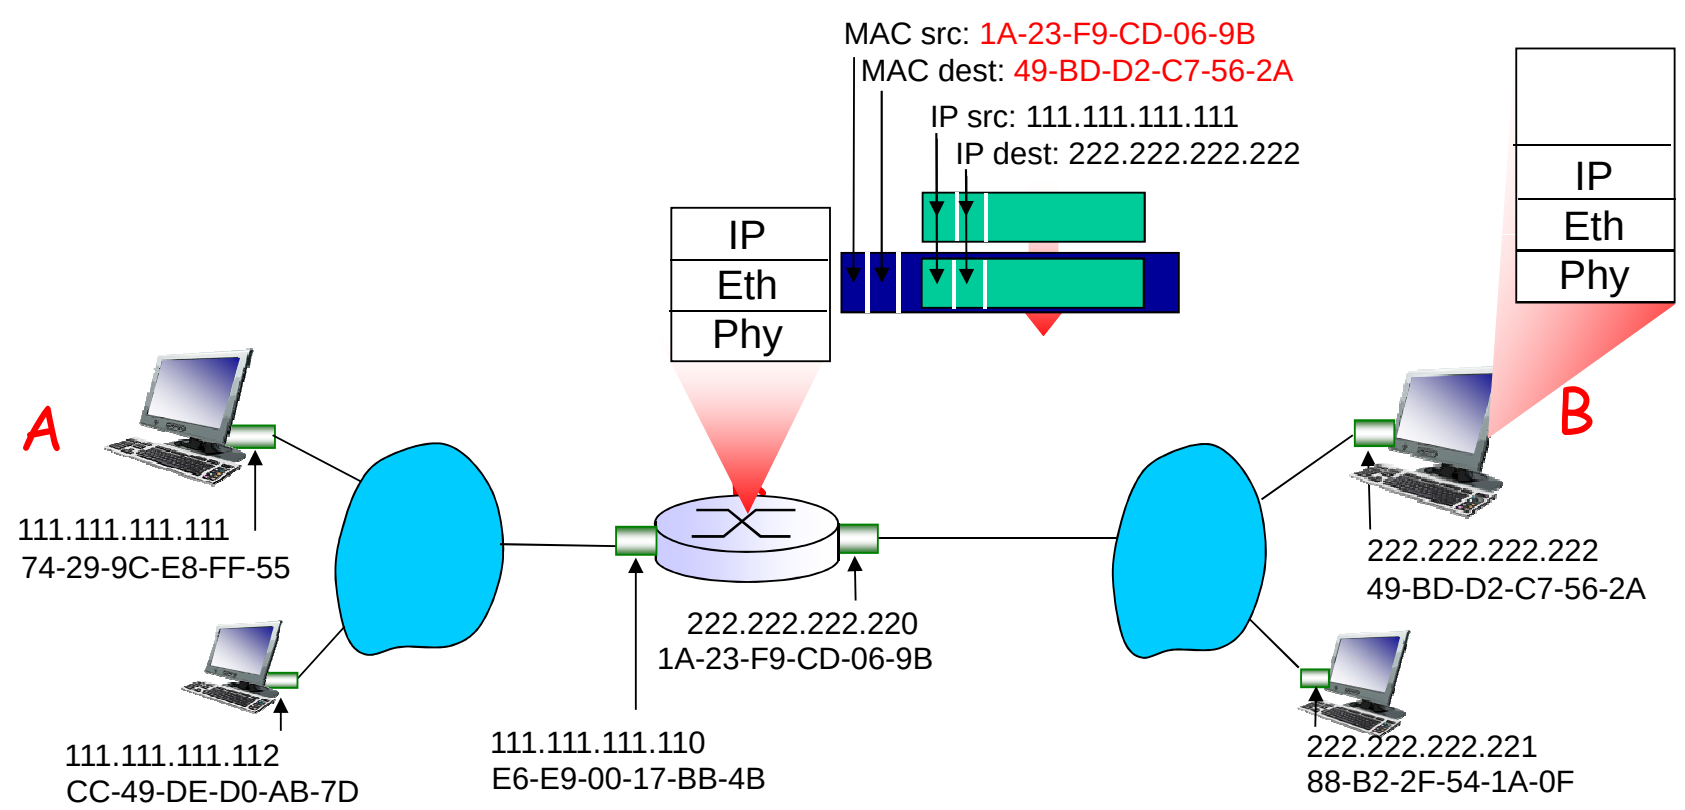

Addressing: routing to another LAN

- R forwards datagram with IP source A, destination B
- R creates link-layer frame with B's MAC address as dest, frame contains A-to-B IP datagram

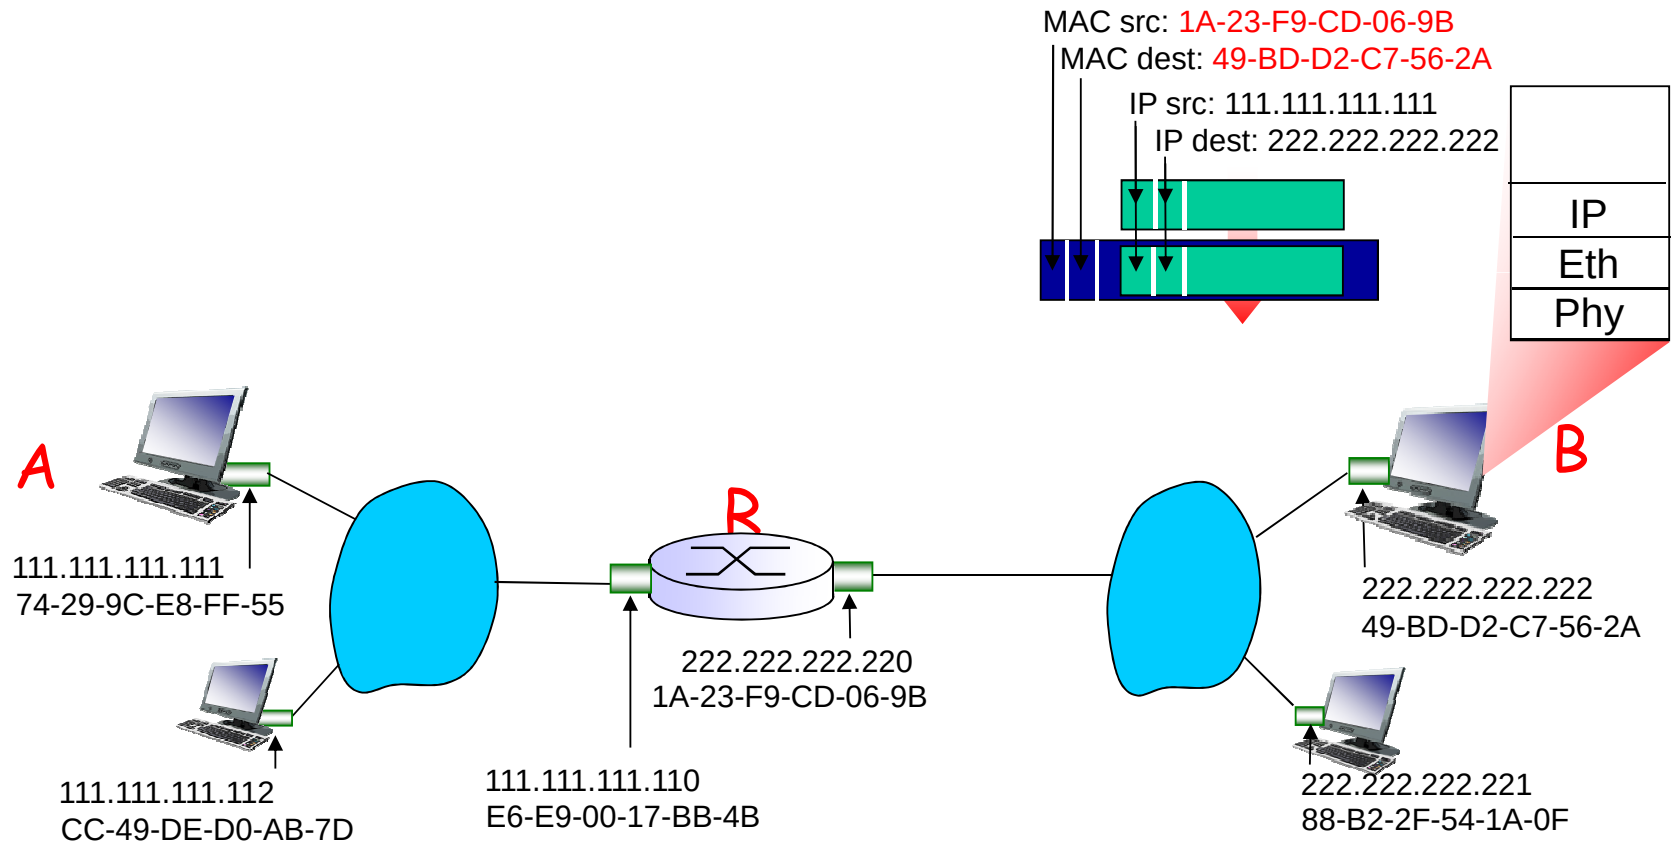

Ethernet

"dominant" wired LAN technology:
- cheap $20 for NIC
- first widely used LAN technology
- simpler, cheaper than token LANs and ATM
- kept up with speed race: 10 Mbps – 10 Gbps

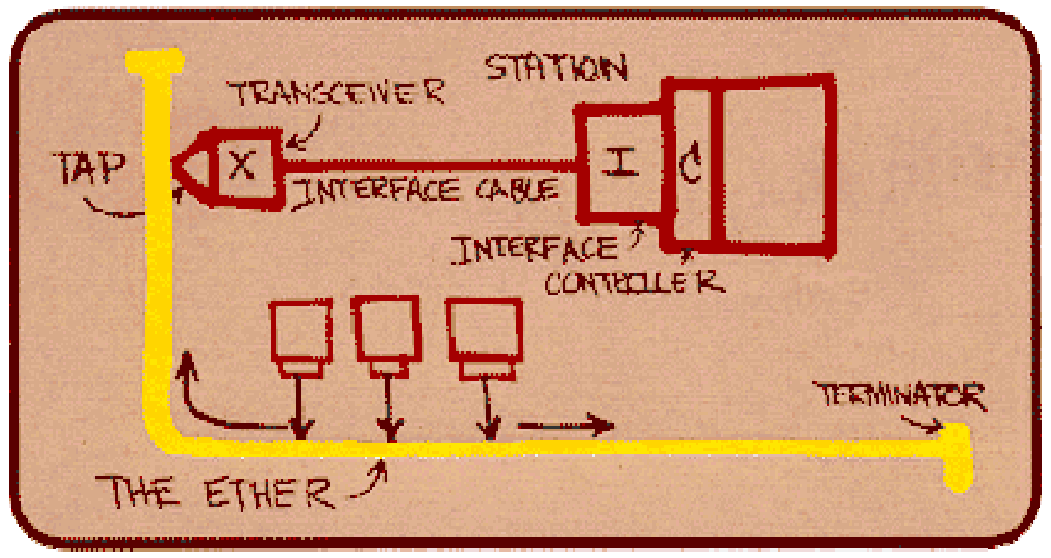

Metcalfe's Ethernet sketch

Star topology

- bus topology popular through mid 90s
  - all nodes in same collision domain (can collide with each other)
- today: star topology prevails
  - active *switch* in center
  - each "spoke" runs a (separate) Ethernet protocol (nodes do not collide with each other)



bus: coaxial cable

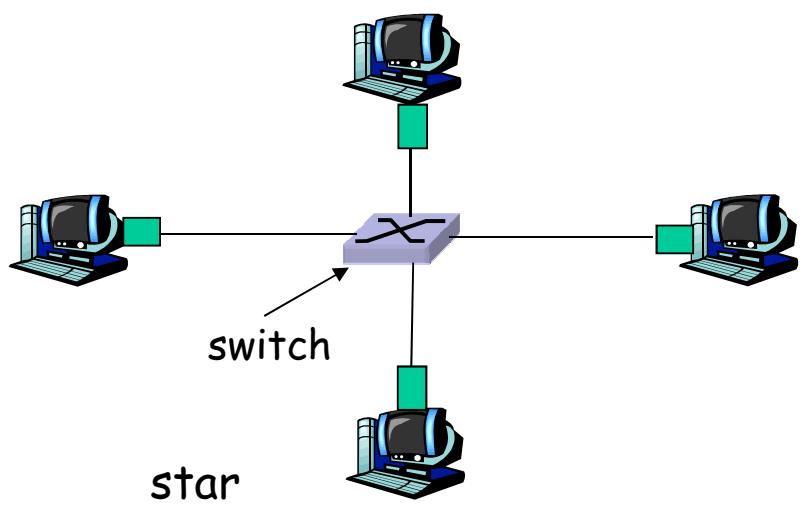

star

Ethernet Frame Structure

Sending adapter encapsulates IP datagram (or other network layer protocol packet) in Ethernet frame



Preamble:
- 7 bytes with pattern 10101010 followed by one byte with pattern 10101011
- used to synchronize receiver, sender clock rates

Ethernet Frame Structure (more)

- Addresses: 6 bytes
  - if adapter receives frame with matching destination address, or with broadcast address (eg ARP packet), it passes data in frame to network layer protocol
  - otherwise, adapter discards frame
- Type: indicates higher layer protocol (mostly IP but others possible, e.g., Novell IPX, AppleTalk)
- CRC: checked at receiver, if error is detected, frame is dropped



Ethernet: Unreliable, connectionless

- connectionless: No handshaking between sending and receiving NICs
- unreliable: receiving NIC doesn't send acks or nacks to sending NIC
  - stream of datagrams passed to network layer can have gaps (missing datagrams)
  - gaps will be filled if app is using TCP
  - otherwise, app will see gaps
- Ethernet's MAC protocol: unslotted CSMA/CD

Ethernet CSMA/CD algorithm

1. NIC receives datagram from network layer, creates frame
2. If NIC senses channel idle, starts frame transmission If NIC senses channel busy, waits until channel idle, then transmits
3. If NIC transmits entire frame without detecting another transmission, NIC is done with frame !
4. If NIC detects another transmission while transmitting, aborts and sends jam signal
5. After aborting, NIC enters **exponential backoff**: after *m*th collision, NIC chooses *K* at random from $\{0,1,2,\ldots,2^m-1\}$. NIC waits K·512 bit times, returns to Step 2

Ethernet's CSMA/CD (more)

Jam Signal: make sure all other transmitters are aware of collision; 48 bits

Bit time: .1 microsec for 10 Mbps Ethernet ; for K=1023, wait time is about 50 msec

Exponential Backoff:

- *Goal*: adapt retransmission attempts to estimated current load
  - heavy load: random wait will be longer
- first collision: choose K from {0,1}; delay is K· 512 bit transmission times
- after second collision: choose K from {0,1,2,3}…
- after ten collisions, choose K from {0,1,2,3,4,…,1023}

CSMA/CD efficiency

T_{prop} = max prop delay between 2 nodes in LAN
t_{trans} = time to transmit max-size frame

$$efficiency = \frac{1}{1 + 5t_{prop}/t_{trans}}$$

efficiency goes to 1
- as t_{prop} goes to 0
- as t_{trans} goes to infinity

better performance than ALOHA: and simple, cheap, decentralized!

802.3 Ethernet Standards: Link & Physical Layers

many different Ethernet standards
- common MAC protocol and frame format
- different speeds: 2 Mbps, 10 Mbps, 100 Mbps, 1Gbps, 10G bps
- different physical layer media: fiber, cable

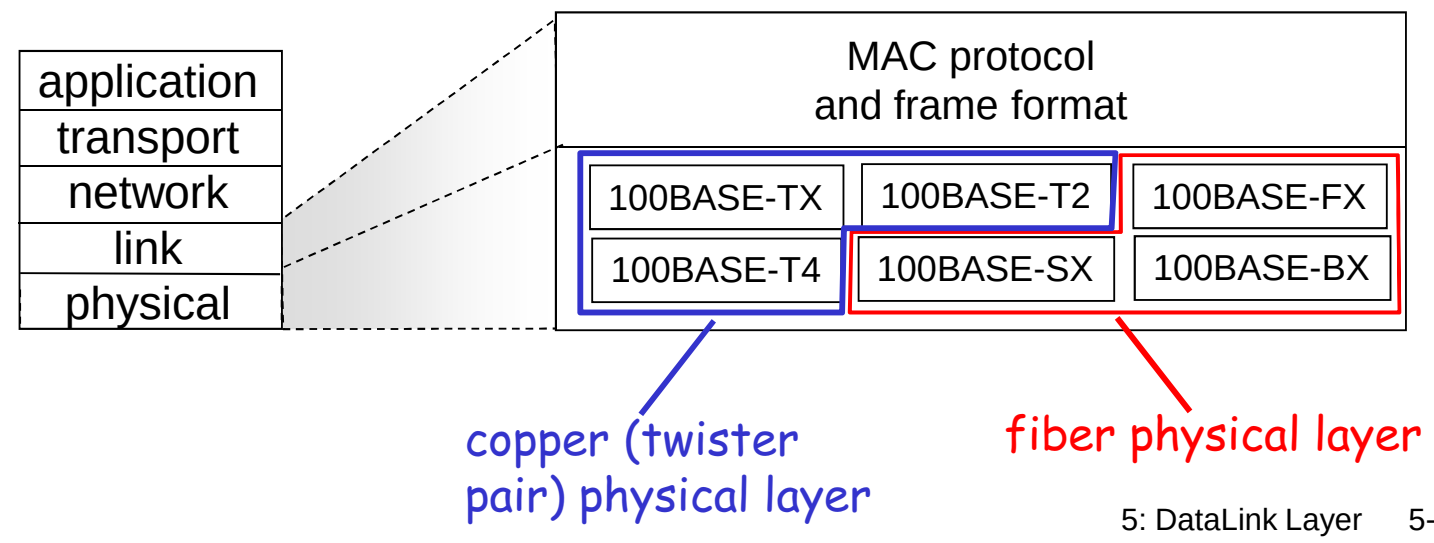

Manchester encoding

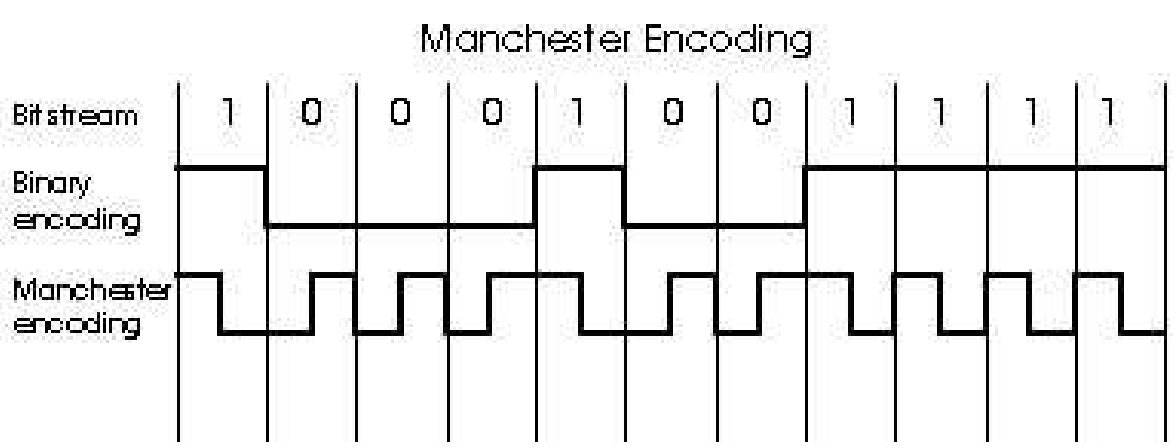

- used in 10BaseT
- each bit has a transition
- allows clocks in sending and receiving nodes to synchronize to each other
  - no need for a centralized, global clock among nodes!
- Hey, this is physical-layer stuff!

Ethernet Technologies: 10Base2

- 10: 10Mbps; 2: under 200 meters max cable length
- thin coaxial cable in a bus topology

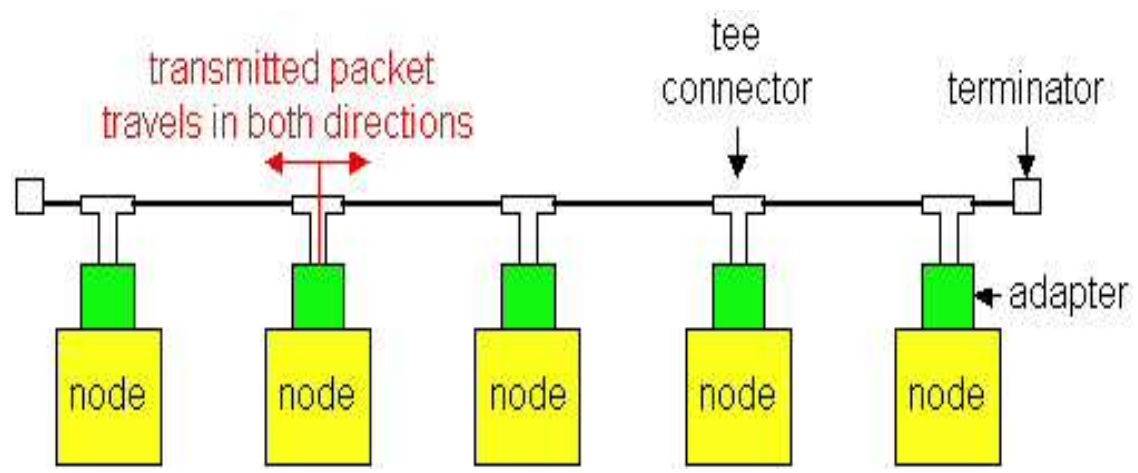

- repeaters used to connect up to multiple segments
- repeater repeats bits it hears on one interface to its other interfaces: physical layer device only!
- has become a legacy technology

10BaseT and 100BaseT - Hubs

- 10/100 Mbps rate; latter called "fast ethernet"
- T stands for Twisted Pair
- Nodes connect to a hub: "star topology"; 100 m max distance between nodes and hub
- Hubs are essentially physical-layer repeaters:
  - bits coming in one link go out all other links
  - no frame buffering
  - no CSMA/CD at hub: adapters detect collisions
  - provides net management functionality

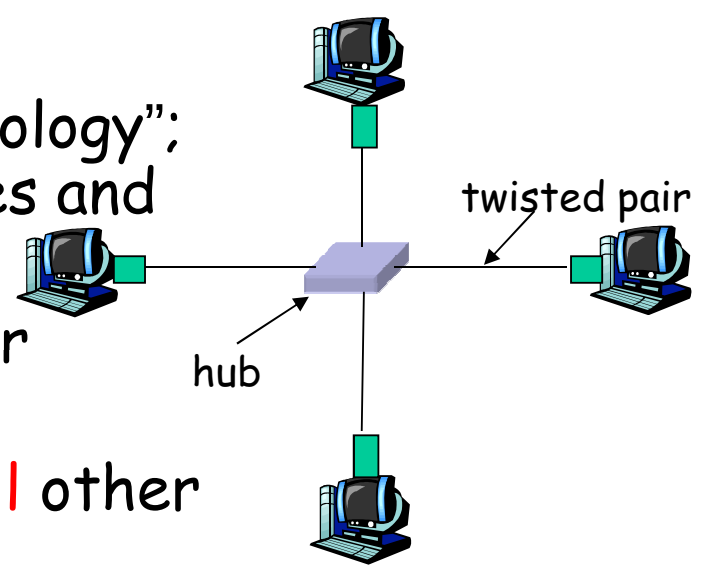

Interconnecting LAN segments

- Hubs
- Bridges
- Switches
  - Remark: switches are essentially multi-port bridges.
  - What we say about bridges also holds for switches!

Interconnecting with hubs

- Backbone hub interconnects LAN segments
- Extends max distance between nodes
- But individual segment collision domains become one large collision domian
  - if a node in CS and a node EE transmit at same time: collision
- Can't interconnect 10BaseT & 100BaseT

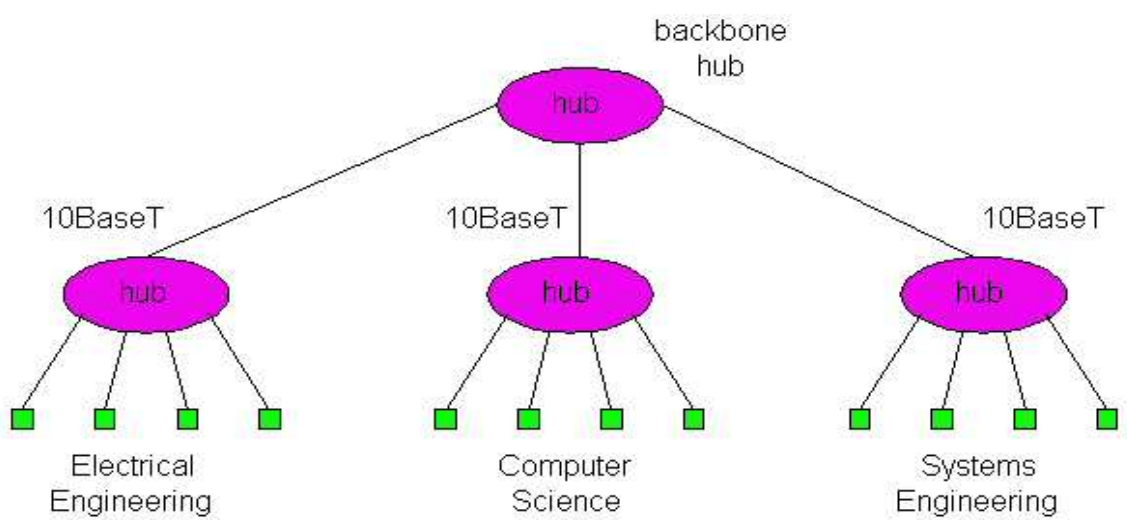

Bridges: traffic isolation

- Bridge installation breaks LAN into LAN segments
- bridges filter packets:
  - same-LAN-segment frames not usually forwarded onto other LAN segments
  - segments become separate collision domains

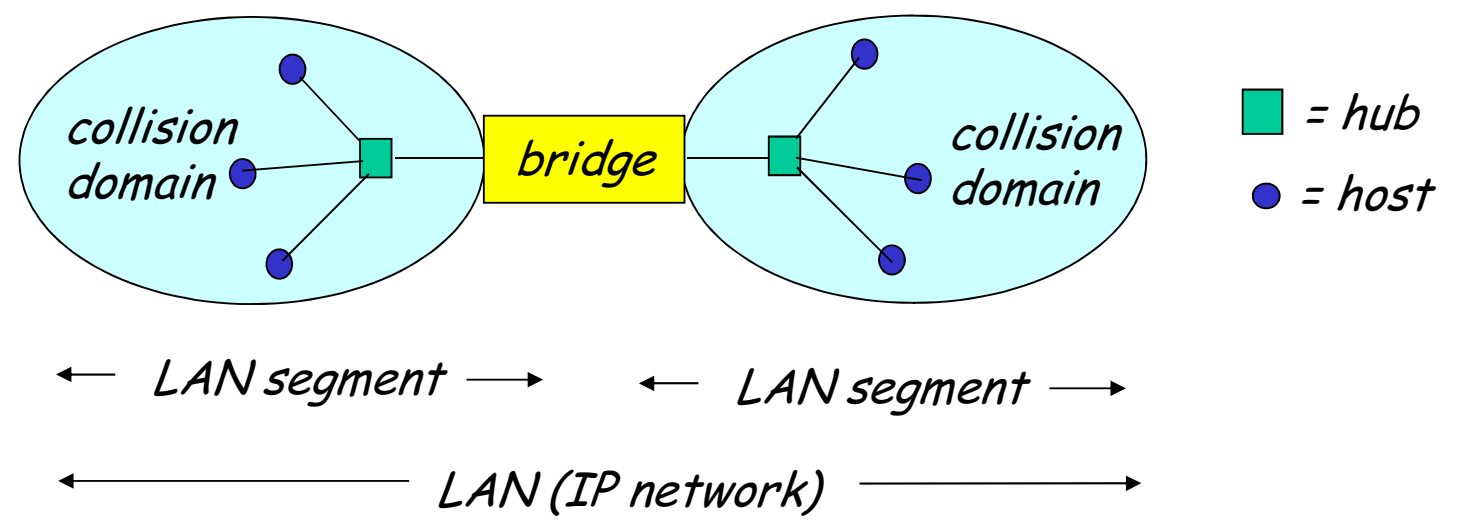

Bridges

Link layer device

- stores and forwards Ethernet frames
- examines frame header and selectively forwards frame based on MAC dest address
- when frame is to be forwarded on segment, uses CSMA/CD to access segment

transparent

- hosts are unaware of presence of bridges

plug-and-play, self-learning

- bridges do not need to be configured

Forwarding

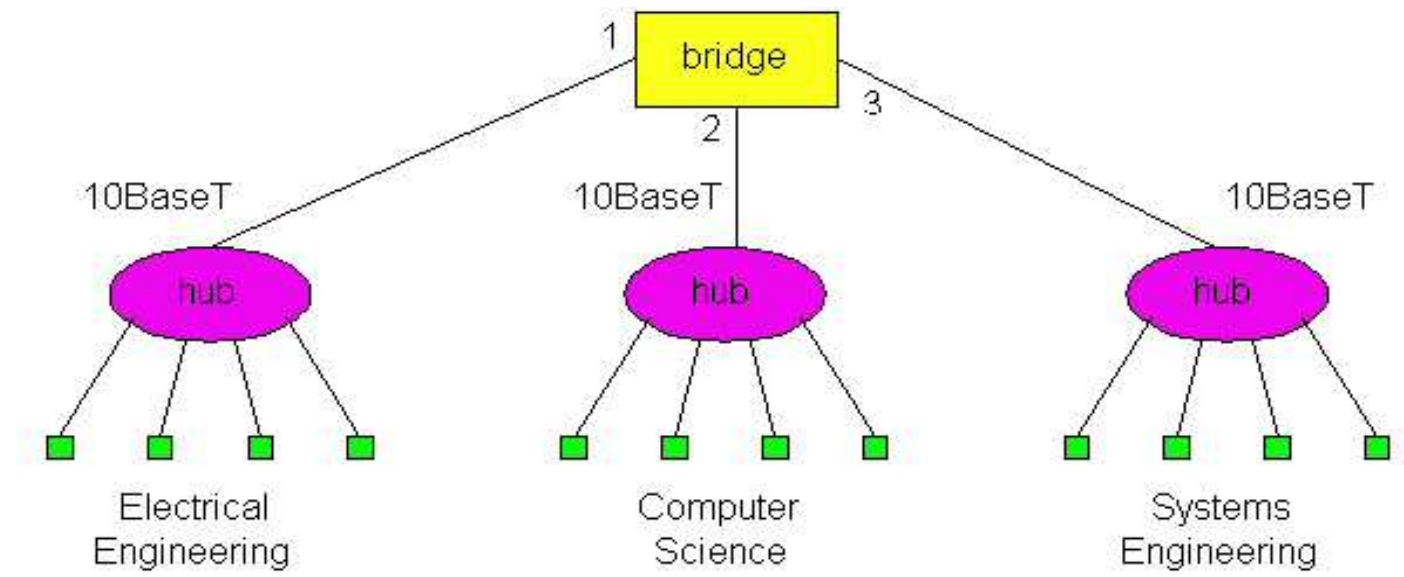

How do determine to which LAN segment to forward frame?

- *Looks like a routing problem...*

Self learning

A bridge has a bridge table

entry in bridge table:

- (Node LAN Address, Bridge Interface, Time Stamp)
- stale entries in table dropped (TTL can be 60 min)

bridges *learn* which hosts can be reached through which interfaces

- when frame received, bridge "learns" location of sender: incoming LAN segment
- records sender/location pair in bridge table

Filtering/Forwarding

When bridge receives a frame:

index bridge table using MAC dest address
if entry found for destination
  then{
    if dest on segment from which frame arrived
      then drop the frame
      else forward the frame on interface indicated
    }
  else flood

forward on all but the interface on which the frame arrived

Interconnection without backbone

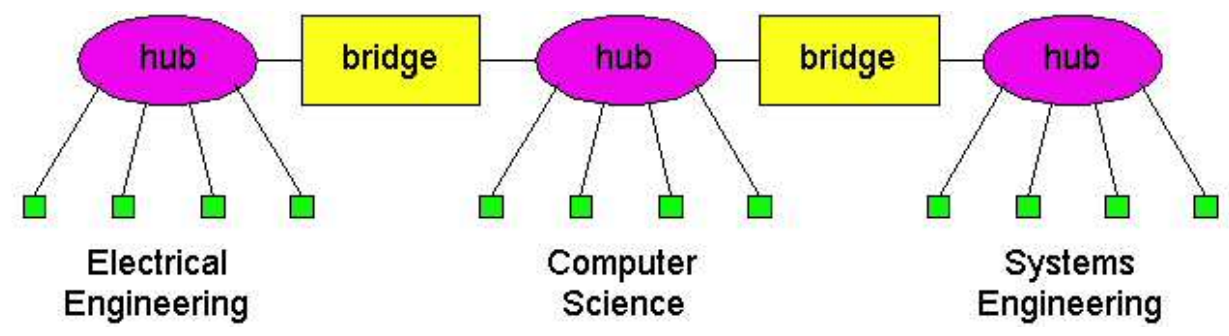

Not recommended for two reasons:
- single point of failure at Computer Science hub
- all traffic between EE and SE must path over CS segment

Backbone configuration

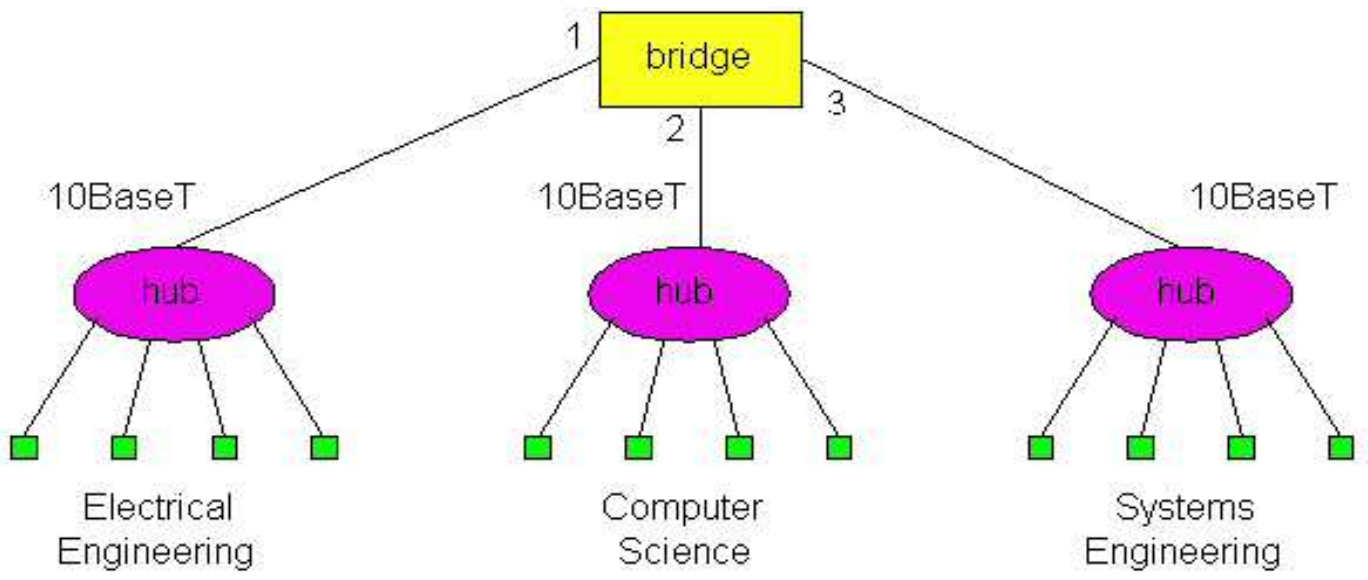

Recommended !

Bridges Spanning Tree

- for increased reliability, desirable to have redundant, alternative paths from source to dest
- with multiple paths, cycles result - bridges may multiply and forward frame forever
- solution: organize bridges in a spanning tree by disabling subset of interfaces

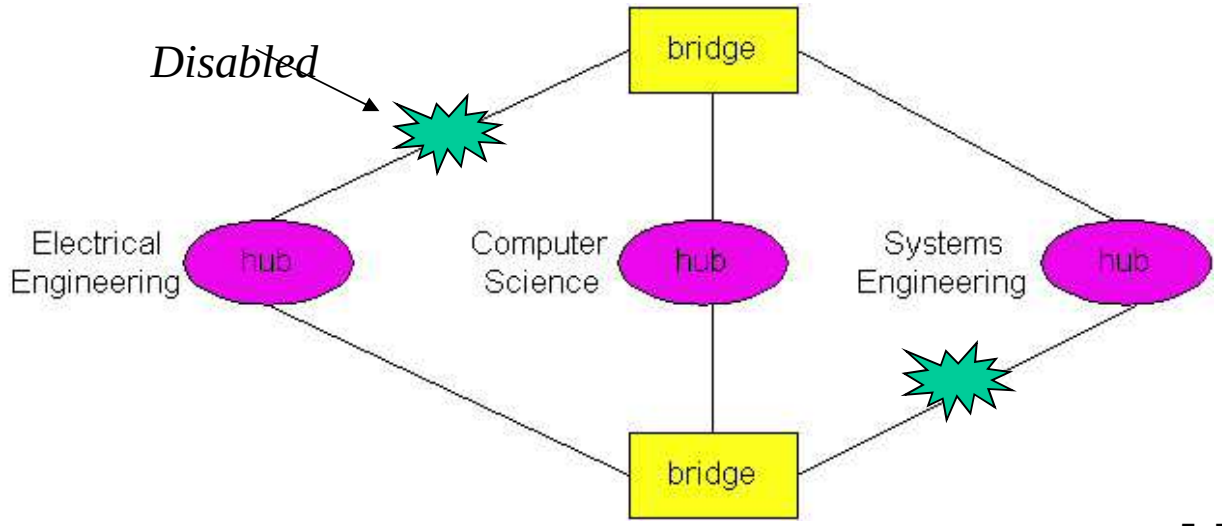

Some bridge features

- Isolates collision domains resulting in higher total max throughput
- limitless number of nodes and geographical coverage
- Can connect different Ethernet types
- Transparent ("plug-and-play"): no configuration necessary

10/100 Base T Bridges->Switch

link-layer device: smarter than hubs, take *active* role

- store, forward Ethernet frames
- selectively forward frame, *transparent, plug-and-play, self-learning*

Essentially a multi-interface bridge

layer 2 (frame) forwarding, filtering using LAN addresses

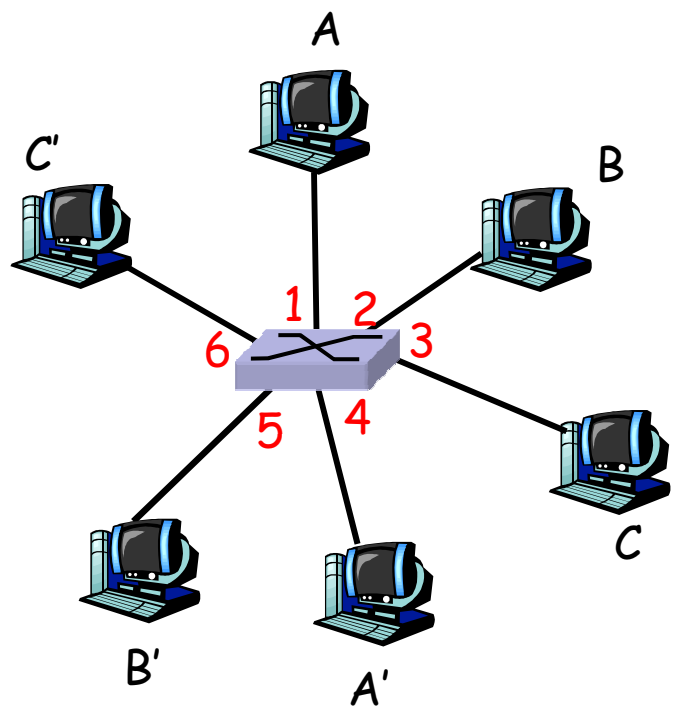

switch with six interfaces (1,2,3,4,5,6)

Switch: self-learning

switch *learns* which hosts can be reached through which interfaces

- when frame received, switch "learns" location of sender: incoming LAN segment
- records sender/location pair in switch table

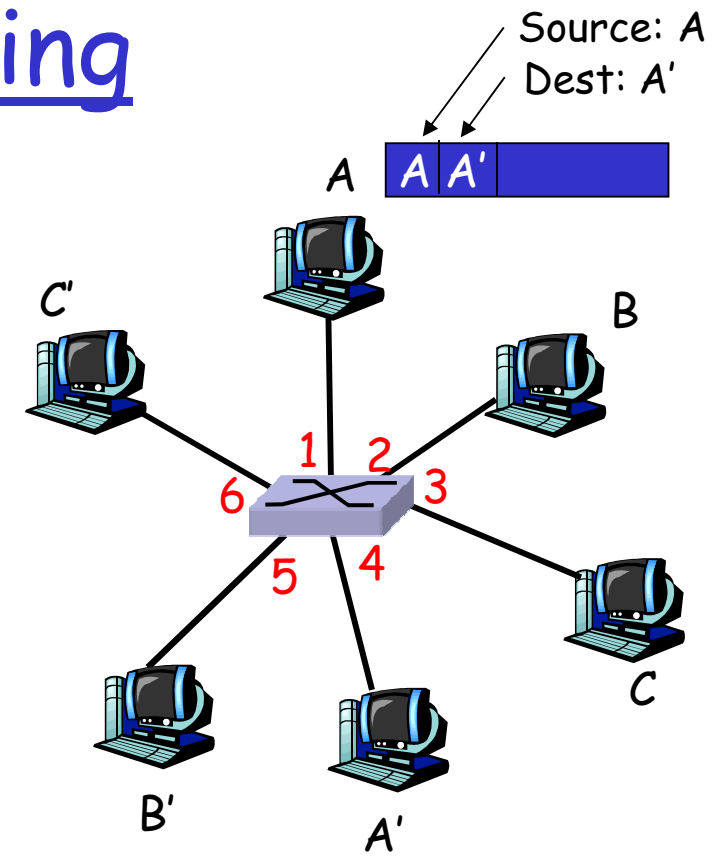

MAC addr	interface	TTL
A	1	60

Switch table (initially empty)

Self-learning, forwarding: example

- frame destination unknown: *flood*
- destination A location known: *selective send*

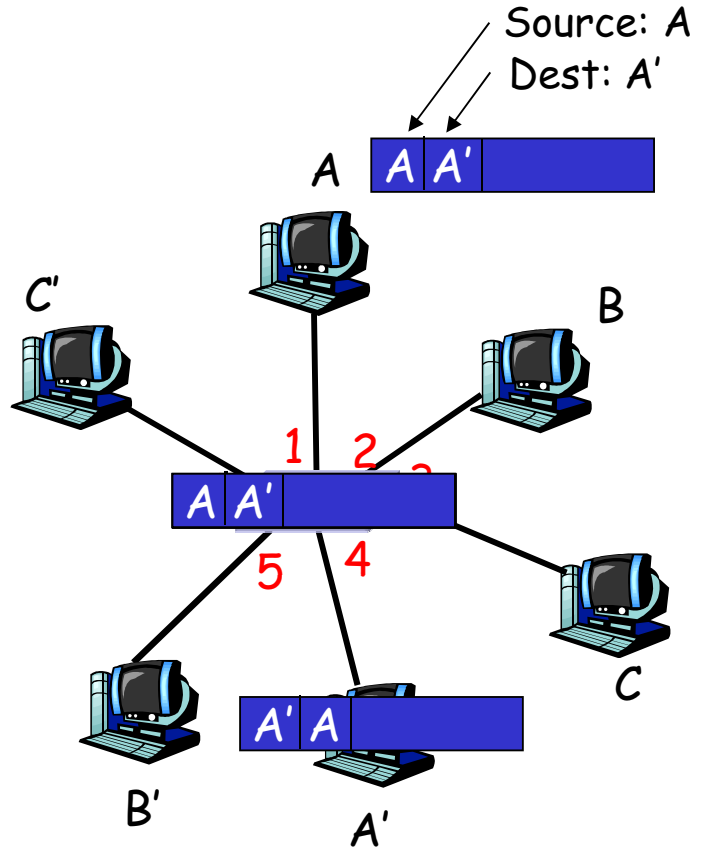

MAC addr	interface	TTL
A A'	1 4	60 60

Switch table (initially empty)

Interconnecting switches

switches can be connected together

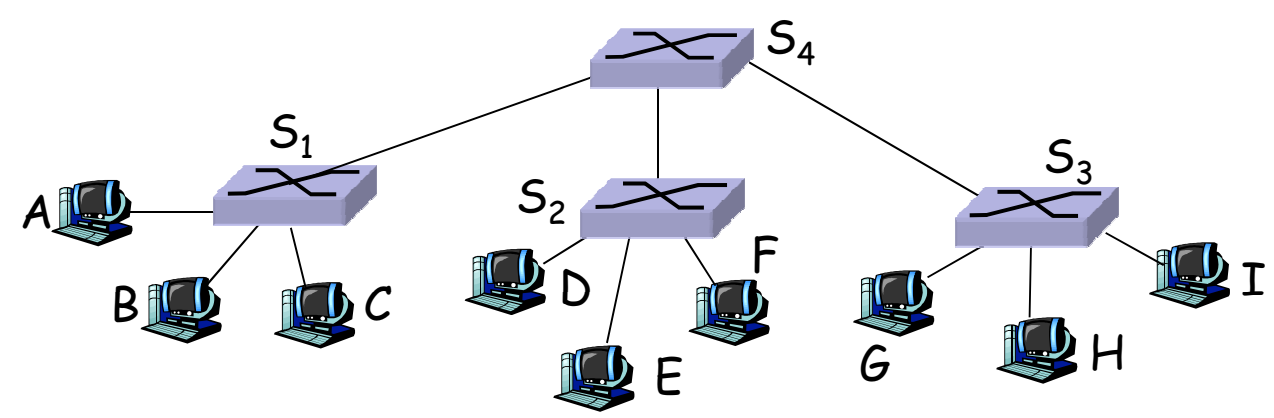

Q: sending from A to G - how does S_1 know to forward frame destined to F via S_4 and S_3?

A: self learning! (works exactly the same as in single-switch case!)

Self-learning multi-switch example

Suppose C sends frame to I, I responds to C

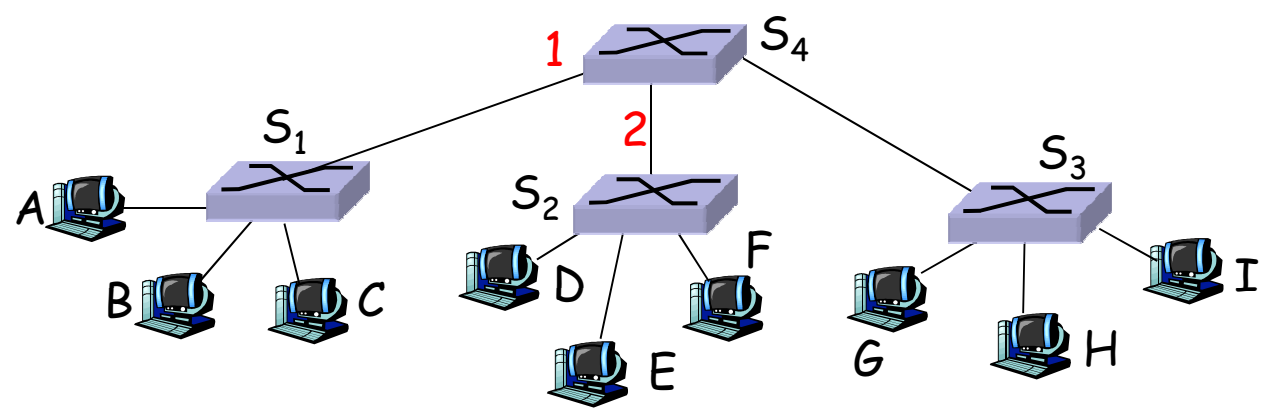

Q: show switch tables and packet forwarding in S_1, S_2, S_3, S_4

Institutional network

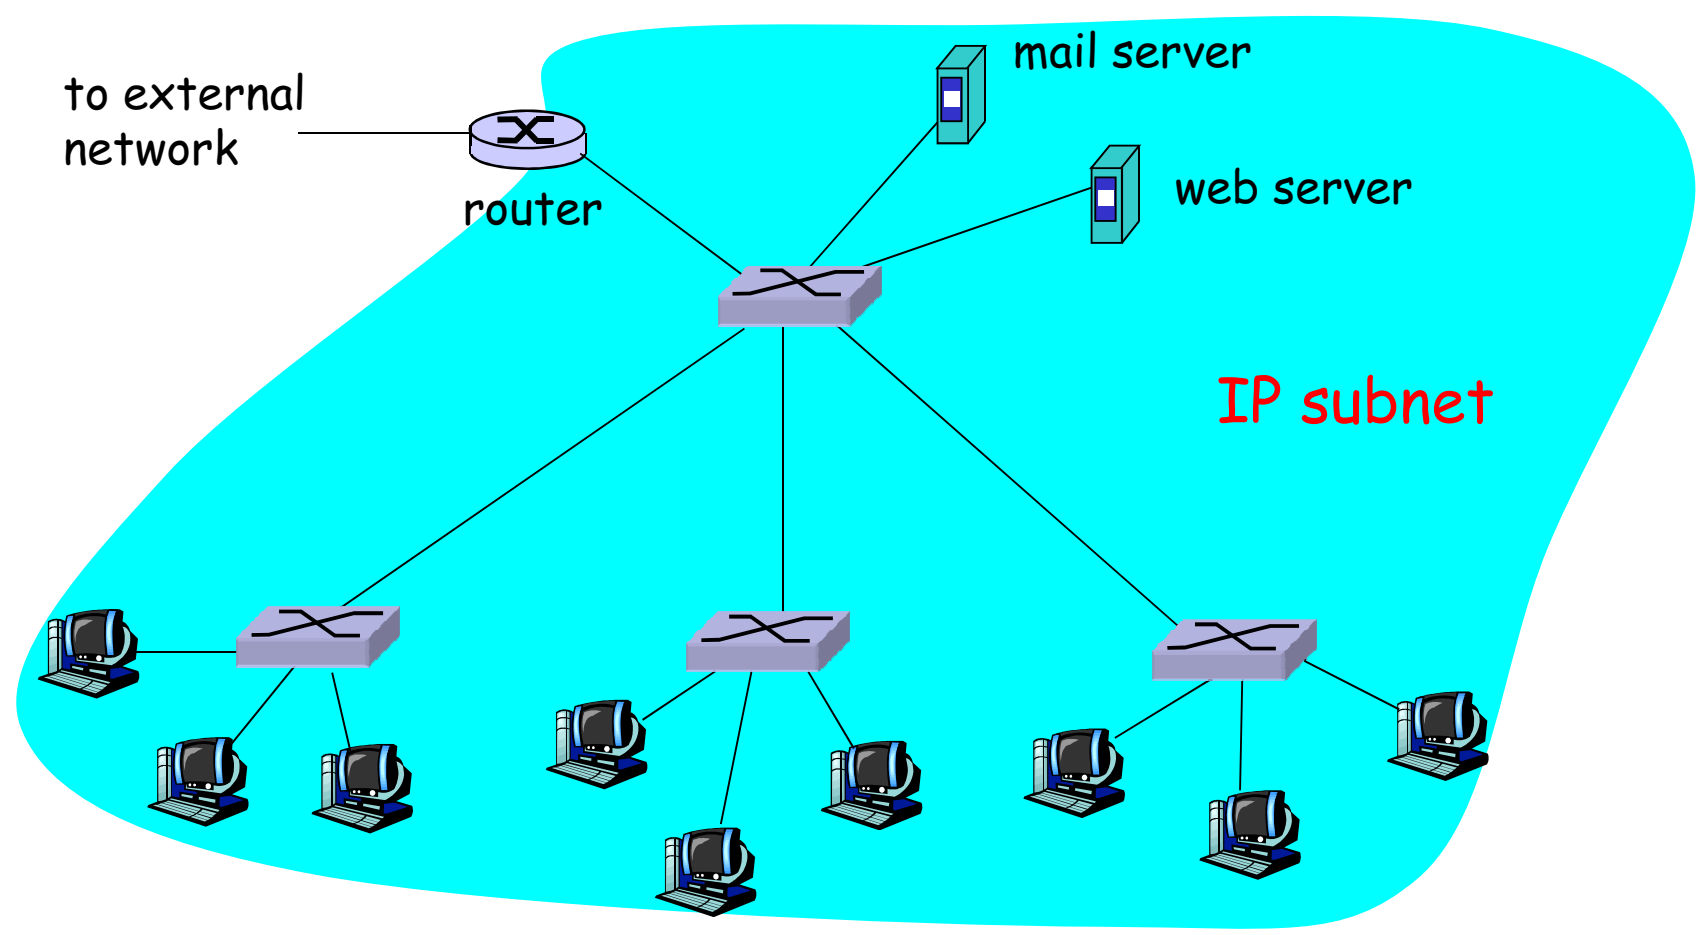

Switches vs. Routers

- both store-and-forward devices
  - routers: network layer devices (examine network layer headers)
  - switches are link layer devices
- routers maintain routing tables, implement routing algorithms
- switches maintain switch tables, implement filtering, learning algorithms

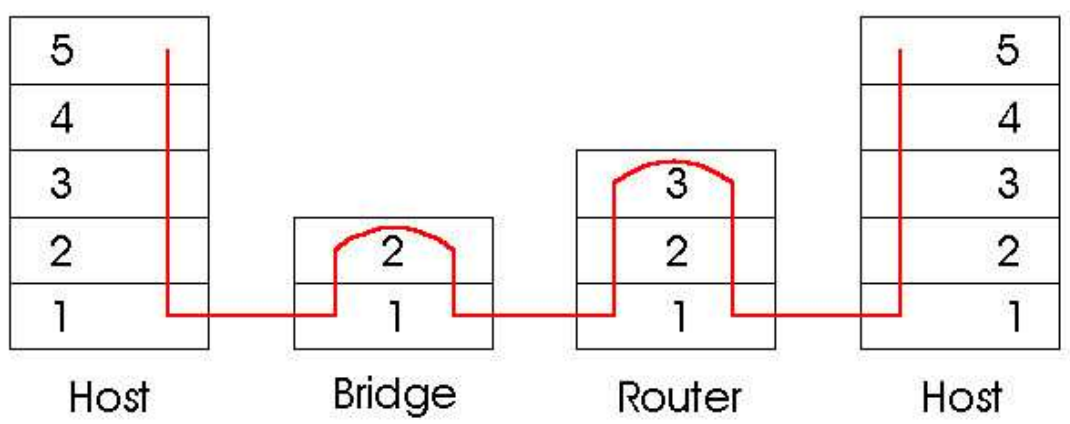

Routers vs. Bridges

Bridges + and -

\+ Bridge operation is simpler requiring less packet processing

\+ Bridge tables are self learning

\- All traffic confined to spanning tree, even when alternative bandwidth is available

\- Bridges do not offer protection from broadcast storms

Routers vs. Bridges

Routers + and -

+ arbitrary topologies can be supported, cycling is limited by TTL counters (and good routing protocols)
+ provide protection against broadcast storms
- require IP address configuration (not plug and play)
- require higher packet processing

bridges do well in small (few hundred hosts) while routers used in large networks (thousands of hosts)

Synthesis: a day in the life of a web request

- journey down protocol stack complete!
  - application, transport, network, link
- putting-it-all-together: synthesis!
  - *goal:* identify, review, understand protocols (at all layers) involved in seemingly simple scenario: requesting www page
  - *scenario:* student attaches laptop to campus network, requests/receives www.google.com

A day in the life: scenario

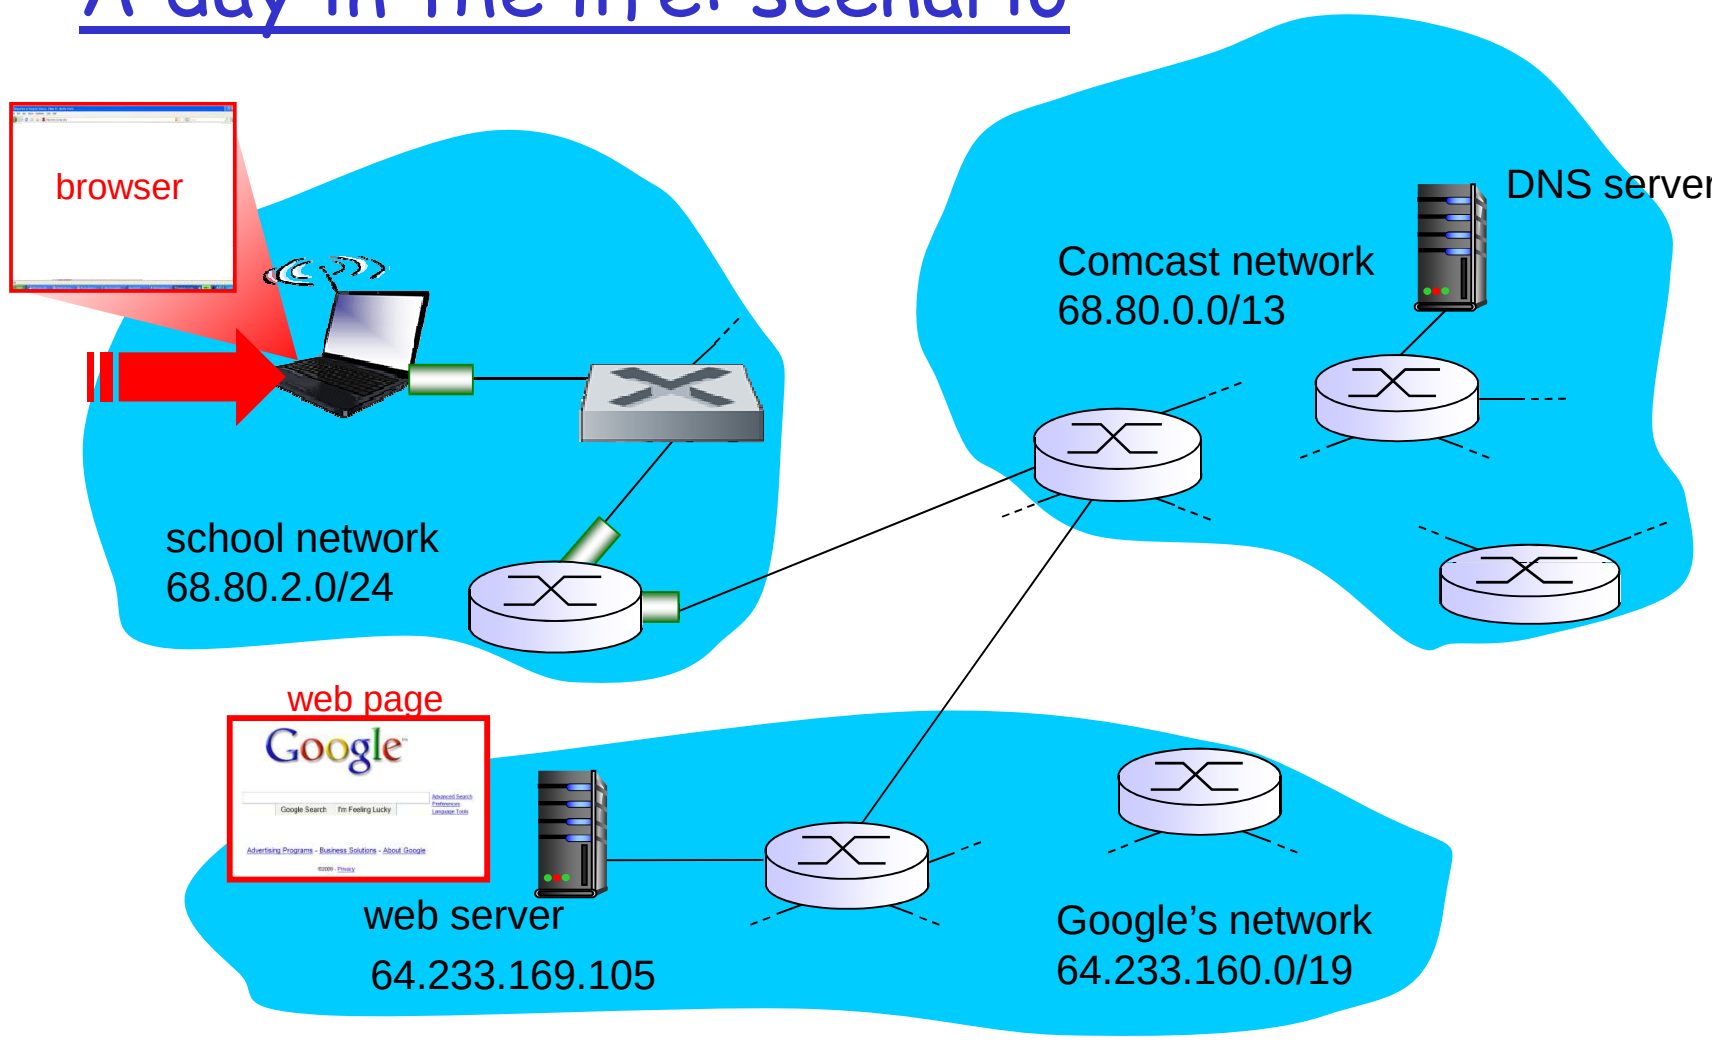

A day in the life… connecting to the Internet

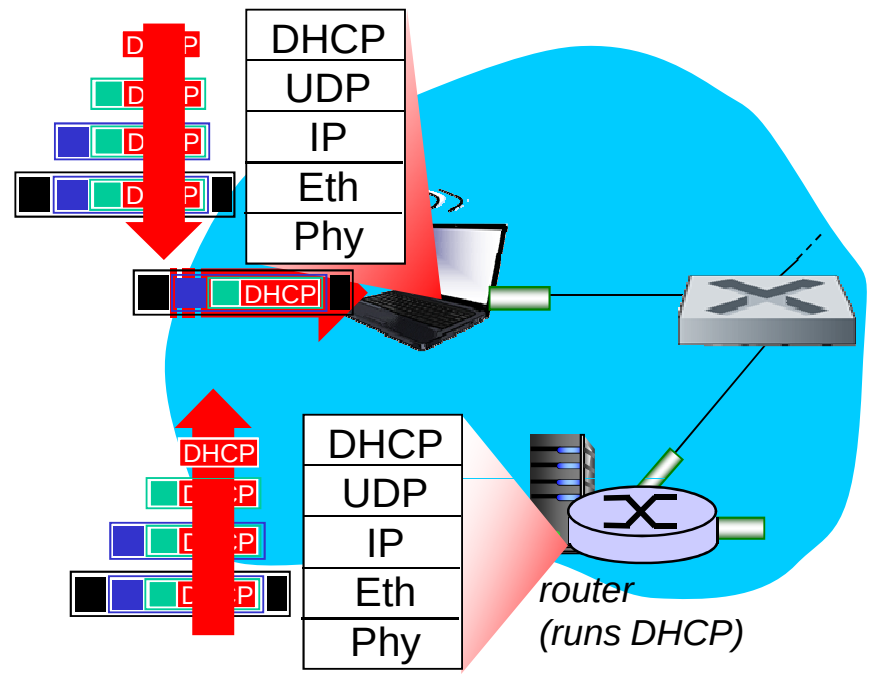

- connecting laptop needs to get its own IP address, addr of first-hop router, addr of DNS server: use *DHCP*
- DHCP request *encapsulated* in *UDP*, encapsulated in *IP*, encapsulated in *802.3* Ethernet
- Ethernet frame *broadcast* (dest: FFFFFFFFFFFF) on LAN, received at router running *DHCP* server
- Ethernet *demuxed* to IP demuxed, UDP demuxed to DHCP

A day in the life... connecting to the Internet

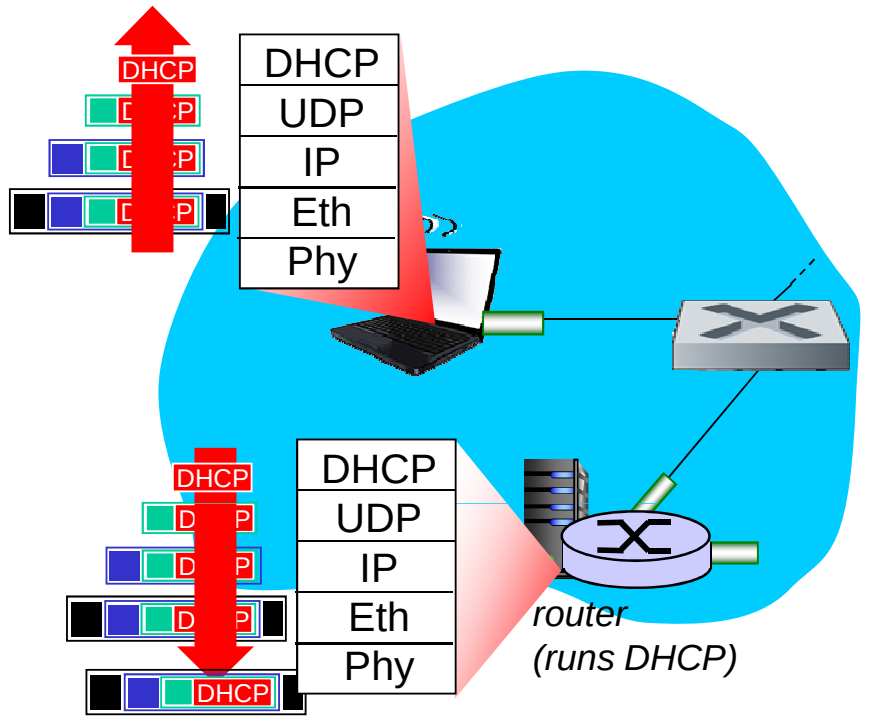

DHCP server formulates *DHCP ACK* containing client's IP address, IP address of first-hop router for client, name & IP address of DNS server

- encapsulation at DHCP server, frame forwarded (*switch learning*) through LAN, demultiplexing at client
- DHCP client receives DHCP ACK reply

Client now has IP address, knows name & addr of DNS server, IP address of its first-hop router

A day in the life... ARP (before DNS, before HTTP)

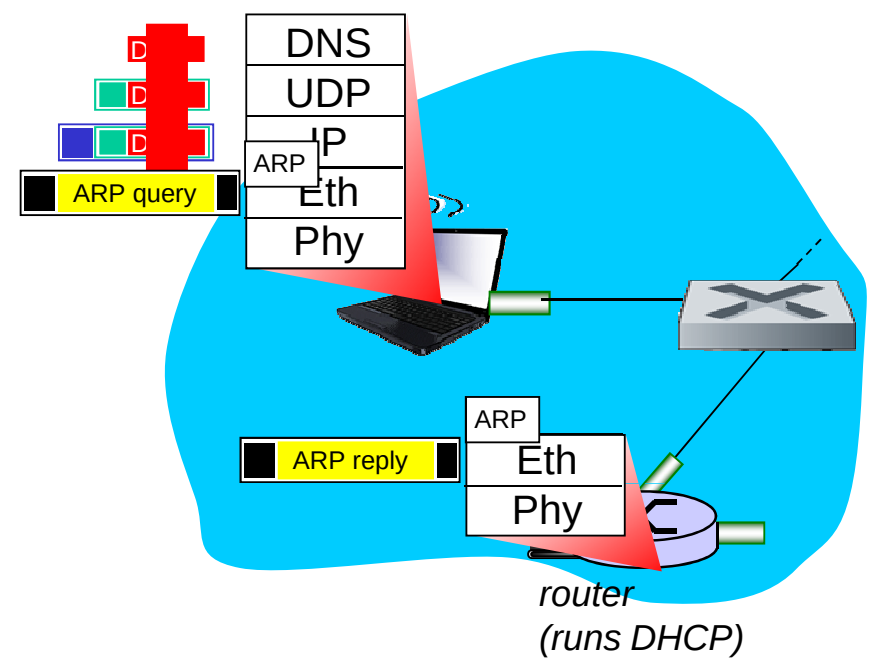

- before sending *HTTP* request, need IP address of www.google.com: *DNS*
- DNS query created, encapsulated in UDP, encapsulated in IP, encapsulated in Eth. To send frame to router, need MAC address of router interface: *ARP*
- *ARP query* broadcast, received by router, which replies with *ARP reply* giving MAC address of router interface
- client now knows MAC address of first hop router, so can now send frame containing DNS query

A day in the life... using DNS

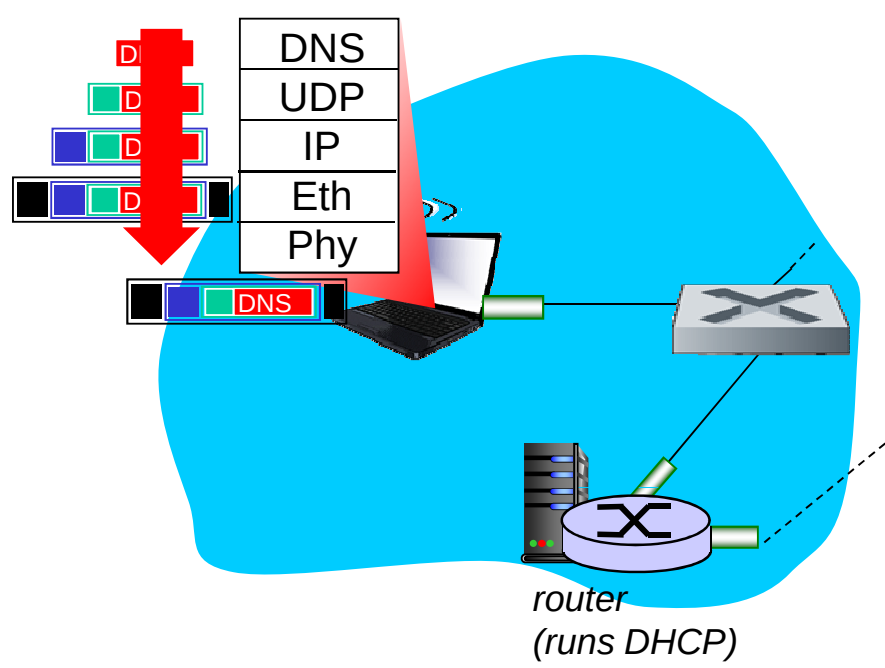

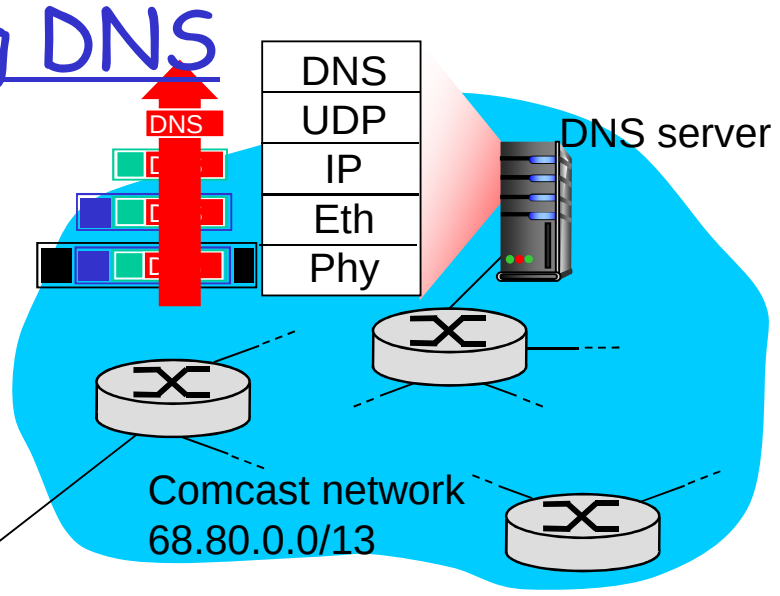

- IP datagram containing DNS query forwarded via LAN switch from client to 1st hop router
- IP datagram forwarded from campus network into comcast network, routed (tables created by *RIP, OSPF, IS-IS* and/or *BGP* routing protocols) to DNS server
- demux'ed to DNS server
- DNS server replies to client with IP address of www.google.com

A day in the life...TCP connection carrying HTTP

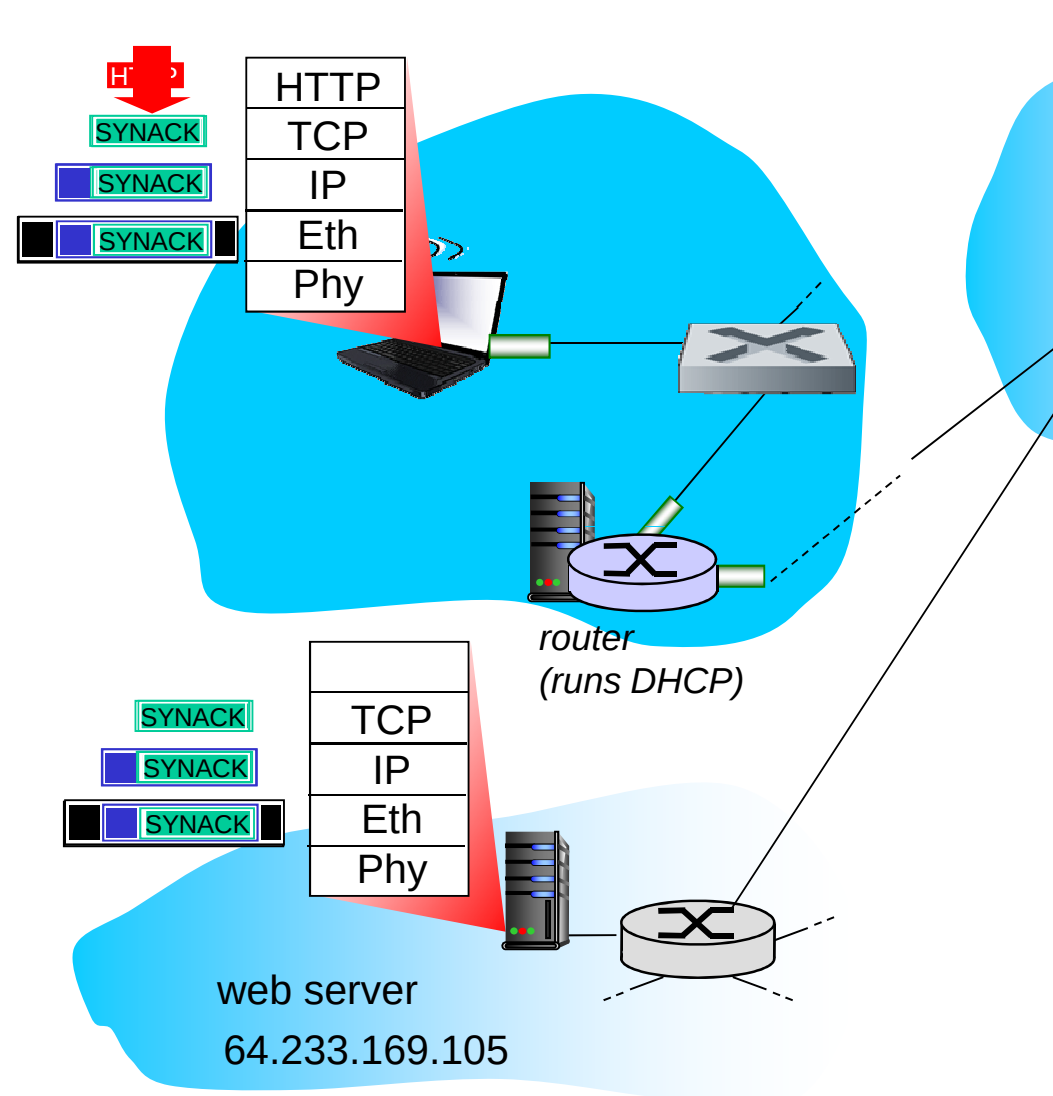

- to send HTTP request, client first opens *TCP socket* to web server
- TCP *SYN segment* (step 1 in 3-way handshake) *inter-domain routed* to web server
- web server responds with *TCP SYNACK* (step 2 in 3-way handshake)
- TCP *connection established!*

A day in the life... HTTP request/reply

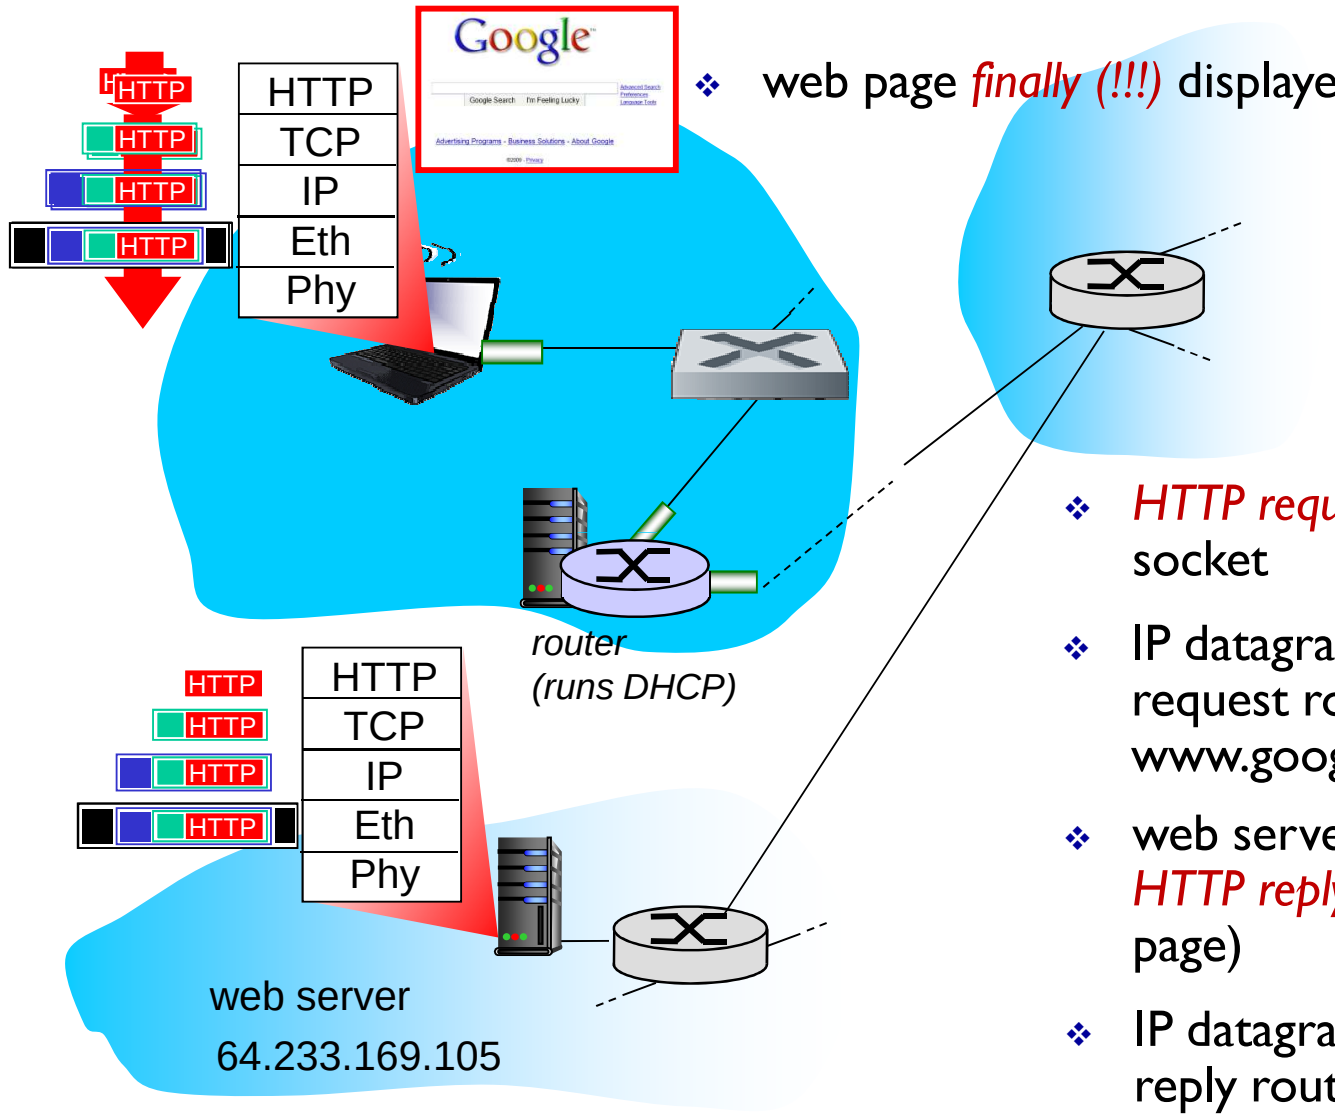

- web page *finally (!!!)* displayed

- *HTTP request* sent into TCP socket
- IP datagram containing HTTP request routed to www.google.com
- web server responds with *HTTP reply* (containing web page)
- IP datagram containing HTTP reply routed back to client