MC14001B Series

B-Suffix Series CMOS Gates

MC14001B, MC14011B, MC14023B, MC14025B, MC14071B, MC14073B, MC14081B, MC14082B

The B Series logic gates are constructed with P and N channel enhancement mode devices in a single monolithic structure (Complementary MOS). Their primary use is where low power dissipation and/or high noise immunity is desired.

- Supply Voltage Range = 3.0 Vdc to 18 Vdc
- All Outputs Buffered
- Capable of Driving Two Low−power TTL Loads or One Low−power Schottky TTL Load Over the Rated Temperature Range.
- Double Diode Protection on All Inputs Except: Triple Diode Protection on MC14011B and MC14081B
- Pin−for−Pin Replacements for Corresponding CD4000 Series B Suffix Devices

MAXIMUM RATINGS (Voltages Referenced to V_{SS}) (Note 1)

Symbol	Parameter	Value	Unit
V_{DD}	DC Supply Voltage Range	−0.5 to +18.0	V
V_{in}, V_{out}	Input or Output Voltage Range (DC or Transient)	−0.5 to V_{DD} + 0.5	V
I_{in}, I_{out}	Input or Output Current (DC or Transient) per Pin	±10	mA
P_D	Power Dissipation, per Package (Note 2)	500	mW
T_A	Ambient Temperature Range	−55 to +125	°C
T_{stg}	Storage Temperature Range	−65 to +150	°C
T_L	Lead Temperature (8−Second Soldering)	260	°C

1. Maximum Ratings are those values beyond which damage to the device may occur.
2. Temperature Derating:
   Plastic “P and D/DW” Packages: – 7.0 mW/°C From 65°C To 125°C

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high−impedance circuit. For proper operation, V_{in} and V_{out} should be constrained to the range $V_{SS} \le (V_{in}$ or $V_{out}) \le V_{DD}$.

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either V_{SS} or V_{DD}). Unused outputs must be left open.

ON Semiconductor®

http://onsemi.com

MARKING DIAGRAMS



PDIP−14
P SUFFIX
CASE 646



SOIC−14
D SUFFIX
CASE 751A



TSSOP−14
DT SUFFIX
CASE 948G





SOEIAJ−14
F SUFFIX
CASE 965



xx = Specific Device Code
A = Assembly Location
WL, L = Wafer Lot
YY, Y = Year
WW, W = Work Week

DEVICE INFORMATION

Device	Description
MC14001B	Quad 2−Input NOR Gate
MC14011B	Quad 2−Input NAND Gate
MC14023B	Triple 3−Input NAND Gate
MC14025B	Triple 3−Input NOR Gate
MC14071B	Quad 2−Input OR Gate
MC14073B	Triple 3−Input AND Gate
MC14081B	Quad 2−Input AND Gate
MC14082B	Dual 4−Input AND Gate

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 19 of this data sheet.

LOGIC DIAGRAMS

NOR | NAND | OR | AND

MC14001B
Quad 2−Input NOR Gate



MC14011B
Quad 2−Input NAND Gate



MC14071B
Quad 2−Input OR Gate



MC14081B
Quad 2−Input AND Gate



MC14025B
Triple 3−Input NOR Gate



MC14023B
Triple 3−Input NAND Gate



MC14073B
Triple 3−Input AND Gate



MC14082B
Dual 4−Input AND Gate



V_{DD} = PIN 14
V_{SS} = PIN 7
FOR ALL DEVICES

PIN ASSIGNMENTS

MC14001B
Quad 2−Input NOR Gate



MC14011B
Quad 2−Input NAND Gate



MC14023B
Triple 3−Input NAND Gate



MC14025B
Triple 3−Input NOR Gate



MC14071B
Quad 2−Input OR Gate



MC14073B
Triple 3−Input AND Gate



MC14081B
Quad 2−Input AND Gate



MC14082B
Dual 4−Input AND Gate



NC = NO CONNECTION

ELECTRICAL CHARACTERISTICS (Voltages Referenced to V_{SS})

Characteristic	Symbol	V_{DD} Vdc	− 55°C Min	− 55°C Max	25°C Min	25°C Typ (3)	25°C Max	125°C Min	125°C Max	Unit
Output Voltage “0” Level	V_{OL}	5.0	—	0.05	—	0	0.05	—	0.05	Vdc
V_{in} = V_{DD} or 0		10	—	0.05	—	0	0.05	—	0.05	
		15	—	0.05	—	0	0.05	—	0.05	
“1” Level	V_{OH}	5.0	4.95	—	4.95	5.0	—	4.95	—	Vdc
V_{in} = 0 or V_{DD}		10	9.95	—	9.95	10	—	9.95	—	
		15	14.95	—	14.95	15	—	14.95	—	
Input Voltage “0” Level	V_{IL}									Vdc
(V_O = 4.5 or 0.5 Vdc)		5.0	—	1.5	—	2.25	1.5	—	1.5	
(V_O = 9.0 or 1.0 Vdc)		10	—	3.0	—	4.50	3.0	—	3.0	
(V_O = 13.5 or 1.5 Vdc)		15	—	4.0	—	6.75	4.0	—	4.0	
“1” Level	V_{IH}									Vdc
(V_O = 0.5 or 4.5 Vdc)		5.0	3.5	—	3.5	2.75	—	3.5	—	
(V_O = 1.0 or 9.0 Vdc)		10	7.0	—	7.0	5.50	—	7.0	—	
(V_O = 1.5 or 13.5 Vdc)		15	11	—	11	8.25	—	11	—	
Output Drive Current	I_{OH}									mAdc
(V_{OH} = 2.5 Vdc) Source		5.0	– 3.0	—	– 2.4	– 4.2	—	– 1.7	—	
(V_{OH} = 4.6 Vdc)		5.0	– 0.64	—	– 0.51	– 0.88	—	– 0.36	—	
(V_{OH} = 9.5 Vdc)		10	– 1.6	—	– 1.3	– 2.25	—	– 0.9	—	
(V_{OH} = 13.5 Vdc)		15	– 4.2	—	– 3.4	– 8.8	—	– 2.4	—	
(V_{OL} = 0.4 Vdc) Sink	I_{OL}	5.0	0.64	—	0.51	0.88	—	0.36	—	mAdc
(V_{OL} = 0.5 Vdc)		10	1.6	—	1.3	2.25	—	0.9	—	
(V_{OL} = 1.5 Vdc)		15	4.2	—	3.4	8.8	—	2.4	—	
Input Current	I_{in}	15	—	± 0.1	—	±0.00001	± 0.1	—	± 1.0	µAdc
Input Capacitance (V_{in} = 0)	C_{in}	—	—	—	—	5.0	7.5	—	—	pF
Quiescent Current (Per Package)	I_{DD}	5.0	—	0.25	—	0.0005	0.25	—	7.5	µAdc
		10	—	0.5	—	0.0010	0.5	—	15	
		15	—	1.0	—	0.0015	1.0	—	30	
Total Supply Current (4) (5) (Dynamic plus Quiescent, Per Gate, C_L = 50 pF)	I_T	5.0	I_T = (0.3 µA/kHz) f + I_{DD}/N							µAdc
		10	I_T = (0.6 µA/kHz) f + I_{DD}/N							
		15	I_T = (0.9 µA/kHz) f + I_{DD}/N							

3. Data labelled “Typ” is not to be used for design purposes but is intended as an indication of the IC’s potential performance.
4. The formulas given are for the typical characteristics only at 25°C.
5. To calculate total supply current at loads other than 50 pF:

$$I_T(C_L) = I_T(50\ pF) + (C_L - 50)\ Vfk$$

where: I_T is in µA (per package), C_L in pF, V = (V_{DD} − V_{SS}) in volts, f in kHz is input frequency, and k = 0.001 x the number of exercised gates per package.

B−SERIES GATE SWITCHING TIMES

SWITCHING CHARACTERISTICS [6] (C_L = 50 pF, T_A = 25°C)

Characteristic	Symbol	V_{DD} Vdc	Min	Typ [7]	Max	Unit
Output Rise Time, All B−Series Gates	t_{TLH}					ns
t_{TLH} = (1.35 ns/pF) C_L + 33 ns		5.0	—	100	200	
t_{TLH} = (0.60 ns/pF) C_L + 20 ns		10	—	50	100	
t_{TLH} = (0.40 ns/PF) C_L + 20 ns		15	—	40	80	
Output Fall Time, All B−Series Gates	t_{THL}					ns
t_{THL} = (1.35 ns/pF) C_L + 33 ns		5.0	—	100	200	
t_{THL} = (0.60 ns/pF) C_L + 20 ns		10	—	50	100	
t_{THL} = (0.40 ns/pF) C_L + 20 ns		15	—	40	80	
Propagation Delay Time	t_{PLH}, t_{PHL}					ns
MC14001B, MC14011B only						
t_{PLH}, t_{PHL} = (0.90 ns/pF) C_L + 80 ns		5.0	—	125	250	
t_{PLH}, t_{PHL} = (0.36 ns/pF) C_L + 32 ns		10	—	50	100	
t_{PLH}, t_{PHL} = (0.26 ns/pF) C_L + 27 ns		15	—	40	80	
All Other 2, 3, and 4 Input Gates						
t_{PLH}, t_{PHL} = (0.90 ns/pF) C_L + 115 ns		5.0	—	160	300	
t_{PLH}, t_{PHL} = (0.36 ns/pF) C_L + 47 ns		10	—	65	130	
t_{PLH}, t_{PHL} = (0.26 ns/pF) C_L + 37 ns		15	—	50	100	
8−Input Gates (MC14068B, MC14078B)						
t_{PLH}, t_{PHL} = (0.90 ns/pF) C_L + 155 ns		5.0	—	200	350	
t_{PLH}, t_{PHL} = (0.36 ns/pF) C_L + 62 ns		10	—	80	150	
t_{PLH}, t_{PHL} = (0.26 ns/pF) C_L + 47 ns		15	—	60	110	

6. The formulas given are for the typical characteristics only at 25°C.
7. Data labelled “Typ” is not to be used for design purposes but is intended as an indication of the IC’s potential performance.

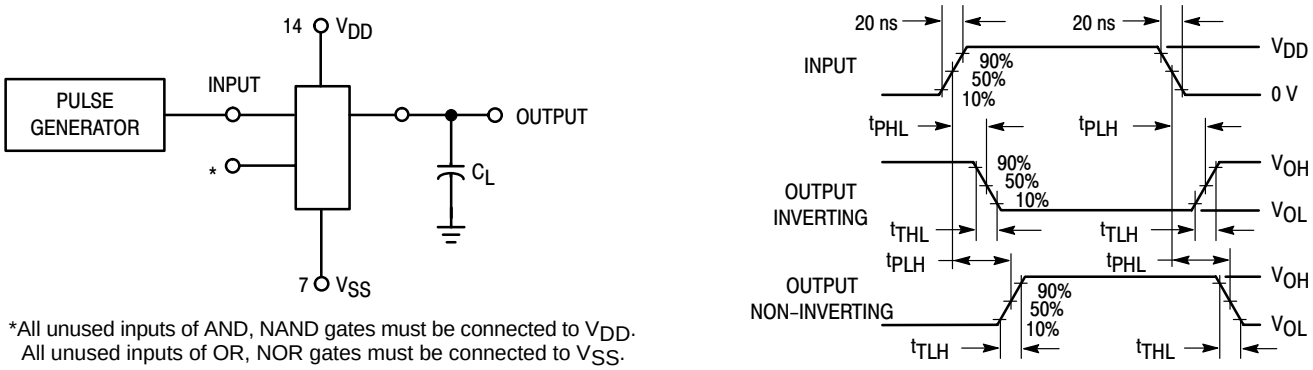

*All unused inputs of AND, NAND gates must be connected to V_{DD}.
All unused inputs of OR, NOR gates must be connected to V_{SS}.

Figure 1. Switching Time Test Circuit and Waveforms

CIRCUIT SCHEMATIC
NOR, OR GATES

MC14001B, MC14071B
One of Four Gates Shown

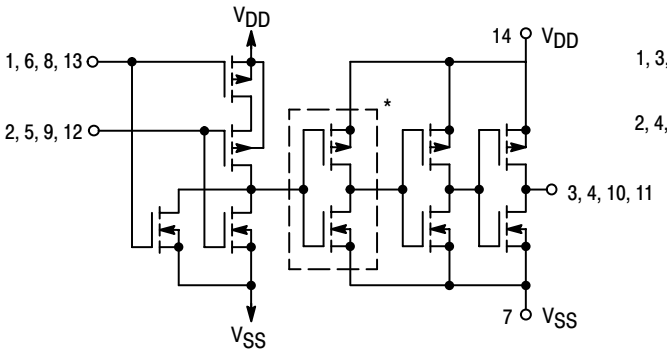

*Inverter omitted in MC14001B

MC14025B
One of Three Gates Shown

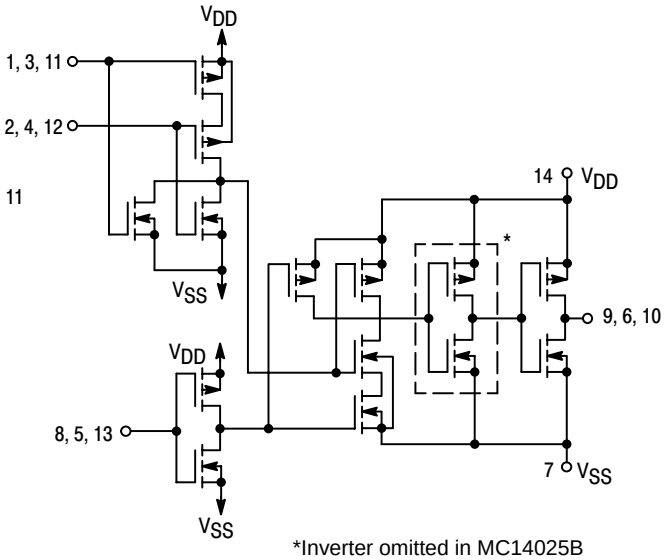

*Inverter omitted in MC14025B

CIRCUIT SCHEMATIC
NAND, AND GATES

MC14023B, MC14073B
One of Three Gates Shown

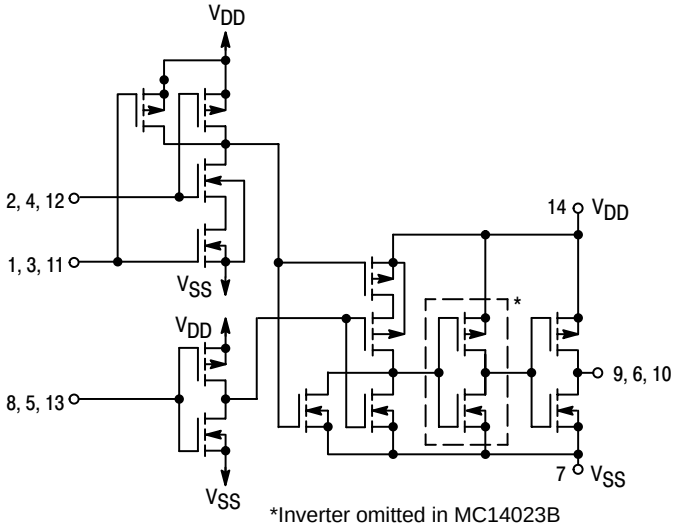

*Inverter omitted in MC14023B

MC14011B, MC14081B
One of Four Gates Shown

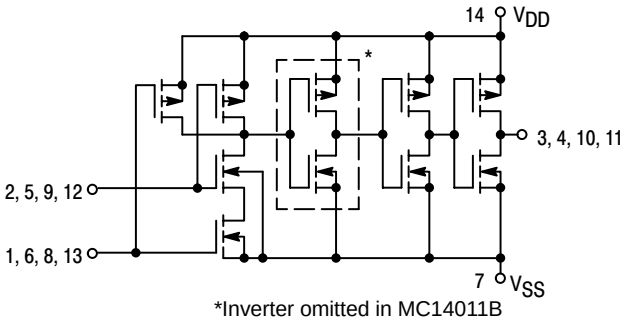

*Inverter omitted in MC14011B

TYPICAL B−SERIES GATE CHARACTERISTICS

N−CHANNEL DRAIN CURRENT (SINK)

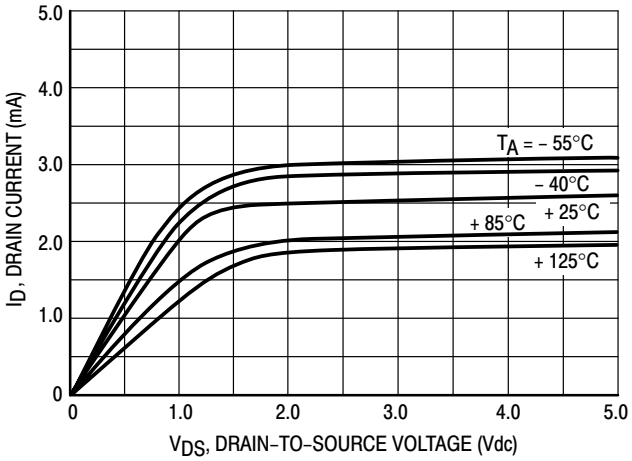

Figure 2. V_{GS} = 5.0 Vdc

P−CHANNEL DRAIN CURRENT (SOURCE)

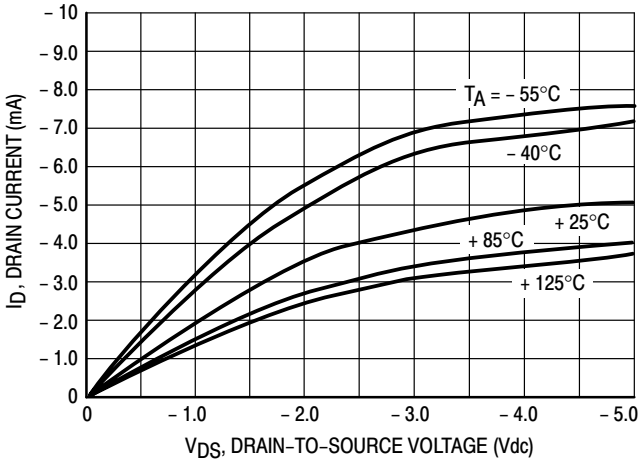

Figure 3. V_{GS} = − 5.0 Vdc

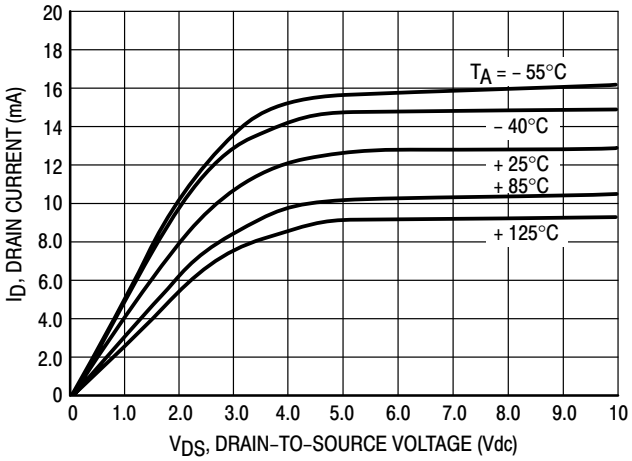

Figure 4. V_{GS} = 10 Vdc

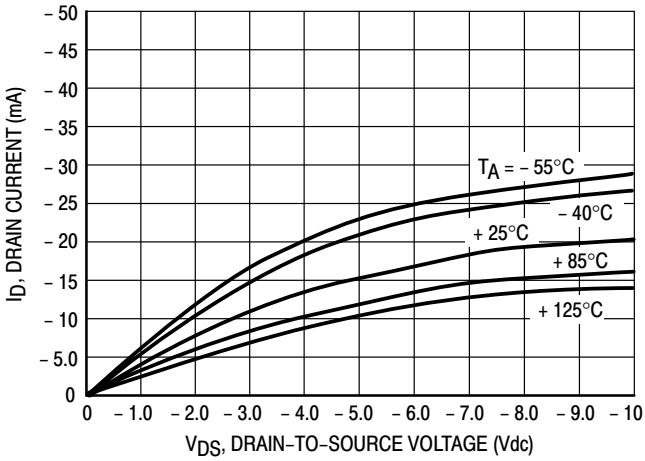

Figure 5. V_{GS} = − 10 Vdc

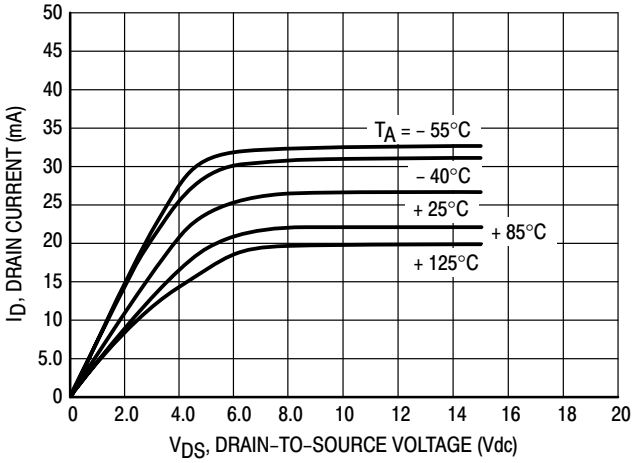

Figure 6. V_{GS} = 15 Vdc

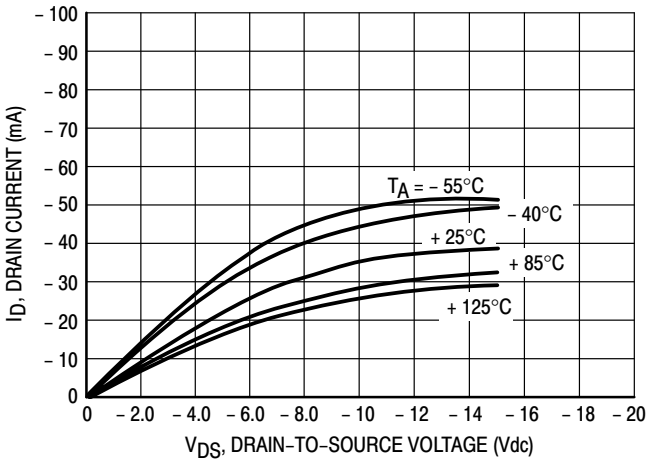

Figure 7. V_{GS} = − 15 Vdc

These typical curves are not guarantees, but are design aids.
Caution: The maximum rating for output current is 10 mA per pin.

TYPICAL B−SERIES GATE CHARACTERISTICS (cont'd)

VOLTAGE TRANSFER CHARACTERISTICS

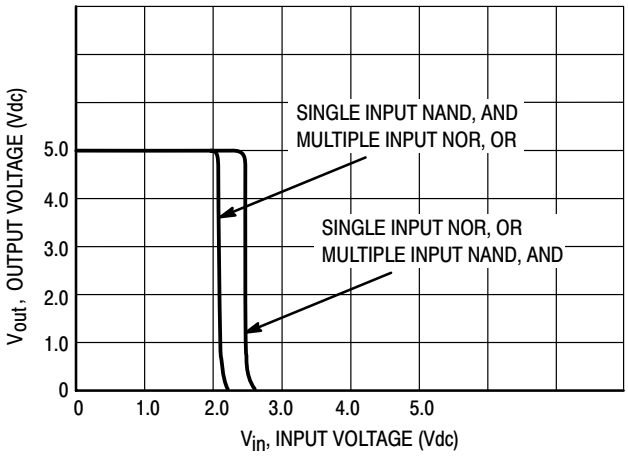

Figure 8. V_{DD} = 5.0 Vdc

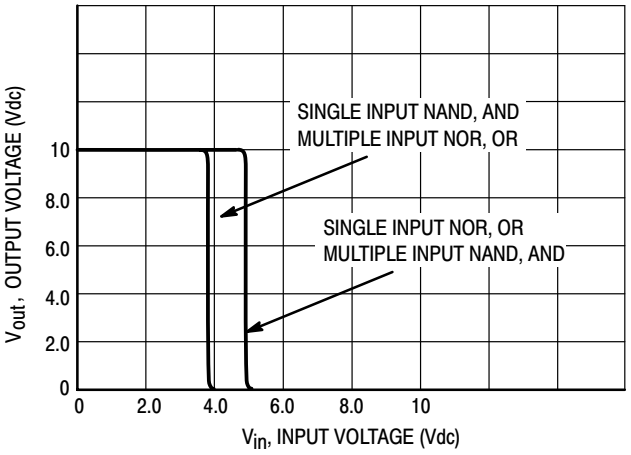

Figure 9. V_{DD} = 10 Vdc

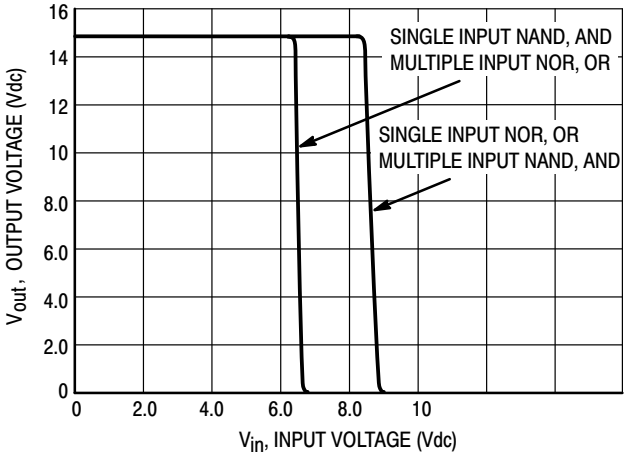

Figure 10. V_{DD} = 15 Vdc

DC NOISE MARGIN

The DC noise margin is defined as the input voltage range from an ideal "1" or "0" input level which does not produce output state change(s). The typical and guaranteed limit values of the input values V_{IL} and V_{IH} for the output(s) to be at a fixed voltage V_O are given in the Electrical Characteristics table. V_{IL} and V_{IH} are presented graphically in Figure 11.

Guaranteed minimum noise margins for both the "1" and "0" levels =

1.0 V with a 5.0 V supply
2.0 V with a 10.0 V supply
2.5 V with a 15.0 V supply

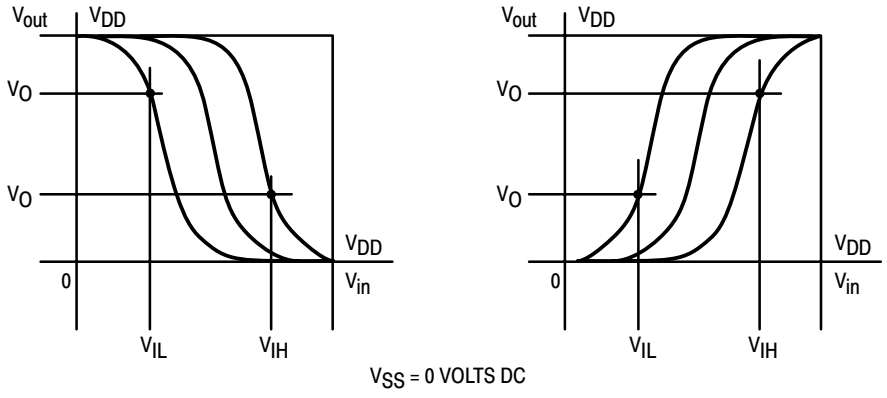

(a) Inverting Function **(b) Non−Inverting Function**

Figure 11. DC Noise Immunity

ORDERING & SHIPPING INFORMATION:

Device	Package	Shipping
MC14001BCP	PDIP−14	2000 Units per Box
MC14001BD	SOIC−14	2750 Units per Box
MC14001BDR2	SOIC−14	2500 Units / Tape & Reel
MC14001BDT	TSSOP−14	96 Units per Rail
MC14001BDTR2	TSSOP−14	2500 Units / Tape & Reel
MC14011BCP	PDIP−14	2000 Units per Box
MC14011BD	SOIC−14	2750 Units per Box
MC14011BDR2	SOIC−14	2500 Units / Tape & Reel
MC14011BDT	TSSOP−14	96 Units per Rail
MC14011BDTEL	TSSOP−14	2000 Units / Tape & Reel
MC14011BDTR2	TSSOP−14	2500 Units / Tape & Reel
MC14023BCP	PDIP−14	2000 Units per Box
MC14023BD	SOIC−14	2750 Units per Box
MC14023BDR2	SOIC−14	2500 Units / Tape & Reel
MC14025BCP	PDIP−14	2000 Units per Box
MC14025BD	SOIC−14	2750 Units per Box
MC14025BDR2	SOIC−14	2500 Units / Tape & Reel

ORDERING & SHIPPING INFORMATION:

Device	Package	Shipping
MC14071BCP	PDIP−14	2000 Units per Box
MC14071BD	SOIC−14	55 Units per Rail
MC14071BDR2	SOIC−14	2500 Units / Tape & Reel
MC14071BDT	TSSOP−14	96 Units per Rail
MC14071BDTR2	TSSOP−14	2500 Units / Tape & Reel
MC14073BCP	PDIP−14	2000 Units per Box
MC14073BD	SOIC−14	55 Units per Rail
MC14073BDR2	SOIC−14	2500 Units / Tape & Reel
MC14081BCP	PDIP−14	2000 Units per Box
MC14081BD	SOIC−14	55 Units per Rail
MC14081BDR2	SOIC−14	2500 Units / Tape & Reel
MC14081BDT	TSSOP−14	96 Units per Rail
MC14081BDTR2	TSSOP−14	2500 Units / Tape & Reel
MC14082BCP	PDIP−14	2000 Units per Box
MC14082BD	SOIC−14	55 Units per Rail
MC14082BDR2	SOIC−14	2500 Units / Tape & Reel

For ordering information on the EIAJ version of the SOIC packages, please contact your local ON Semiconductor representative.