

TO DO:
- PLEASE CHECK THE POWER ON FPGA


SDRAM

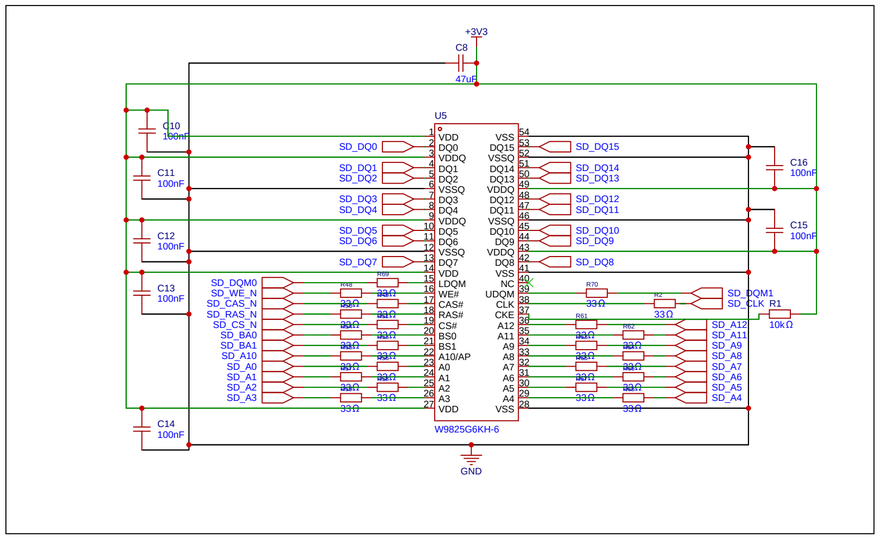


micro-sd card

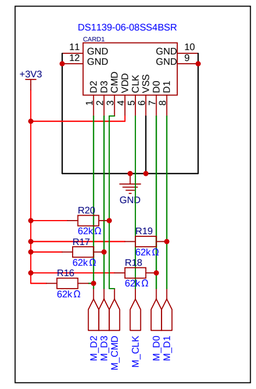


OV5640

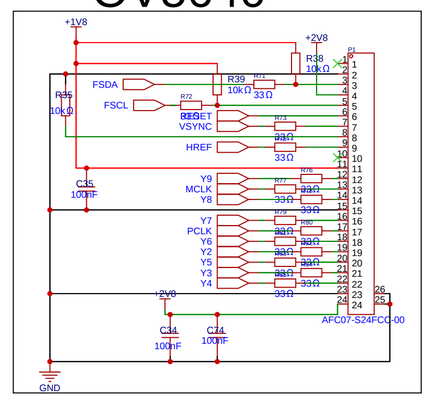


JTAG Header




24MHz Crystal




RESET




5v -> 2v8

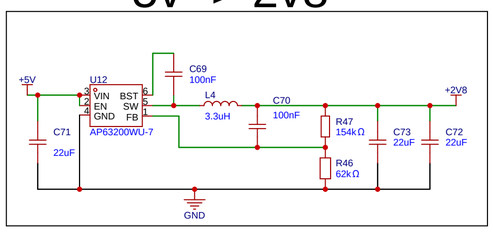


USB-C PROGRAM

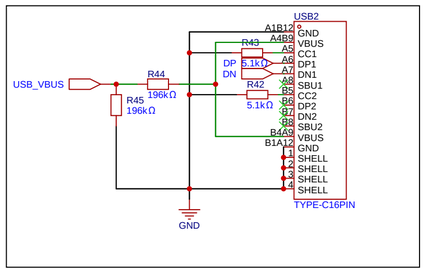


5v -> 2v5

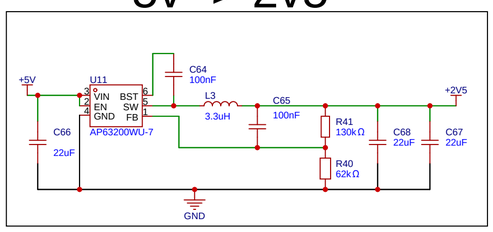


ESP32

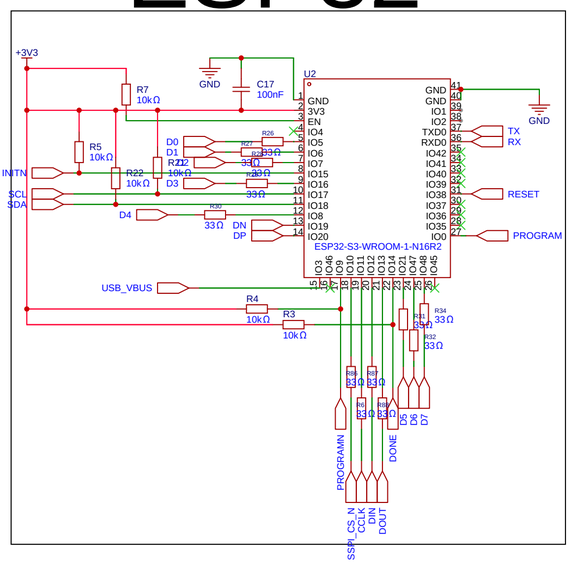


USB-C PWR




5v -> 3v3

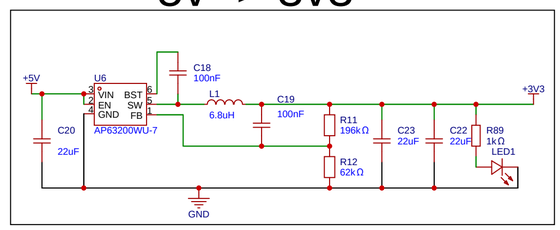

5v -> 1v8




5v -> 1v1

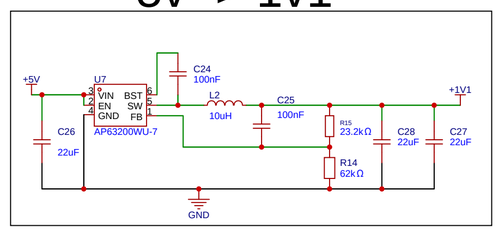

Schematic	Schematic1	Create at	2025-08-22
		Update at	2026-03-18
Board	Board1	Page	P1
Drawn		Ai-Camera	
Reviewed			
	Version	Size	Page 1 Total 2
EasyEDA	V1.0	A4	EasyEDA.com

FPGA

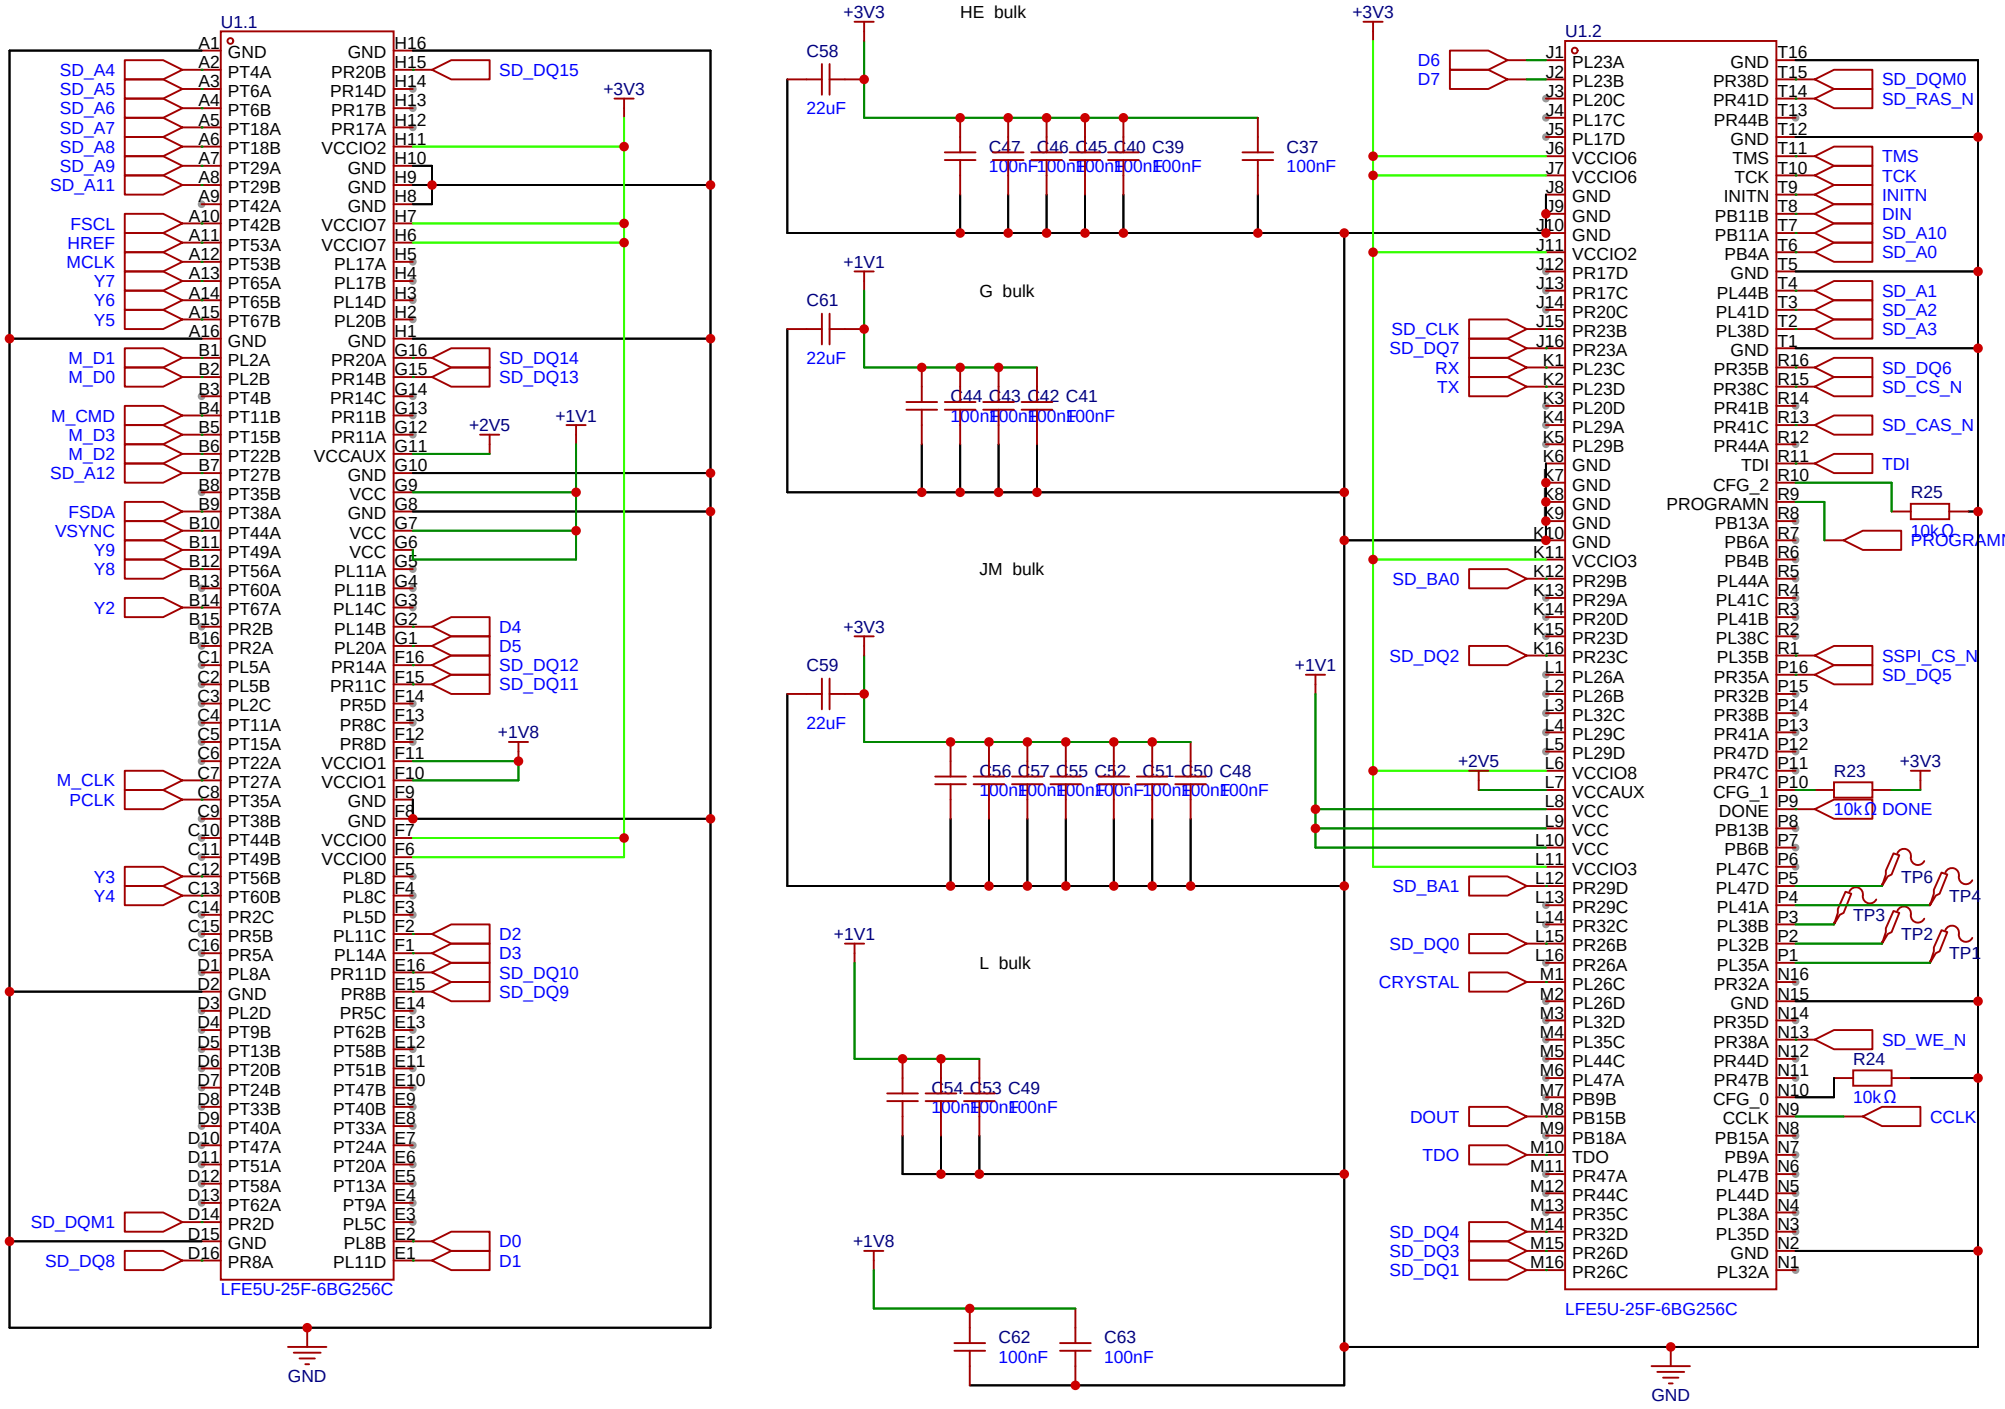

Schematic	Schematic1	Create at	2026-01-28
		Update at	2026-10-24
Board	Board1	Page	FPGA
Drawn		Ai-Camera	
Reviewed			
		Version	Size	Page 2 Total 2
EasyEDA		V1.0	A4	EasyEDA.com