

ENCLOSED CABIN LAYOUT



EmiratesBoats
قوارب الامارات
EmiratesBoats



INTERIOR
DESIGN

TECHNICAL SPECIFICATION

DIVE CATAMARAN WITH ENCLOSED CABIN

- ❑ BOAT MODEL: EB CATAMARAN 80'
- ❑ LOA: 24 METERS
- ❑ BEAM: 6.6 METERS
- ❑ LWL: 20 METERS
- ❑ DRAFT: 1.1 METERS
- ❑ DRY WEIGHT: 29000 KG
- ❑ FULL DISPLACEMENT: 47400 KG
- ❑ PASSENGERS: 8 PASSENGERS + 4 CREWS



CABIN INTERIOR

LAYOUT

- ❑ 1X DASHBOARD ELEMENT PROVISION OF CURTAINS SEPARATION X NIGHT DRIVING
- ❑ 1X DRIVER SEATING PROVIDED WITH COMPLETE DECORATIVE UPHOLSTERY CUSHIONS
- ❑ 2 X SIDE STORAGE LOOSE FURNITURE
- ❑ 1 X CENTRAL TV CABINET ELEMENT PROVIDED WITH REFRIGERATOR STORAGE COMPARTMENT
- ❑ 2 X MAJILIS SEATING ARRANGEMENT CONVERTIBLE TO 8 INDIPENDENT SINGLE BED SPACE
- ❑ 2 X FOLDABLE DINING TABLE
- ❑ 2 X FULLY SERVICE TOILET AMBIENT INCLUDED OF WASH BASIN, WC & ENCLOSED SHOWER
- ❑ 1 X PANORAMIC SLIDING SUNROOF
- ❑ 1 X EMERGENCY ESCAPE LADDER
- ❑ 6 X STORAGE COMPARTMENT FOR ACCOMMODATE PERSONAL GUEST BELONGS

EXTERIOR COCKPIT LAYOUT

- ❑ 1X WORKSTATION WITH 2 LIFE BAIT UNIT
- ❑ 1X REFRIGERATOR UNDER DECK FLOOR & 1 FOR REFRIGERATOR UNDER WORKSTATION
- ❑ 1X DIVING STATION WITH DIVE TANK STORAGE & DIVE GUN POPUP RACK STORAGE SYSTEM
- ❑ 1X 2 SEATING BENCH ARRANGEMENT CAPABLE OF ACCOMMODATE 8 PASSENGERS IN FULL COMFORT
- ❑ 3 X FISH TANK STORAGE
- ❑ 3 X DRY STORAGE COMPARTMENT
- ❑ 1 X RETRACTABLE SUNDECK TEXT EXTENSION

PROPULSION SYSTEM

- ❑ 2X MTU 16V2000M96L @ 1920 Hp EACH
- ❑ 2X SURFACE DRIVE TOP SYSTEM WITH EASY TRIM MANAGEMENT SYSTEM

TOP SPEED

❑ 50 + KNOTS

CRUISING SPEED

❑ 38 KNOTS

RANGE

❑ 740 KNOTICAL MILES @ FULL THROTTLE

- 
- ❑ FUEL TANK CAPACITY: 4 X 3100 LITERS – TOTAL 12400 LITERS
 - ❑ FRESH WATER TANK CAPACITY: 2 X 3000 – TOTAL 6000 LITERS
 - ❑ GREY WATER TANK CAPACITY: 1 X 900 – TOTAL 900 LITERS
 - ❑ BLACK WATER TANK CAPACITY: 1 X 600 – TOTAL 600 LITERS

 - ❑ FISH TANK COMPARTMENT CAPACITY: 2 X 1900 LITERS + 1 X 1100 LITERS TOTAL 4900 LITERS
 - ❑ LIVE BAIT UNIT CAPACITY: 2X650 LITERS TOTAL 1300 LITERS
 - ❑ REFRIGERATOR CAPACITY : 1 X 1100 LITERS + 1 X 600 LITERS TOTAL 1700 LITERS
 - ❑ DIVE GEAR STORAGE CAPACITY: UP TO 40 DIVING TANKS

ELECTRIAL SYSTEM

- ❑ 2X SHORE POWER SOSCKET
- ❑ 2 X GENSET 25 KW EACH 220 VOLT 50 HZ
- ❑ 24 VOLT LITIUM BATTERY
- ❑ MASTERVOLT BATTERY CHARGER SYSTEM
- ❑ MASTERVOLT C-ZONE MANAGEMENT SYSTEM

BLACK WATER SYSTEM

- ❑ 2X FLUSH MACERATOR MARINE TOILET SYSTEM
- ❑ SEWAGE TRATMENT PLANT UP TO 2000 LITERS A DAY

MOORING SYSTEM

- ❑ ANCHOR WINDLASS SYSTEM PROVIDED WITH SS316 CHAIN AND ANCHOR
- ❑ 2 X HYDRAULIC STERN CAPSTAN
- ❑ 2 X BOW JET THRUSTER UNIT
- ❑ 2 X STERN JET THRUSTER UNIT
- ❑ 2X SS316 RECESSED HEAVY DUTY BOLLARDS
- ❑ 2 X AFR SS316 FAIRLED
- ❑ 2 X HIGH CAPIENCY FENDER STORAGE
- ❑ 8X REMOVABLE FENDER HOOK HOLDERS MADE IN HEAVY DUTY SS316

NAVIGATION EQUIPMENT

- ❑ 3 X GARMIN 21" TOUCH SCREEN DISPLAY
- ❑ GPS UNIT
- ❑ 1 X OPEN RANGE RADAR MODEL
- ❑ 1 X SATELLITE DOME FOR TELECOMUNICATION
- ❑ 1 X SATELLITE TELEPHONE SYSTEM
- ❑ 1 X SATELLITE DOME FOR TV SATELLITE SYSTEM
- ❑ 2 X VHF RADIO WITH ANTENNA
- ❑ ECO SUNDER WITH FISHFINDER
- ❑ AIR COMPRESSED HORN MULTY TONALITY
- ❑ NIGHT VISION FLY CAMERA SYSTEM
- ❑ MANOVERTING SUPPORTING CAMERA SYSTEM ON AFT

ENTERTAINMENT SYSTEM

- ❑ 1 XV 65" LED 3D TELEVISION
- ❑ 1X SATELLITE DECODER
- ❑ 1X CENTRALIZED SYSTEM FOR VIDEO, MUSIC AND DATA STORAGE
- ❑ 1X CENTRALIZED SOUND SYSTEM PROVIDED WITH EXTERIOR & INTERIOR SPEAKERS
- ❑ SET AMPLIFIER FOR SOUND SYSTEM

BILGE PUMP SYSTEM

- ❑ 8 X AUTOMATIC RULE PUMP PROVIDED WITH FLOATING SWITCHES
- ❑ 8 X MANUAL RULE PUMP CONNECTED TO EMERGENCY BILGE PUMP PUNEL DISPLAY ON DASHBOARD

LIGHTING SYSTEM



- ❑ FULL LED LIGHTING SYSTEM WITH RGB MODALITY (MULTICOLOR TYPE)
- ❑ RETRO ILLUMINATED SS316 L NAME BOARD ON TRANSOM
- ❑ LED NAVIGATION LIGHT SYSTEM

FIRE FIGHTING SYSTEM

- ❑ AUTOMATIC FIRE SUPPRESSION SYSTEM ON EACH MACHINERY COMPARTMENT
- ❑ ALARM MONITORING SYSTEM PROVIDED WITH SENSOR IN MACHINERY, CABIN WITH DISPLAY PANEL
- ❑ PORTABLE FIRE EXTINGUISHER PROVIDED INSIDE CABIN AND ON EXTERNAL COCKPIT

CRADLE & MASS

Our technical office has realized the design for the cradle and for the polystyrene mass

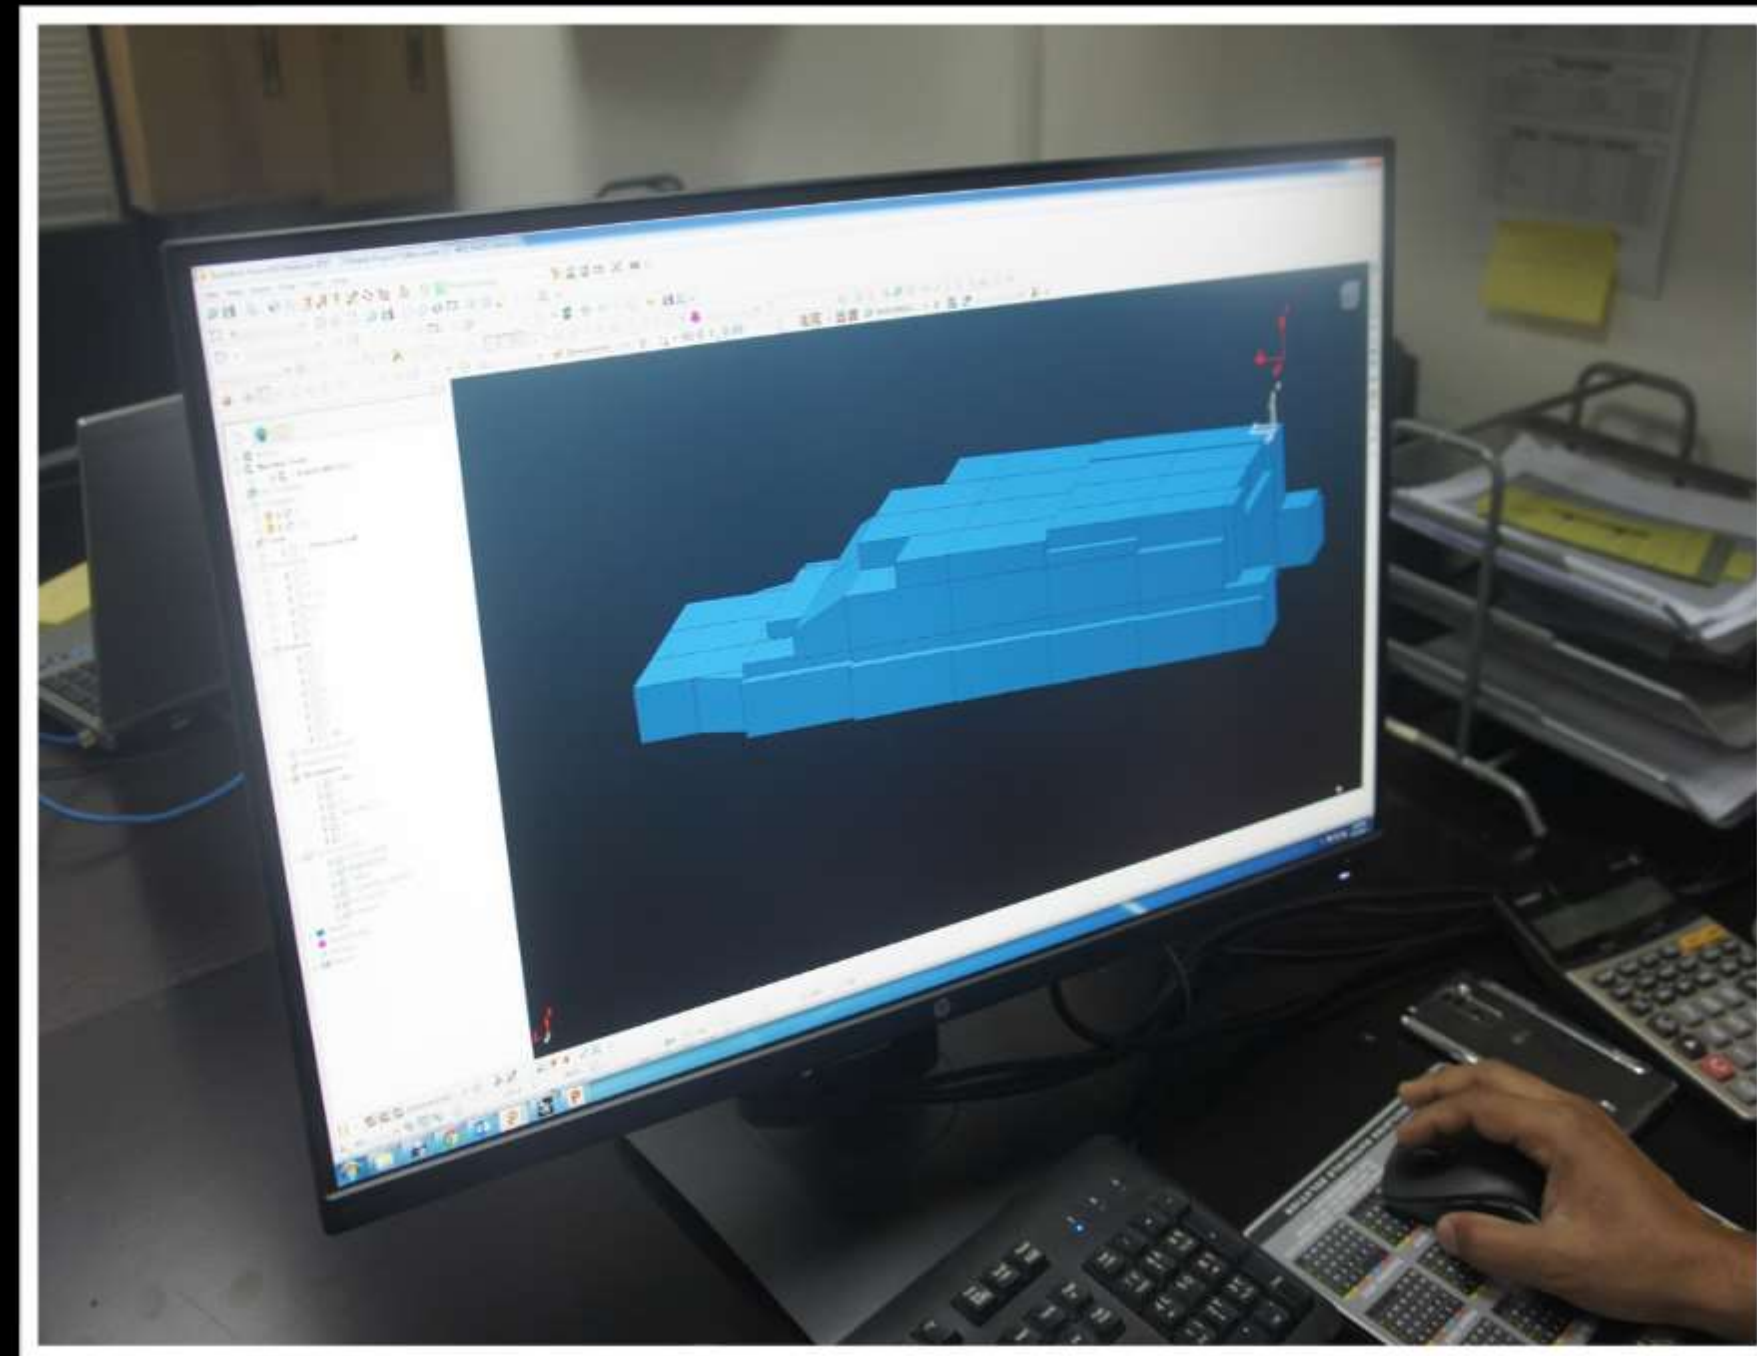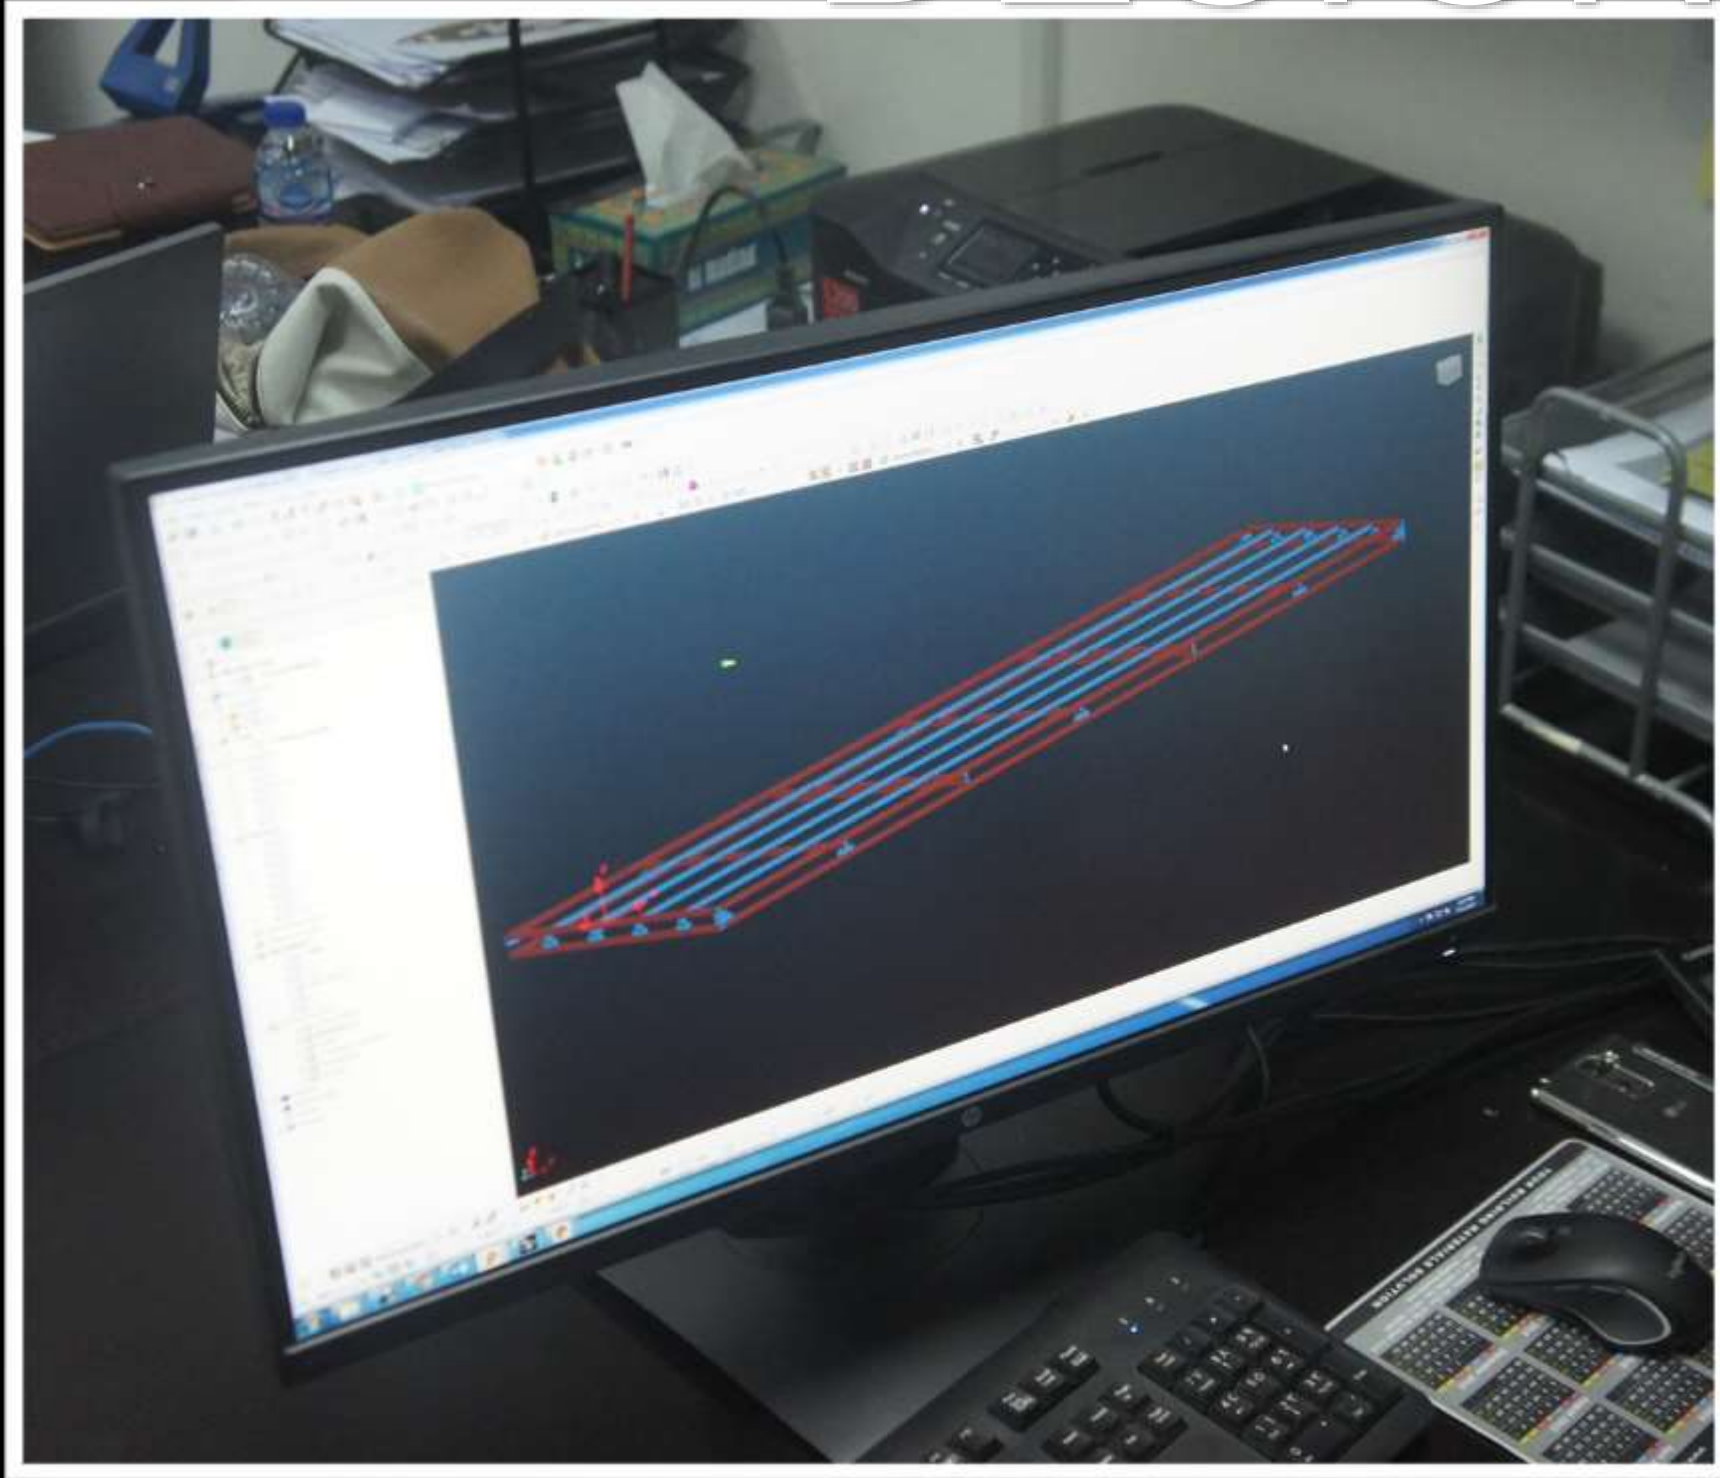

CRADLE FABRICATION

Steel cradle fabrication was built according to the design and protected with anticorrosion treatment. Subsequent a wood basement was secured to the steel structures on order to accommodate the polystyrene mass.

POLYSTYRENE MASS ASSEMBLY

Following technical drawing our
carpenter assembled the polystyrene
mass block on top of the basement.



AXIS

X 2400 mm

Y 7500 mm

Z 4200 mm

C 540

A +/- 120°

5 AXIS
PLANT MACHINE
“BELOTTI”

PRE-MACHINING & FINISHING POLYSTYRENE

This stage was executed in two different task: roughing & finishing of the polystyrene mass.

LAMINATION OF THE POLYSTYRENE BLOCKS

After the roughing and finishing,
polystyrene mass was laminated
with dedicated tooling materials .

APPLICATION OF EXTRUSION PASTE


A person wearing a white protective suit and gloves is applying a thick, grey, extruded paste to a wall. The paste is being applied from a blue flexible hose. The wall has a yellowish-brown base color, and the paste is being applied in a thick, textured layer. The background shows a white plastic sheet and a red and yellow striped object.

After complete the lamination stage, the next step was the extrusion of the milling paste compound on the plug.

The background of the slide is a photograph of an industrial manufacturing environment. A large, white, extruded component, possibly a part of a vehicle chassis, is the central focus. A robotic arm with a gripper is positioned to the right, interacting with the part. The top left corner features a decorative graphic with horizontal bands of orange, red, and yellow, transitioning into a green and blue arc at the top right.

& FINISHING OF EXTRUSION PASTE

Once the milling extruded compound
its been cured, was started the
pre-machining stage.

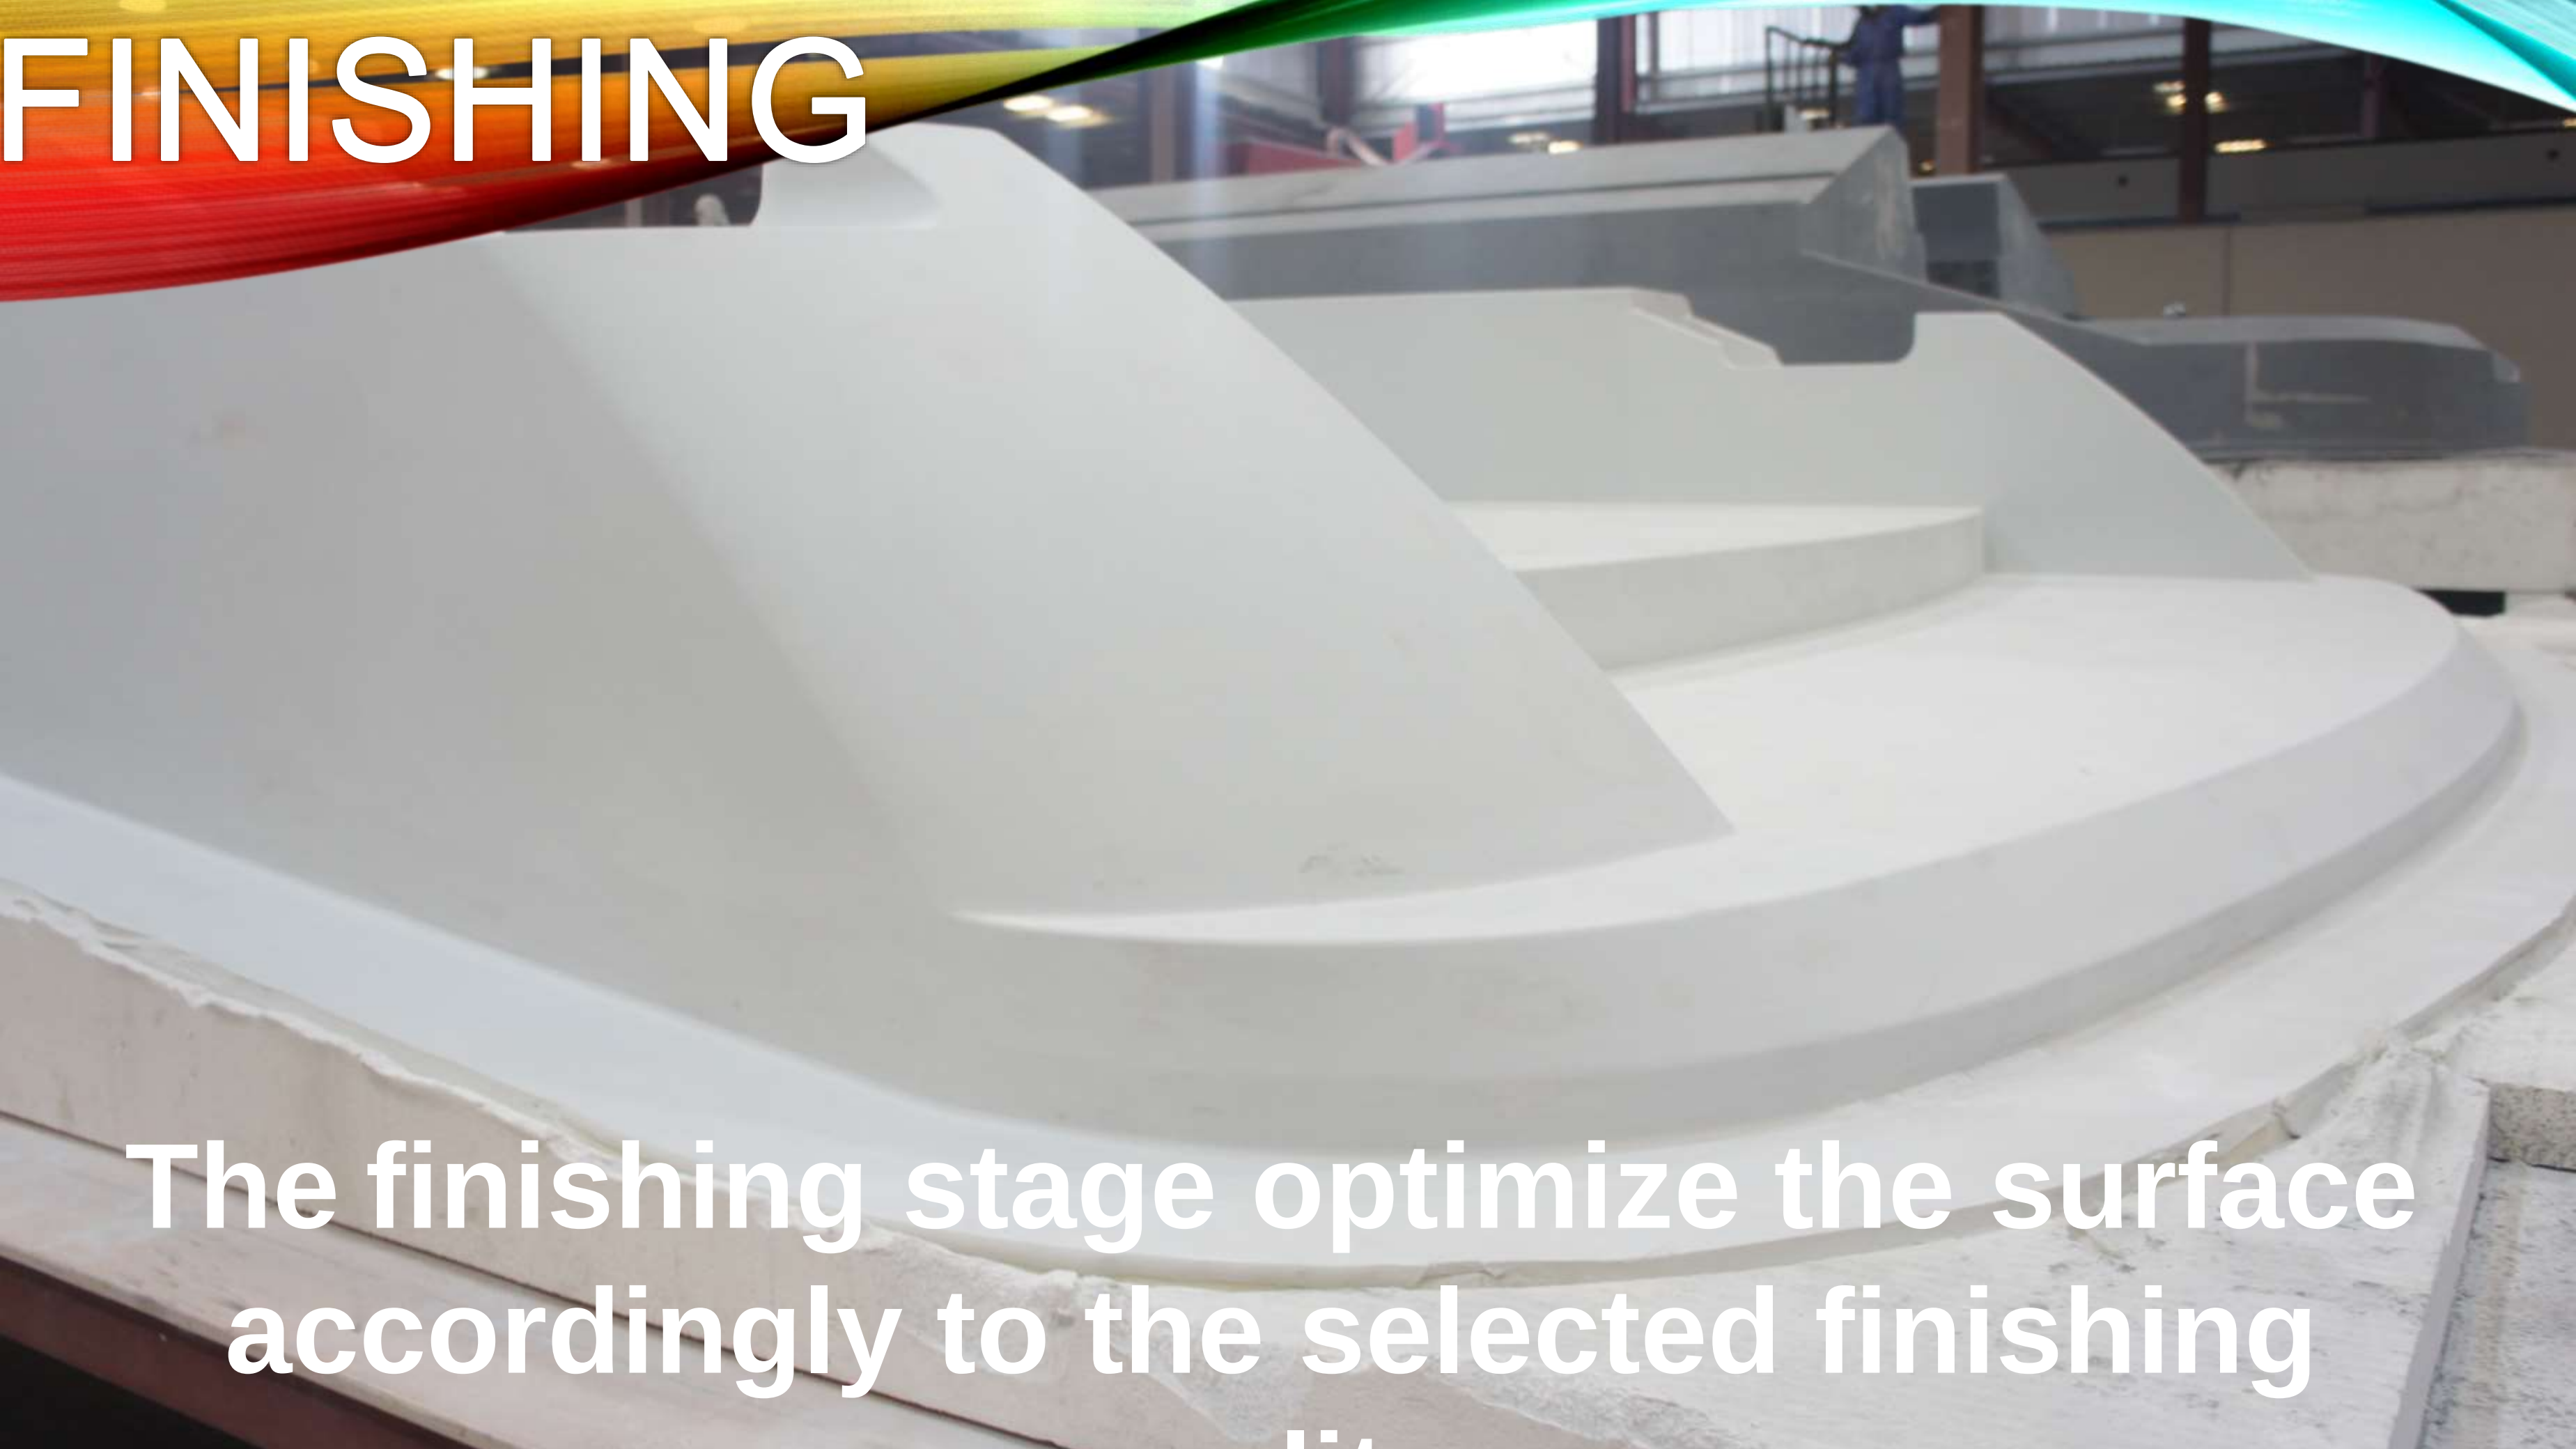

FINISHING

The finishing stage optimize the surface accordingly to the selected finishing

BASE COAT PRIMER

Once plug machine operation are been successfully completed, the cradle was moved to our finishing section where will commence the final stage of preparation of the plug.

First steep was be the light sanding of the entire milled surface on order to prepare the surface to receive the prime coat filler compound. The same was be faired till obtaining a smooth surface accordingly to the client requirement.



HIGH GLOSS APPLICATION



SANDING HIGH



POLISHING HIGH

SPRAY GELCOAT





FIRST LAYER LAMINATION

BALSA



LAMINATION



FRAME FABRICATION





LAMINATION FRAME

DECK





DECK



DECK



HULL



HUL

HUL L





HUL

BACK DOOR







CABIN

PREPARATION FOR INFUSION



PREPARATION FOR INFUSION

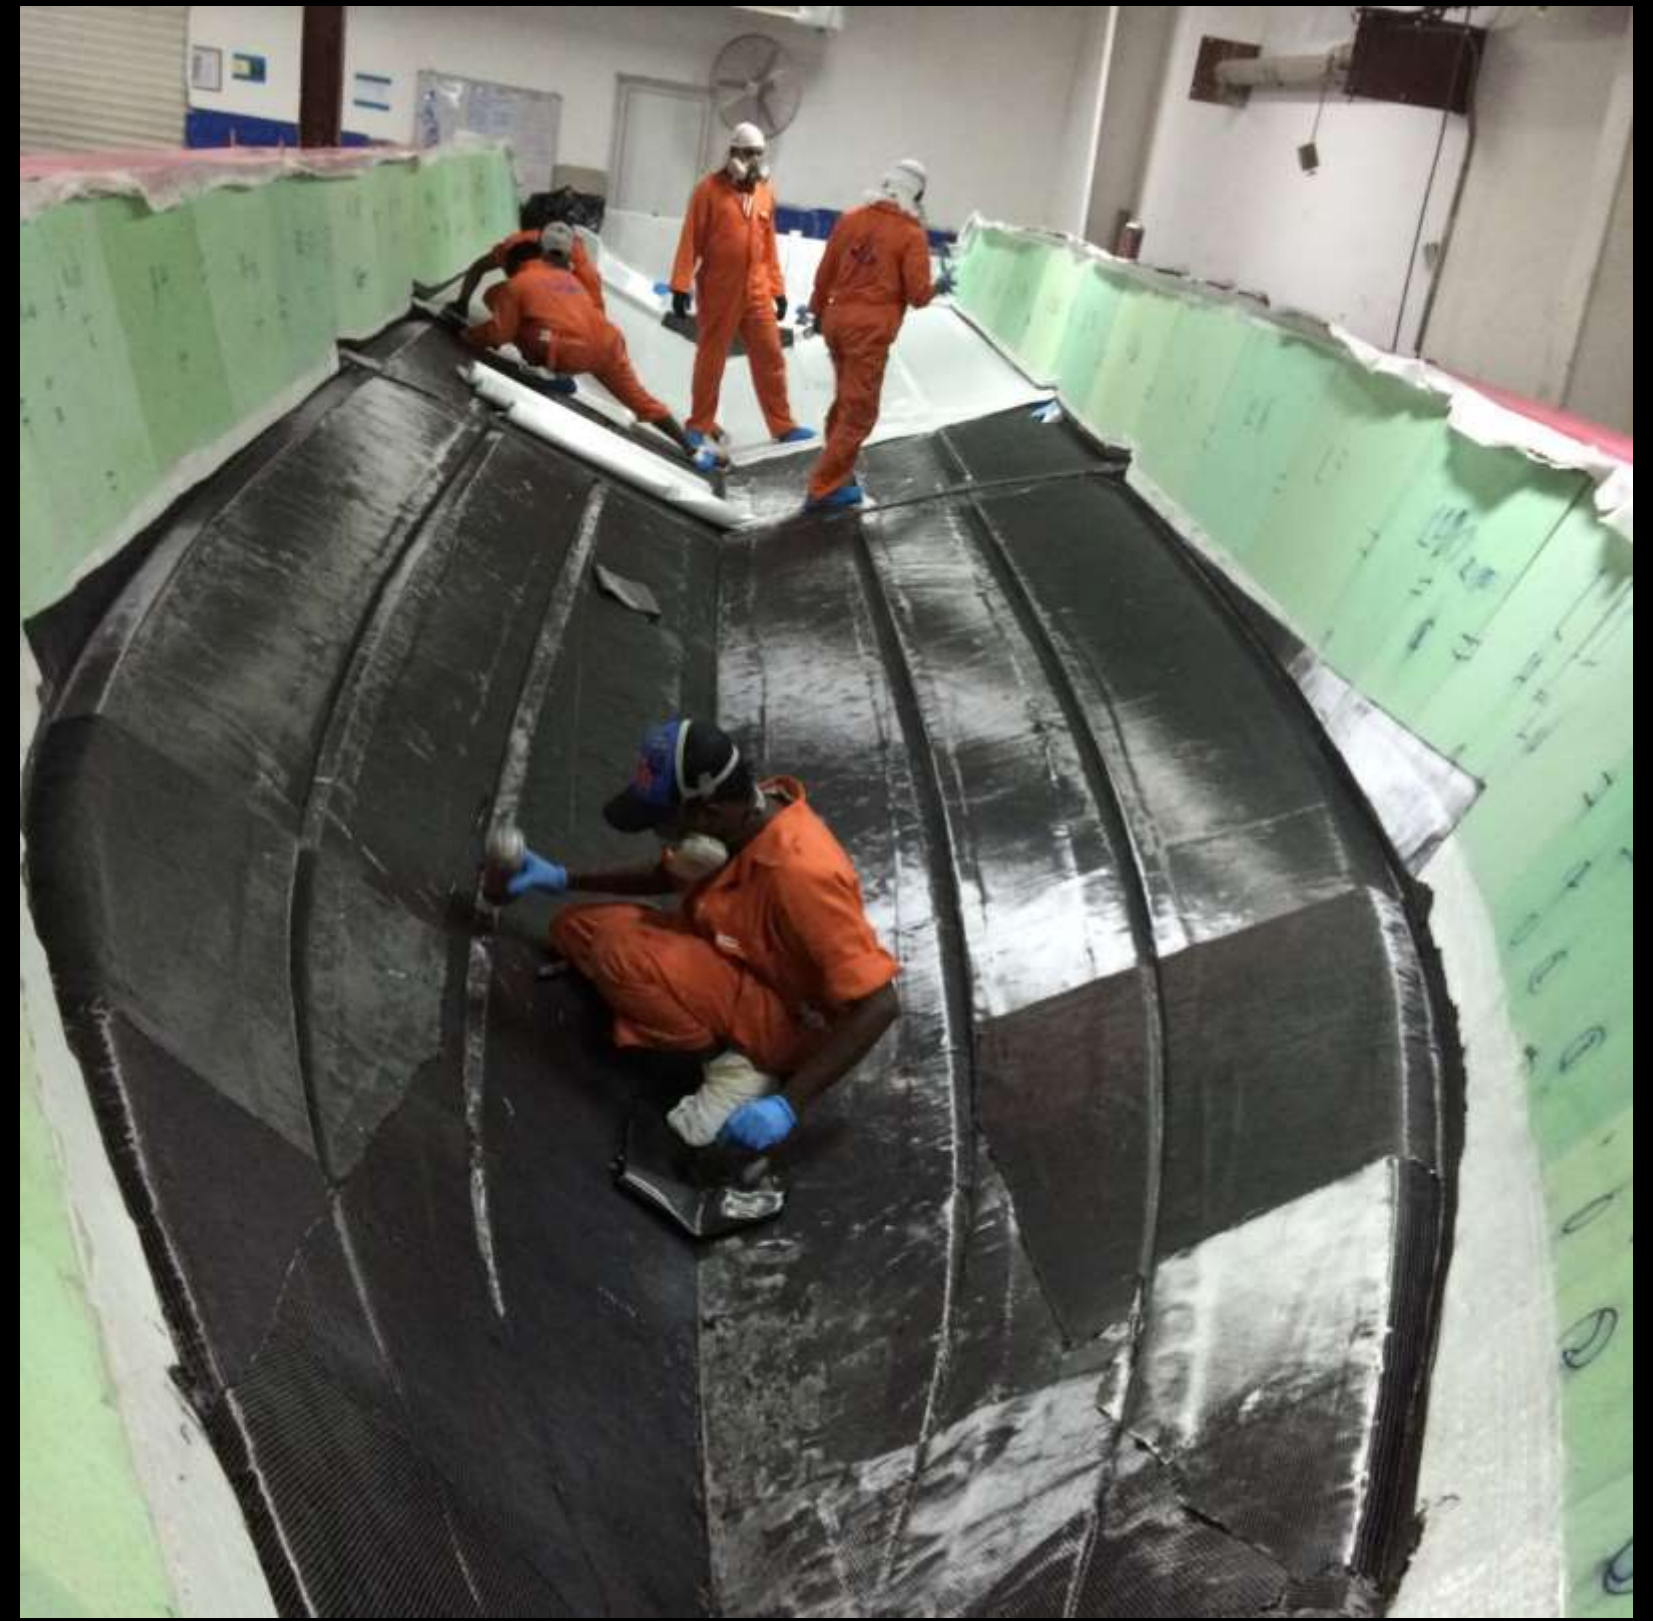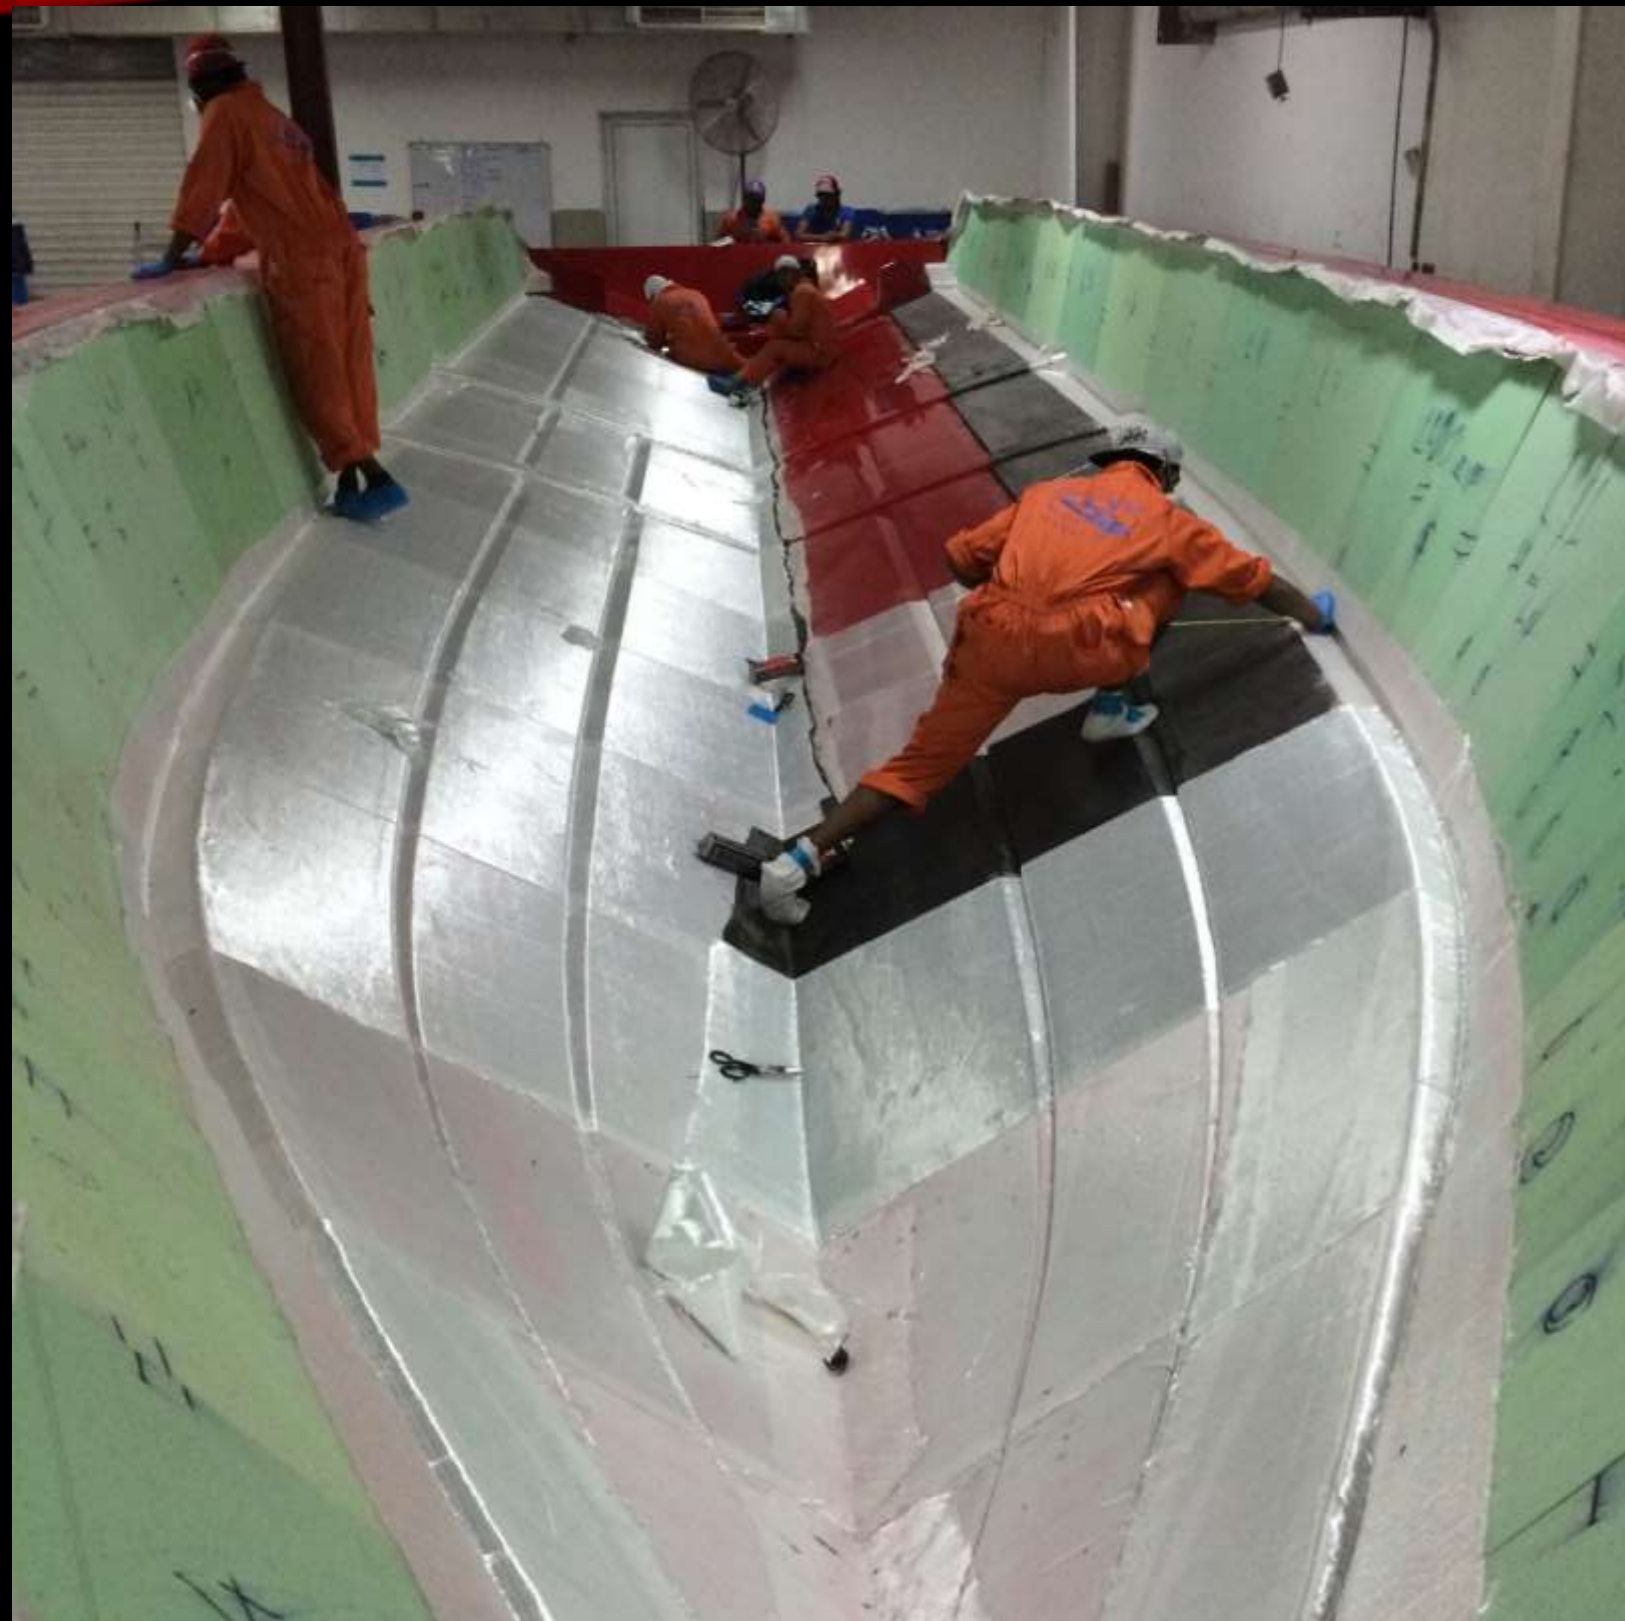

INFUSION

