Assure HP55

High temperature R290 monobloc air source heat pump

A self-contained high temperature ASHP that's also high in performance and efficiency. Contains sustainable R290 refrigerant and operates at a quiet volume.



- **Up to 75°C Flow Temperature**
- **A+++ ErP at 55°C**
- **Exceptionally Quiet**
- **Dynamic Tariff Ready**
- **Easy Fitting & Commissioning**

Features	Benefit				
Full range	Available in 4, 6, 8, 11 & 13kW outputs (including 3-phase options on 11 & 13kW models) to suit a wide range of property sizes and applications.				
P-Rating (kW) @ 55°C	HP55-4	HP55-6	HP55-8	HP55-11	HP55-13
	4.9	6.1	7.8	12.1	13.7
A+++ efficiency at 55°C	A+++ ErP rated at both 35°C and 55°C on the 4, 6 & 8kW models. The 11 & 13kW models achieve A+++ at 35°C and A++ at 55°C — strong efficiency even at higher heating temperatures.				
Exceptionally quiet	Sound power levels of just 48–52 dB(A) across the range, helping minimise disturbance to homeowners and neighbours.				
Dynamic tariff ready	When paired with Baxi AmbiZen Thermostat and a dynamic tariff, PriceSense schedules hot-water heating during lower-cost electricity periods — helping customers reduce running costs.				
Full 65°C Ecodesign data	Full high-temperature 65°C Ecodesign data supports accurate DEAP assessment, particularly valuable when assessing retrofit and radiator-led applications.				
Installer-friendly bundle	Magnetic filter and Y-strainer included, minimal outdoor-unit wiring and guided commissioning through Baxi START App** help simplify installation, commissioning and system setup.				
Dual-temperature zone control	Built-in control for two heating circuits at different flow temperatures — supporting systems with a mix of underfloor heating and radiators, or extensions with different heating requirements.				

#5 Years Warranty consists of 2 Years as standard + 3 Additional Years T&Cs Apply

**Baxi START App functionality requires either an Baxi AmbiZen Thermostat or a Baxi ASHP Pre-plumbed Cylinder.


† The Baxi Assure HP55 must be installed with either a Baxi ASHP Control or a Baxi ASHP Pre-plumbed Cylinder. Both are sold separately.

What's in the box?


ASHP HP55 includes:





Warranty (T&Cs apply)

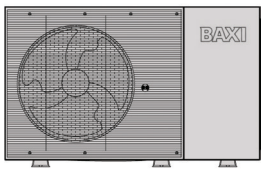


HP55 Outdoor Unit


Y-Strainer



Magnetic Filter



Condensate Drain Connector


ASHP Wall Controller Includes:†




ASHP Controller


DHW Sensor & 5m Cable



Outdoor Weather Sensor


10 x Cable Glands


Temperature Sensors & Clamps

Dimensions

Units	4 & 6 kW models	8, 11 & 13 kW models
A Height (mm)	725	872
B Depth (mm)	426	523
C Width (mm)	1,301	1,390

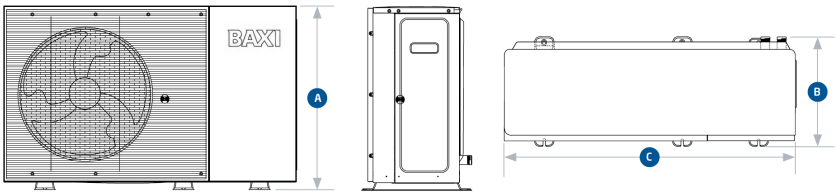


Siting & R290 Safety Requirements


Siting the outdoor unit in front of an external wall

R290 Protective Perimeter


- No doors, windows, vents, wastewater access points, electrical sockets, switches, lights or other ignition sources within the protective perimeter. Seal all service penetrations and prevent refrigerant entering the building or wastewater system.
- Under window siting: Permitted where the window opening remains outside the defined protective perimeter.
- Coastal installations: minimum 500 m from the sea and no direct exposure to sea breezes.
- Refer to the Installation Manual for full siting and clearance requirements.


Siting the outdoor unit in front of an external wall

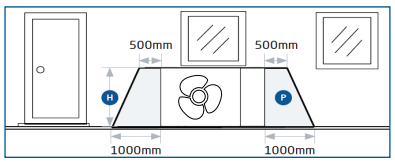

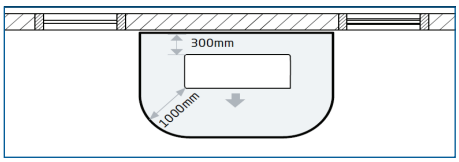

Installing the outdoor unit in a corner

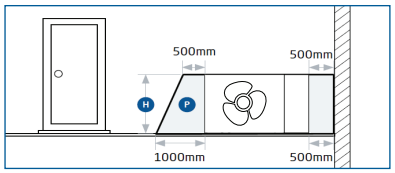

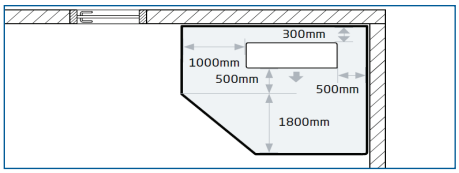

The Baxi Assure HP55 ASHP can be paired with:


Baxi ASHP Pre-plumbed Cylinder


Baxi ASHP Control & Baxi ASHP Cylinder


Baxi ASHP Control & 3rd Party Cylinder

For more information please scan the QR.

BDR Thermea Ireland Limited trading as Baxi. Registered in Ireland as a private company limited by shares under company number 26092. Registered office at Unit F 5&6, Calmount Park, Calmount Road, Ballymount, Dublin 12, Ireland. VAT registered number: IE 9Y33766S Directors: Jason Baldock (UK), Chris Robottom (UK)

Information is correct as at time of publication.

Heatmerchants Baxi Assure HP55 High Temperature R290 Monobloc ASHP data sheet - August 2026.

For more information:
01 4590870
sales@baxi.ie
baxi.ie