Panasonic



AQUAREA MONO BLOC J GENERATION PROVIDES BOTH DOMESTIC HOT WATER AND HEAT FOR RADIATORS AND UNDERFLOOR HEATING FROM ONE COMPACT OUTDOOR UNIT.

Adapts to your home

The Aquarea High Performance monobloc range is extremely flexible. Selecting from a range of capacities, from 5kW to 9kW, you can find lower initial investment and lower operational cost options. If you have a well insulated home, why install oversized equipment that will cost more and will have higher running costs?
The range fully adapts the system to the needs of your home, whether it is a new build or a refurbishment, as it is able to reach up to 60°C water outlet.

Heat Pump, 80% of energy for free


Based on Air to Water heat pump technology, Aquarea is highly efficient and environmentally friendly. It captures heat energy from the ambient air and transfers it to heat the water needed to warm your home, for domestic hot water and even to cool the house if wished. In this way, up to 80% of the heat energy required is taken from the ambient air - even in extremely low temperatures.

More comfort

The Aquarea Heat Pump is able to precisely control the temperature thanks to reliable Panasonic Inverter Compressors. Even in adverse weather conditions (-20°C), Aquarea warms your home effectively and efficiently. Aquarea can also cool space in summer and bring hot water all year round, offering different modes to give the ultimate comfort.

Space-saving solution

Aquarea High Performance Monobloc is the ideal space-saving solution for any home as the unit does not require a separate hydrokit inside. Additionally, thanks to the unit's neat design, all refrigerant is sealed in the compact outdoor unit, leaving only water pipes needed inside the property. For further space-saving ideas, combine Aquarea Monobloc with a Combo tank, which incorporates the DHW with a buffer tank.

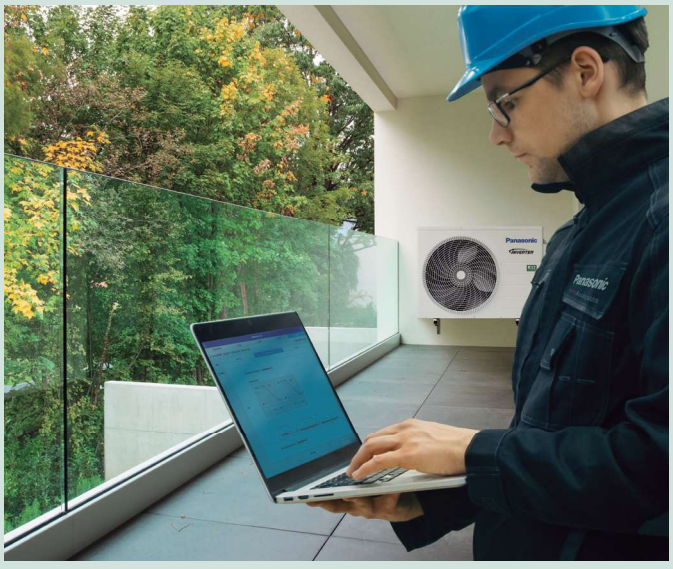


Why Panasonic?


Panasonic has more than 60 years of Heat Pump experience, having produced an exceptional amount of compressors. Quality is what Panasonic stands for and this is a key factor for succeeding in the European market.
As a member of the European Heat Pump Association, the production of Aquarea in Europe and maintaining high security protocols in European servers for the Aquarea Smart Cloud, makes Panasonic a trusted heating partner.

New Aquarea High Performance Mono-bloc J Generation Single Phase. Heating and Cooling - MDC • R32 refrigerant

- Optional Smartphone control
- Maximum hydraulic module output temperature: 60 °C
- High heating and cooling capacities, even at low outdoor temperatures
- Works at temperatures as low as -20 °C
- Operation in cooling mode at outdoor temperatures as low as 10 °C
- Built-in magnet filter for easy installation

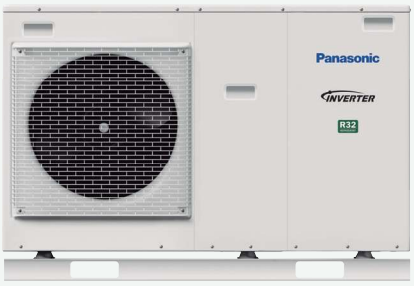







CZ-TAW1
Cloud connection. For user control and installer remote maintenance.

			Single Phase Heating and Cooling		
Outdoor unit			**WH-MDC05J3E5**	**WH-MDC07J3E5**	**WH-MDC09J3E5**
Heating capacity / COP (A +7 °C, W 35 °C)		kW / COP	5,00 / 5,08	7,00 / 4,76	9,00 / 4,48
Heating capacity / COP (A +7 °C, W 55 °C)		kW / COP	5,00 / 3,01	7,00 / 2,82	8,95 / 2,78
Heating capacity / COP (A +2 °C, W 35 °C)		kW / COP	5,00 / 3,57	7,00 / 3,40	7,45 / 3,13
Heating capacity / COP (A +2 °C, W 55 °C)		kW / COP	5,00 / 2,27	6,30 / 2,16	7,00 / 2,12
Heating capacity / COP (A -7 °C, W 35 °C)		kW / COP	5,00 / 2,78	6,80 / 2,81	7,50 / 2,63
Heating capacity / COP (A -7 °C, W 55 °C)		kW / COP	5,00 / 1,85	6,30 / 1,86	7,00 / 1,80
Cooling capacity / EER (A 35 °C, W 7 °C)		kW / EER	5,00 / 3,31	7,00 / 3,06	9,00 / 2,71
Cooling capacity / EER (A 35 °C, W 18 °C)		kW / EER	5,00 / 5,05	7,00 / 4,73	9,00 / 4,25
Seasonal energy efficiency - Heating average climate (W35 °C / W55 °C)		ηs %	202 / 142	193 / 130	193 / 130
		SCOP	5,12 / 3,63	4,90 / 3,32	4,90 / 3,32
Energy class heating average climate (W35 °C / W55 °C)		A+++ to D	A+++ / A++	A+++ / A++	A+++ / A++
Seasonal energy efficiency - Heating warm climate (W35 °C / W55 °C)		ηs %	237 / 165	227 / 160	227 / 160
		SCOP	6,00 / 4,20	5,75 / 4,07	5,75 / 4,07
Energy class heating warm climate (W35 °C / W55 °C)		A+++ to D	A+++ / A+++	A+++ / A+++	A+++ / A+++
Seasonal energy efficiency - Heating cold climate (W35 °C / W55 °C)		ηs %	160 / 115	164 / 116	164 / 116
		SCOP	4,08 / 2,95	4,18 / 2,98	4,18 / 2,98
Energy class heating cold climate (W35 °C / W55 °C)		A+++ to D	A++ / A+	A++ / A+	A++ / A+
Sound power part load [1]	Heat	dB(A)	59	59	59
Sound power full load	Heat / Cool	dB(A)	64 / 65	68 / 67	69 / 68
Dimension	H x W x D	mm	865 x 1283 x 320	865 x 1283 x 320	865 x 1283 x 320
Net weight		kg	99	104	104
Refrigerant (R32) / CO_2 Eq. [2]		kg / T	1,3 / 0,878	1,3 / 0,878	1,3 / 0,878
Water pipe connector		Inch	R 1¼	R 1¼	R 1¼
Pump	Number of speeds		Variable Speed	Variable Speed	Variable Speed
	Input power (Min / Max)	W	34 / 96	36 / 100	39 / 108
Heating water flow (ΔT=5 K, 35 °C)		L/min	14,3	20,1	25,8
Capacity of integrated electric heater		kW	3	3	3
Input Power	Heat	kW	0,985	1,47	2,01
	Cool	kW	1,51	2,29	3,32
Running and Starting current	Heat	A	4,7	7,0	9,3
	Cool	A	7,0	10,5	14,7
Current 1		A	12	17	17
Current 2		A	13	13	13
Recommended fuse		A	30 / 15	30 / 15	30 / 16
Recommended cable size, supply 1 / 2		mm²	3 x 1,5 / 3 x 1,5	3 x 2,5 / 3 x 1,5	3 x 2,5 / 3 x 1,5
Operation range (outdoor temperature)	Heat	°C	-20 ~ 35	-20 ~ 35	-20 ~ 35
	Cool	°C	10 ~ 43	10 ~ 43	10 ~ 43
Water outlet	Heat	°C	20 ~ 60	20 ~ 60	20 ~ 60
	Cool	°C	5 ~ 20	5 ~ 20	5 ~ 20

Accessories (optional)	
PAW-TD20C1E5	Tank 200L - Stainless steel
PAW-TD30C1E5	Tank 300L - Stainless steel
PAW-3WYVLV-HW	3 way valve for DHW Tanks
PAW-BTANK50L-2	Buffer tank 50L

Accessories (optional)	
CZ-TAW1	Aquarea Smart Cloud for remote control and maintenance through wireless or wired LAN
PAW-A2W-RTWIRED	Room thermostat
PAW-A2W-RTWIRELESS	Wireless LCD room thermostat
PAW-A2W-AFVLV	Anti-freeze valve.

1) Sound power in accordance to 8112013,81312013 and EN12102-1:2017 at +7 °C. 2) WH-MDC models are hermetically sealed.
EER and COP calculation is based in accordance to EN14511. * Available in May 2020.

AQUAREA

Aquarea High Performance: Energy saving

Aquarea High Performance delivers outstanding efficiency in heating and domestic hot water. It is easy to maintain thanks to the built-in devices such as the water filter, water flow sensor and optional connectivity to the Smart Cloud remote service. It is also able to operate as low as -20°C.

5,08
COP

-20°C
OPERATES DOWN TO EXTREME OUTDOOR TEMPERATURE

60°C
HOT WATER SUPPLY

A CLASS
WATER PUMP
AUTO SPEED

A++
ErP 55°C
Scale from A+++ to D

A+++
ErP 35°C
Scale from A+++ to D

R32

INVERTER+

DHW

WATER FILTER

FLOW SENSOR

BOILER CONNECTION

SOLAR KIT

ADVANCED CONTROL

OPTIONAL WLAN

BMS CONNECTIVITY

Refrigerant gas R32. The systems using R32 refrigerant are more environmentally friendly than other refrigerants like R22 and R410A. — Inverter compressor provides more precise temperature control and keeps the ambient temperature constant with lower energy consumption and quieter operation. — DHW. With Aquarea you can also heat your domestic hot water at a very low cost with the optional hot water cylinder. — Water filter with magnet. Easy access & fast clip technology for J Generation. — Water flow sensor Renovation.

Our Aquarea Heat Pumps can be connected to an existing or new boiler for optimum comfort even at very low outdoor temperatures. — Solar kit. For even greater efficiency, our Aquarea Heat Pumps can be connected to photovoltaic solar panels with an optional kit. — Advanced control. Remote controller with full dotted 3,5'' wide back light screen. Menu with 17 available languages easy to use for installer and user. Included on J Generation. — Internet control (Optional). A next generation system providing a user-friendly remote controller of air conditioning or Heat Pump units from everywhere, using a simple Android or iOS smartphone, tablet or PC via internet. — Connectivity. The communication port can be integrated into the indoor unit and provides easy connection to, and control of, your Panasonic Heat Pump to your home or building management system.

Due to the ongoing innovation of our products, the specifications of this catalogue are valid barring typographic errors, and may be subject to minor modifications by the manufacturer without prior warning in order to improve the product. The total or partial reproduction of this catalogue is prohibited without the express authorisation of Panasonic Marketing Europe GmbH.

Panasonic

SG Ready: Thanks to Aquarea HPM, Aquarea range (Bi-bloc and Mono-bloc) is holding the SG Ready Label (Smart Grid Ready Label), given by Bundesverband Wärmepumpe (German Heat Pump Association). This Label shows the real capacity of Aquarea to be connected in an intelligent grid control. MCS Certificate number: MCS HP0086.*

APPROVED PRODUCT

To find out how Panasonic cares for you, log on to www.aircon.panasonic.eu/IE_en/

+353 (0)1 4195313
+353 (0) 876005031

Heating & Cooling Solutions
Panasonic Ireland. A branch of Panasonic Marketing Europe GmbH Unit 1, The Courtyard,
Kilcarbery Business Park
Nangor Road, Dublin 22

heating & cooling solutions

EU-LFLTA2WM0520/01