




SATELLITE COMPONENTS

www.xovian.co.in

SPACE QUALITY MAGNETIC TORQUER ROD (MTR) FOR LOW EARTH ORBIT (LEO) 15Am²

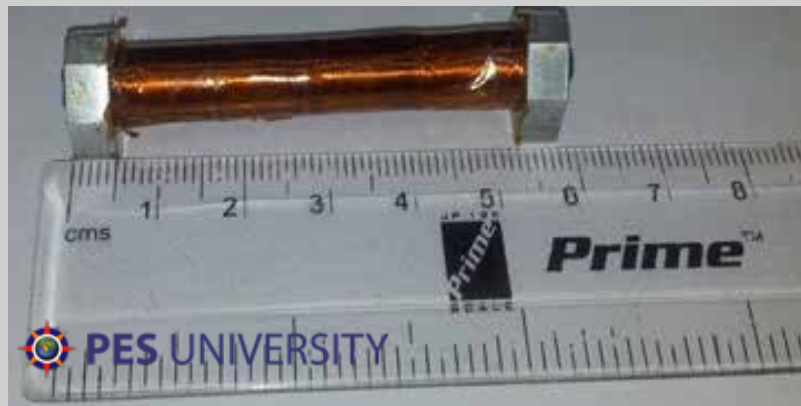

MTR are regularly used in Communication Satellites and Remote Sensing Satellites. They are predominantly used for momentum dumping i.e. de-saturation of momentum wheels and reaction wheels. Angular momentum and notation control of spinning momentum-biased and dual-spin spacecraft.

Specification:

<i>Parameter</i>	<i>Value</i>
Magnetic dipole moment	0.2 Am ²
Power	175 mW @ 5V
Operating Temperature	-400C to +800C
Envelope	60mm X 14mm X 14mm (L, B, H)
Mass	30 g
Mechanical I/F	4 Nos of M2.5 screws/tied to PCB
Electrical I/F	Direct soldering of coil wire or 24AWG pigtail leads to PCB
Random vibration	15 g rms
Linearity	+/- 5%