REMOTE CONTROL

Before making any connections to the SB-4106. Observe the following:

- Ensure the main voltage supply matches the label on the supplied plug-pack (+/-10%).
- Ensure that the power switch is OFF.
- Ensure that all system grounds (earth) are connected to a common point.
- Avoid powering equipment within a system from multiple power sources that may be separated by large distances.
- Connect all audio video sources and destination equipment.
- Power up all source and destination audio-visual sources.
- For each destination output select the appropriate input source by using the front panel input select buttons. The supplied IR remote control. Or through the RS-232 serial communications port.
- Upon powering up the switcher, it will return to its last used setting before being powered down.


REMOTE CONTROL

1. SWITCH POWER ON or OFF:

Power ON and OFF

2. INPUTS: 1-4 VGA DEVICE SOURCES:

Input - Sources 1~4: VGA Signal source devices # 1~4

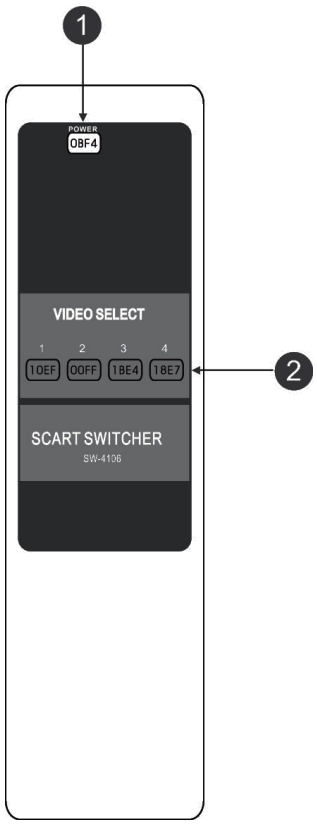

HOW TO SETUP IR CODES:

IR TYPE: uPD6121G
IR CODE: 08F7

POWER ON: 08F7 0BF4

POWER OFF: 08F7 0BF4

SOURCE#1: 08F7 10EF

SOURCE#2: 08F7 00FF

SOURCE#3: 08F7 1BE4

SOURCE#4: 08F7 18E7