
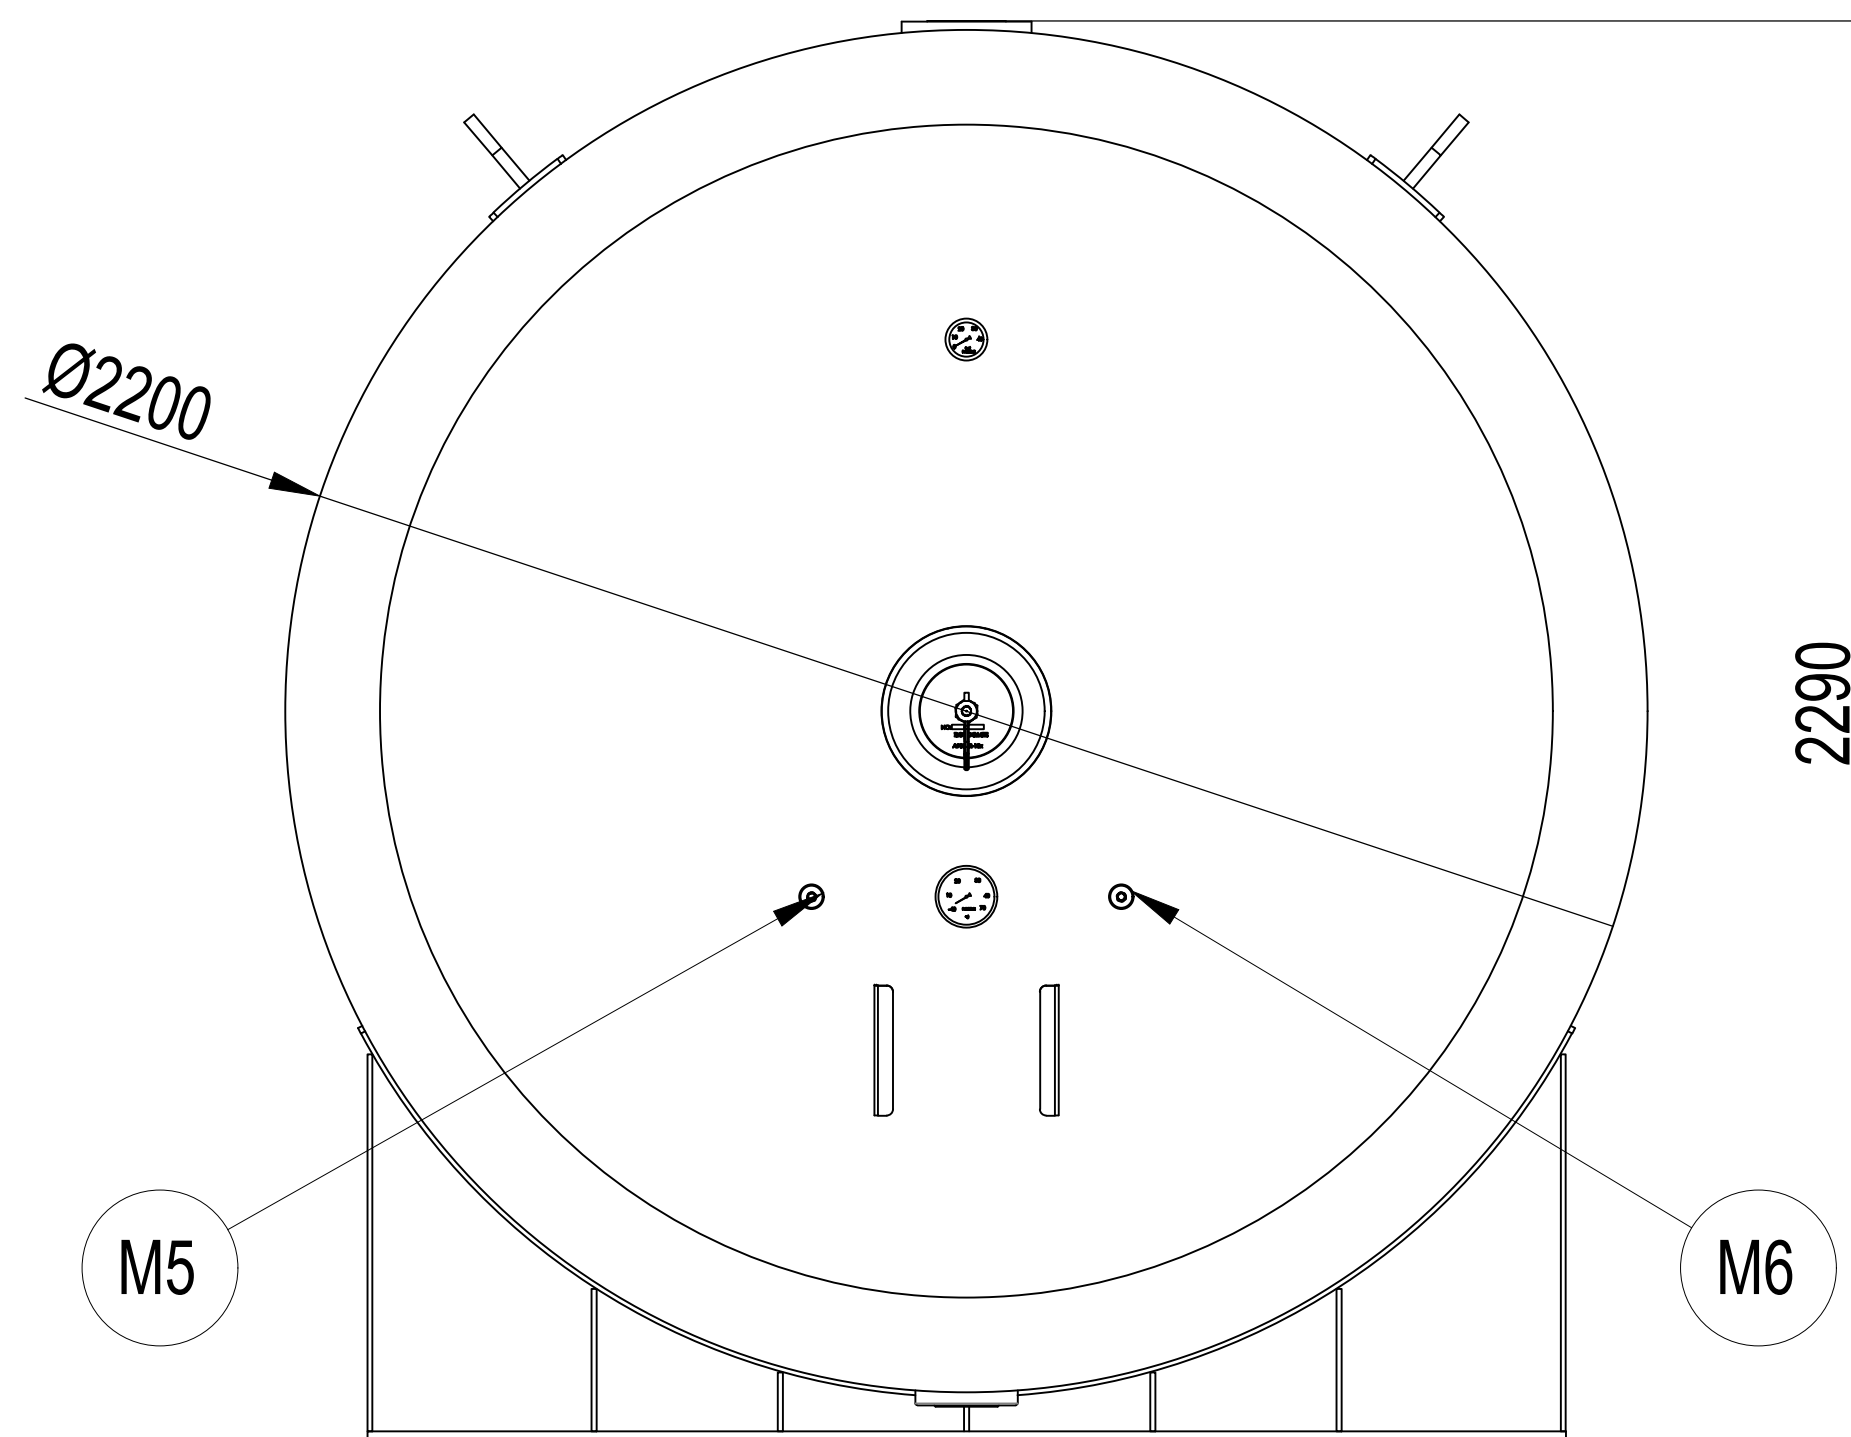
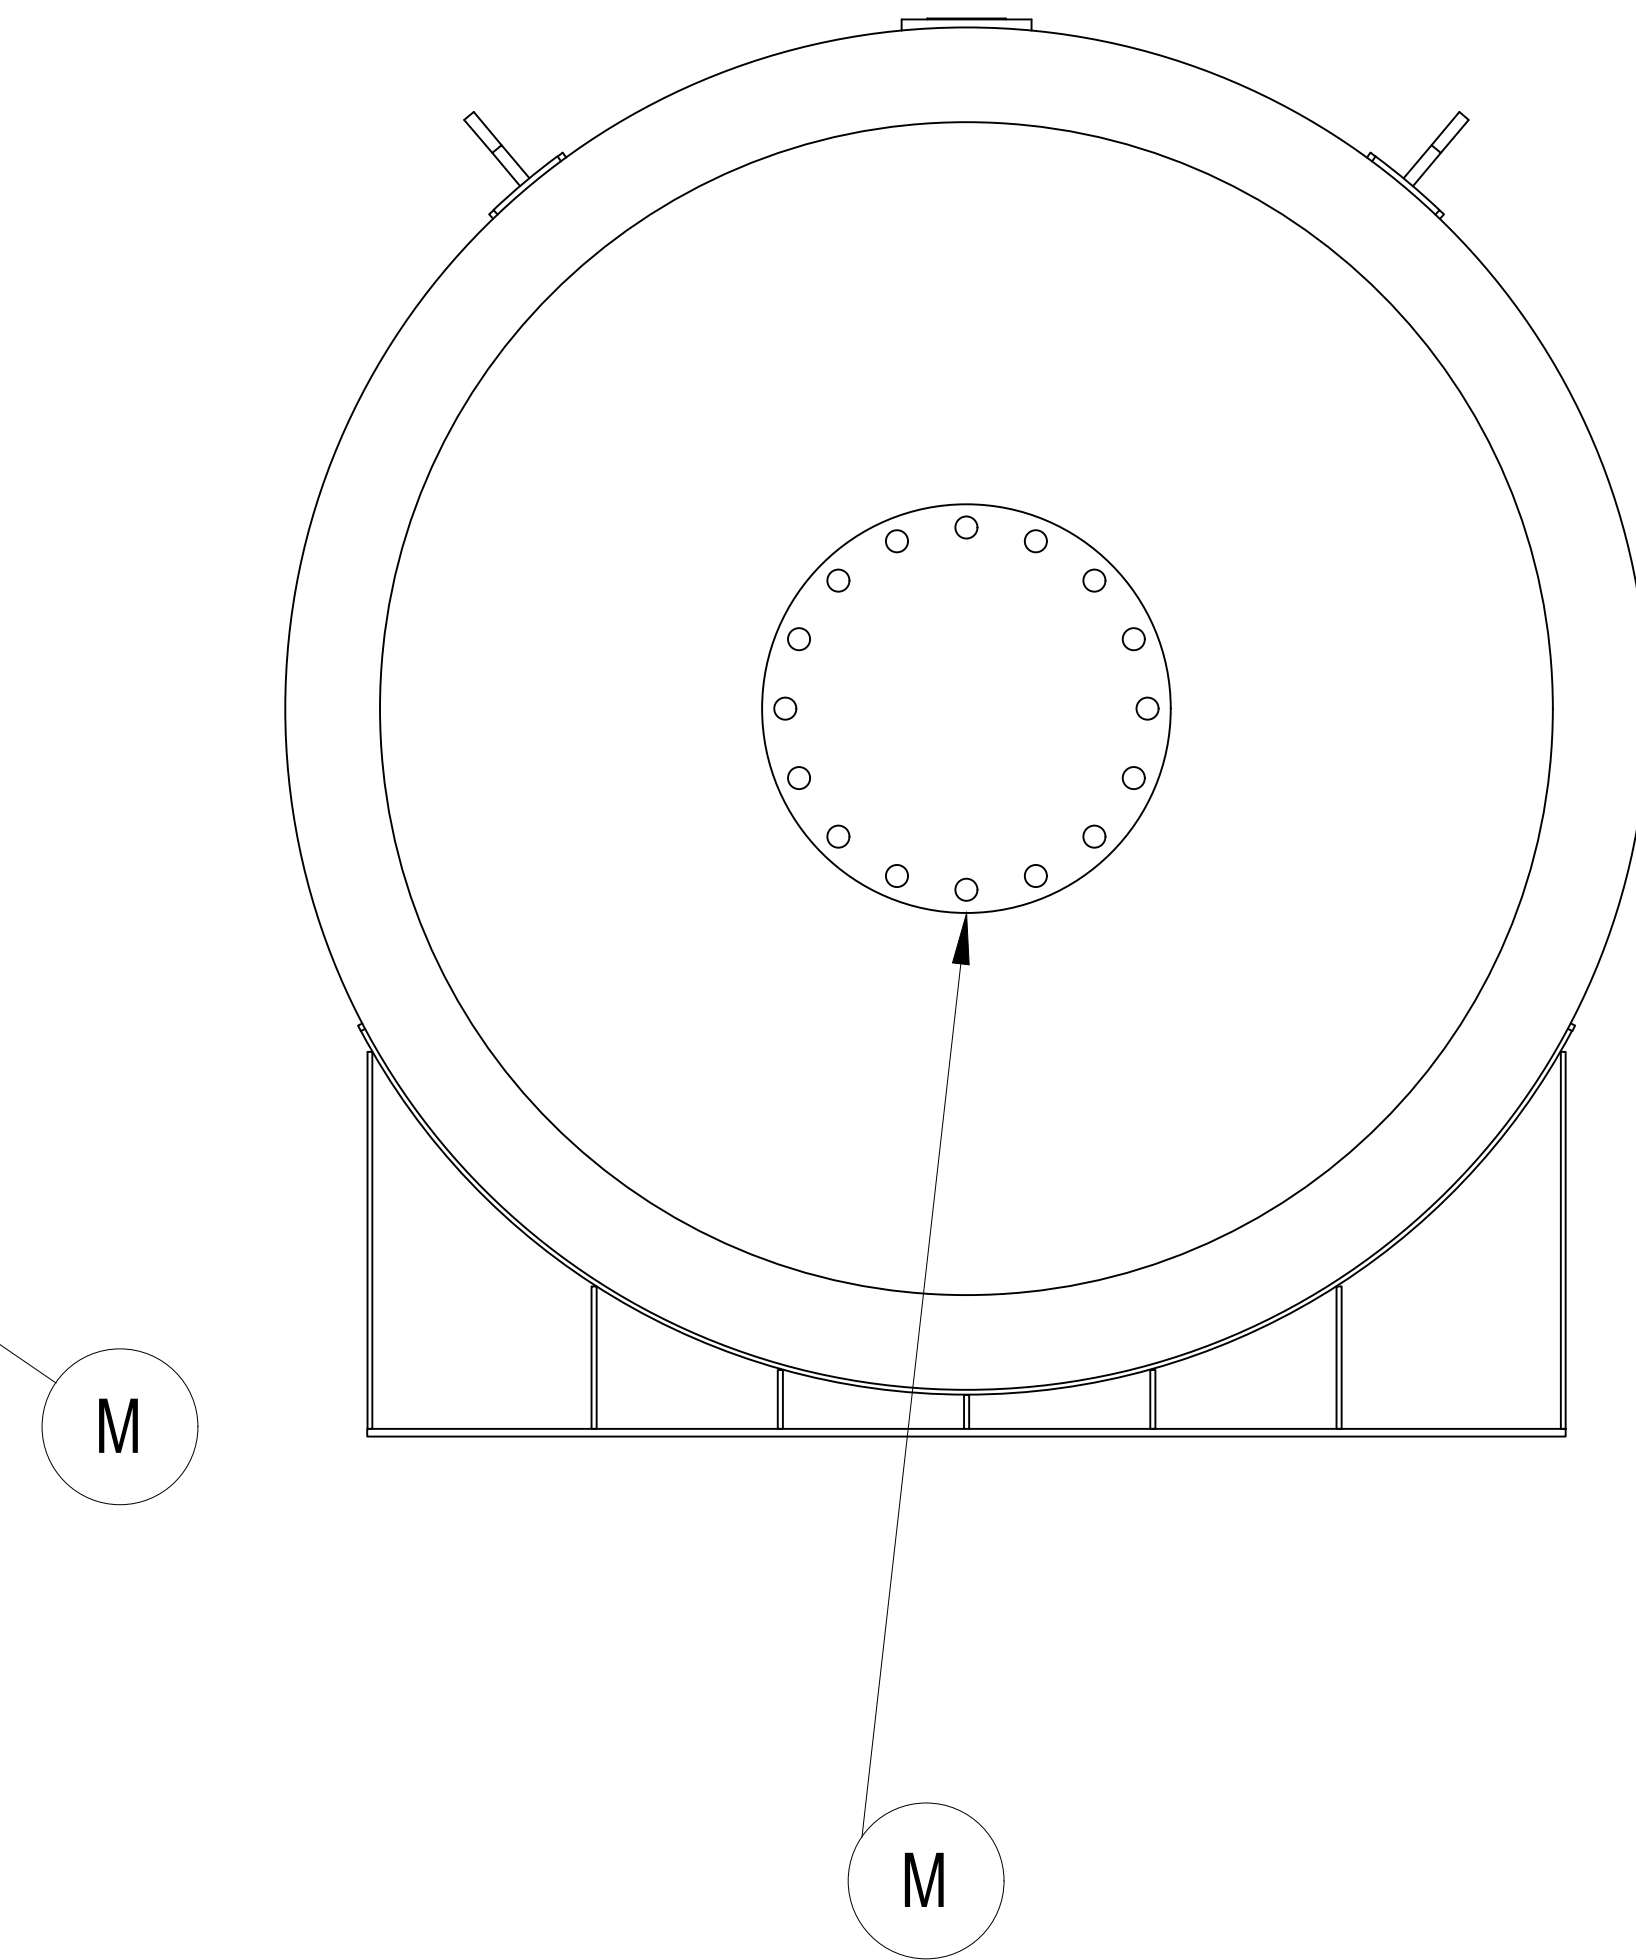
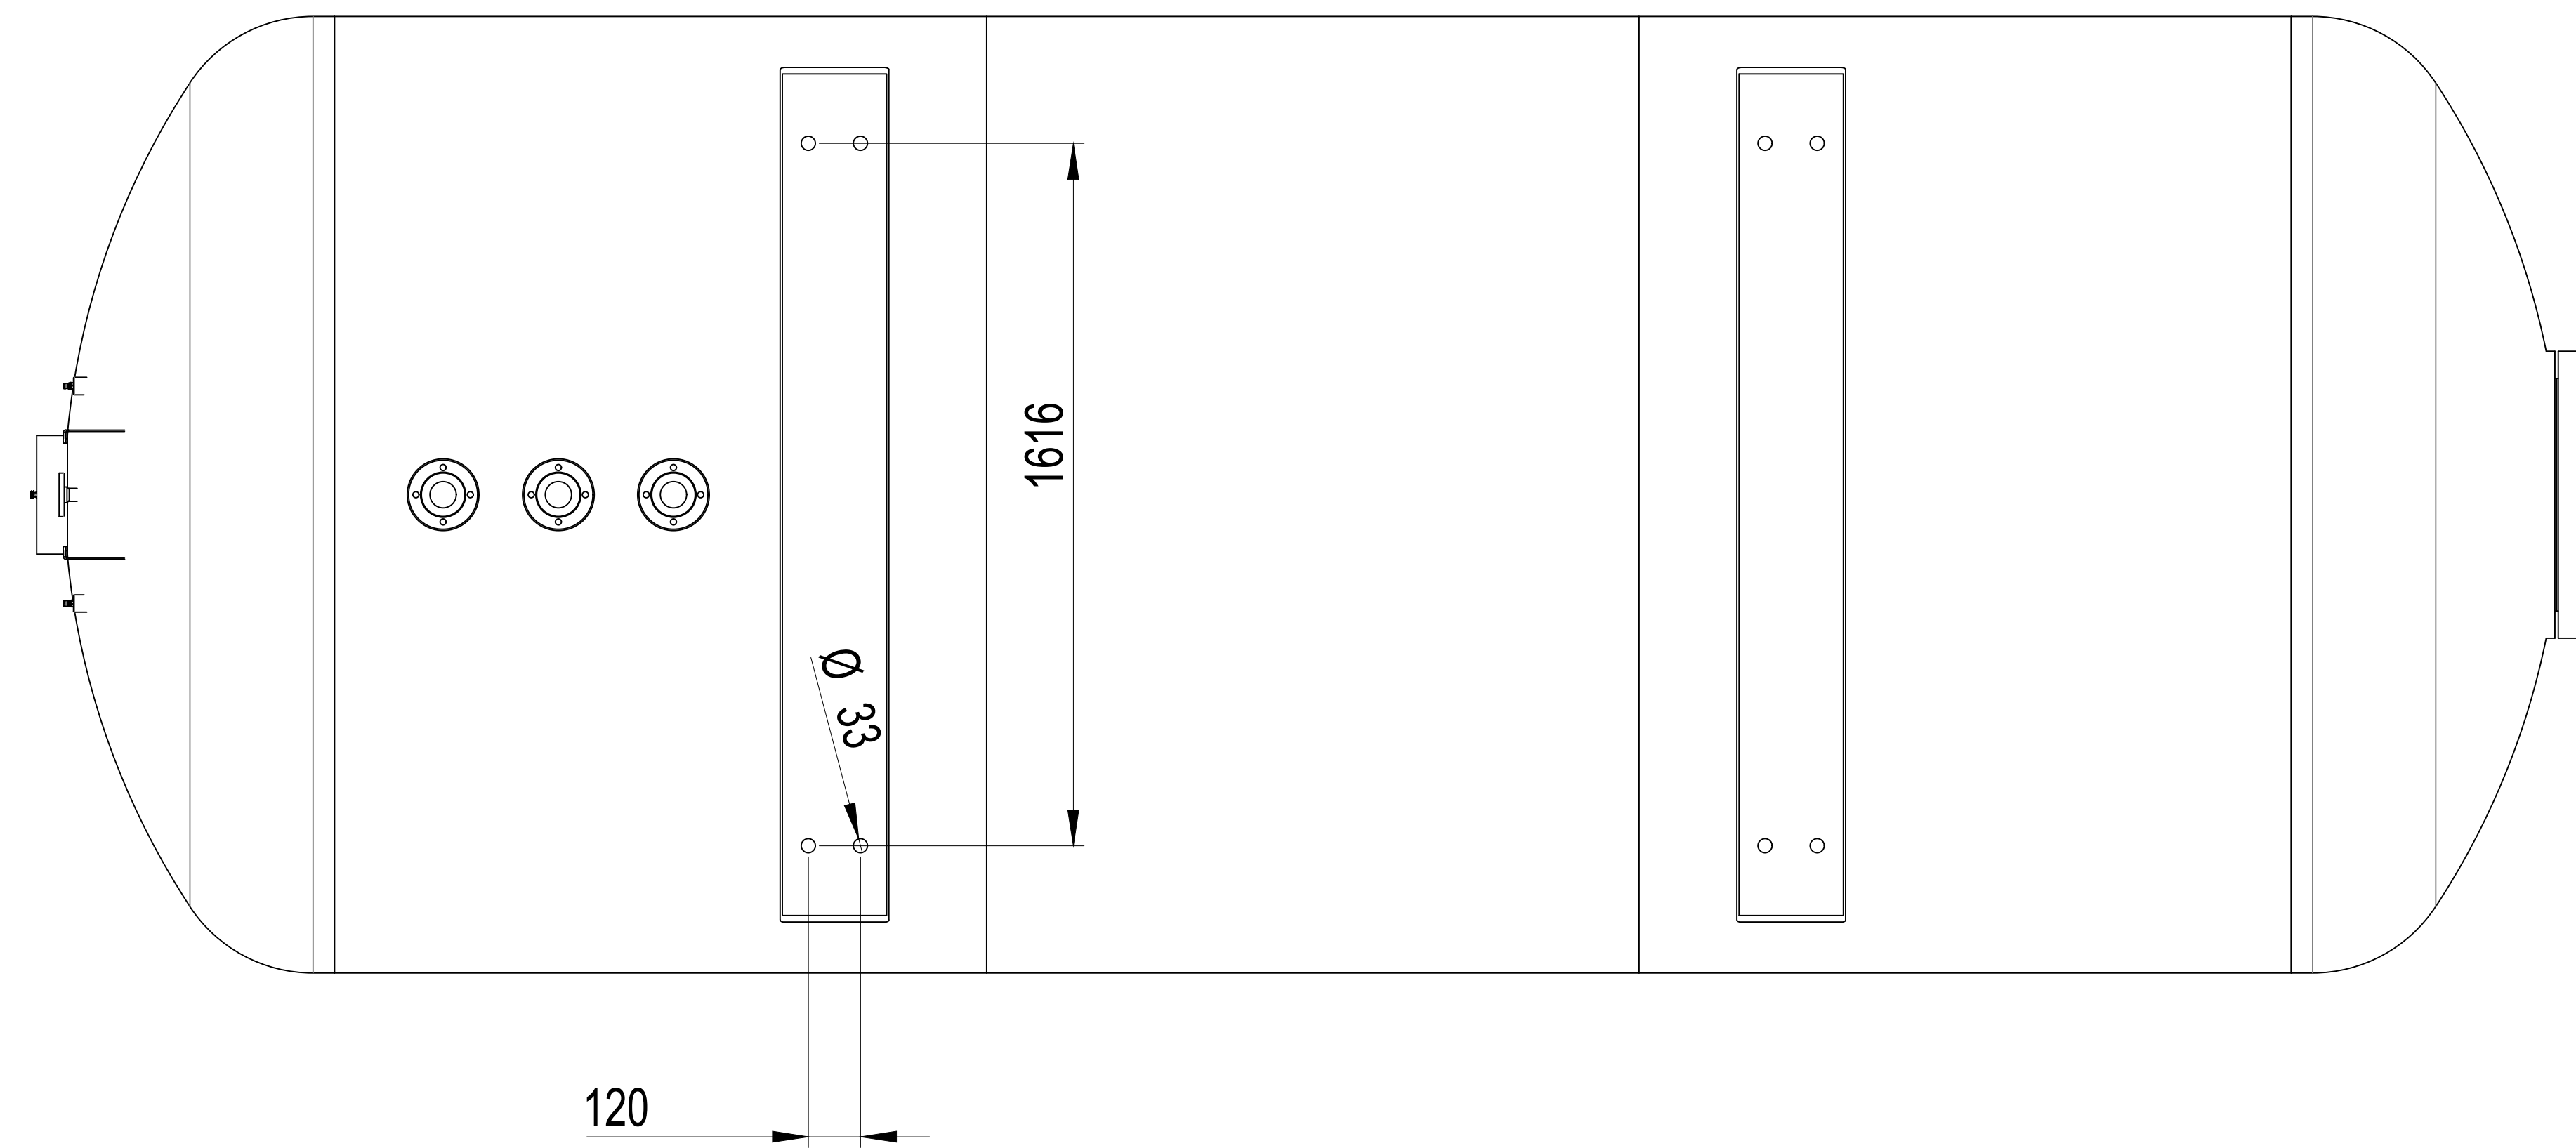


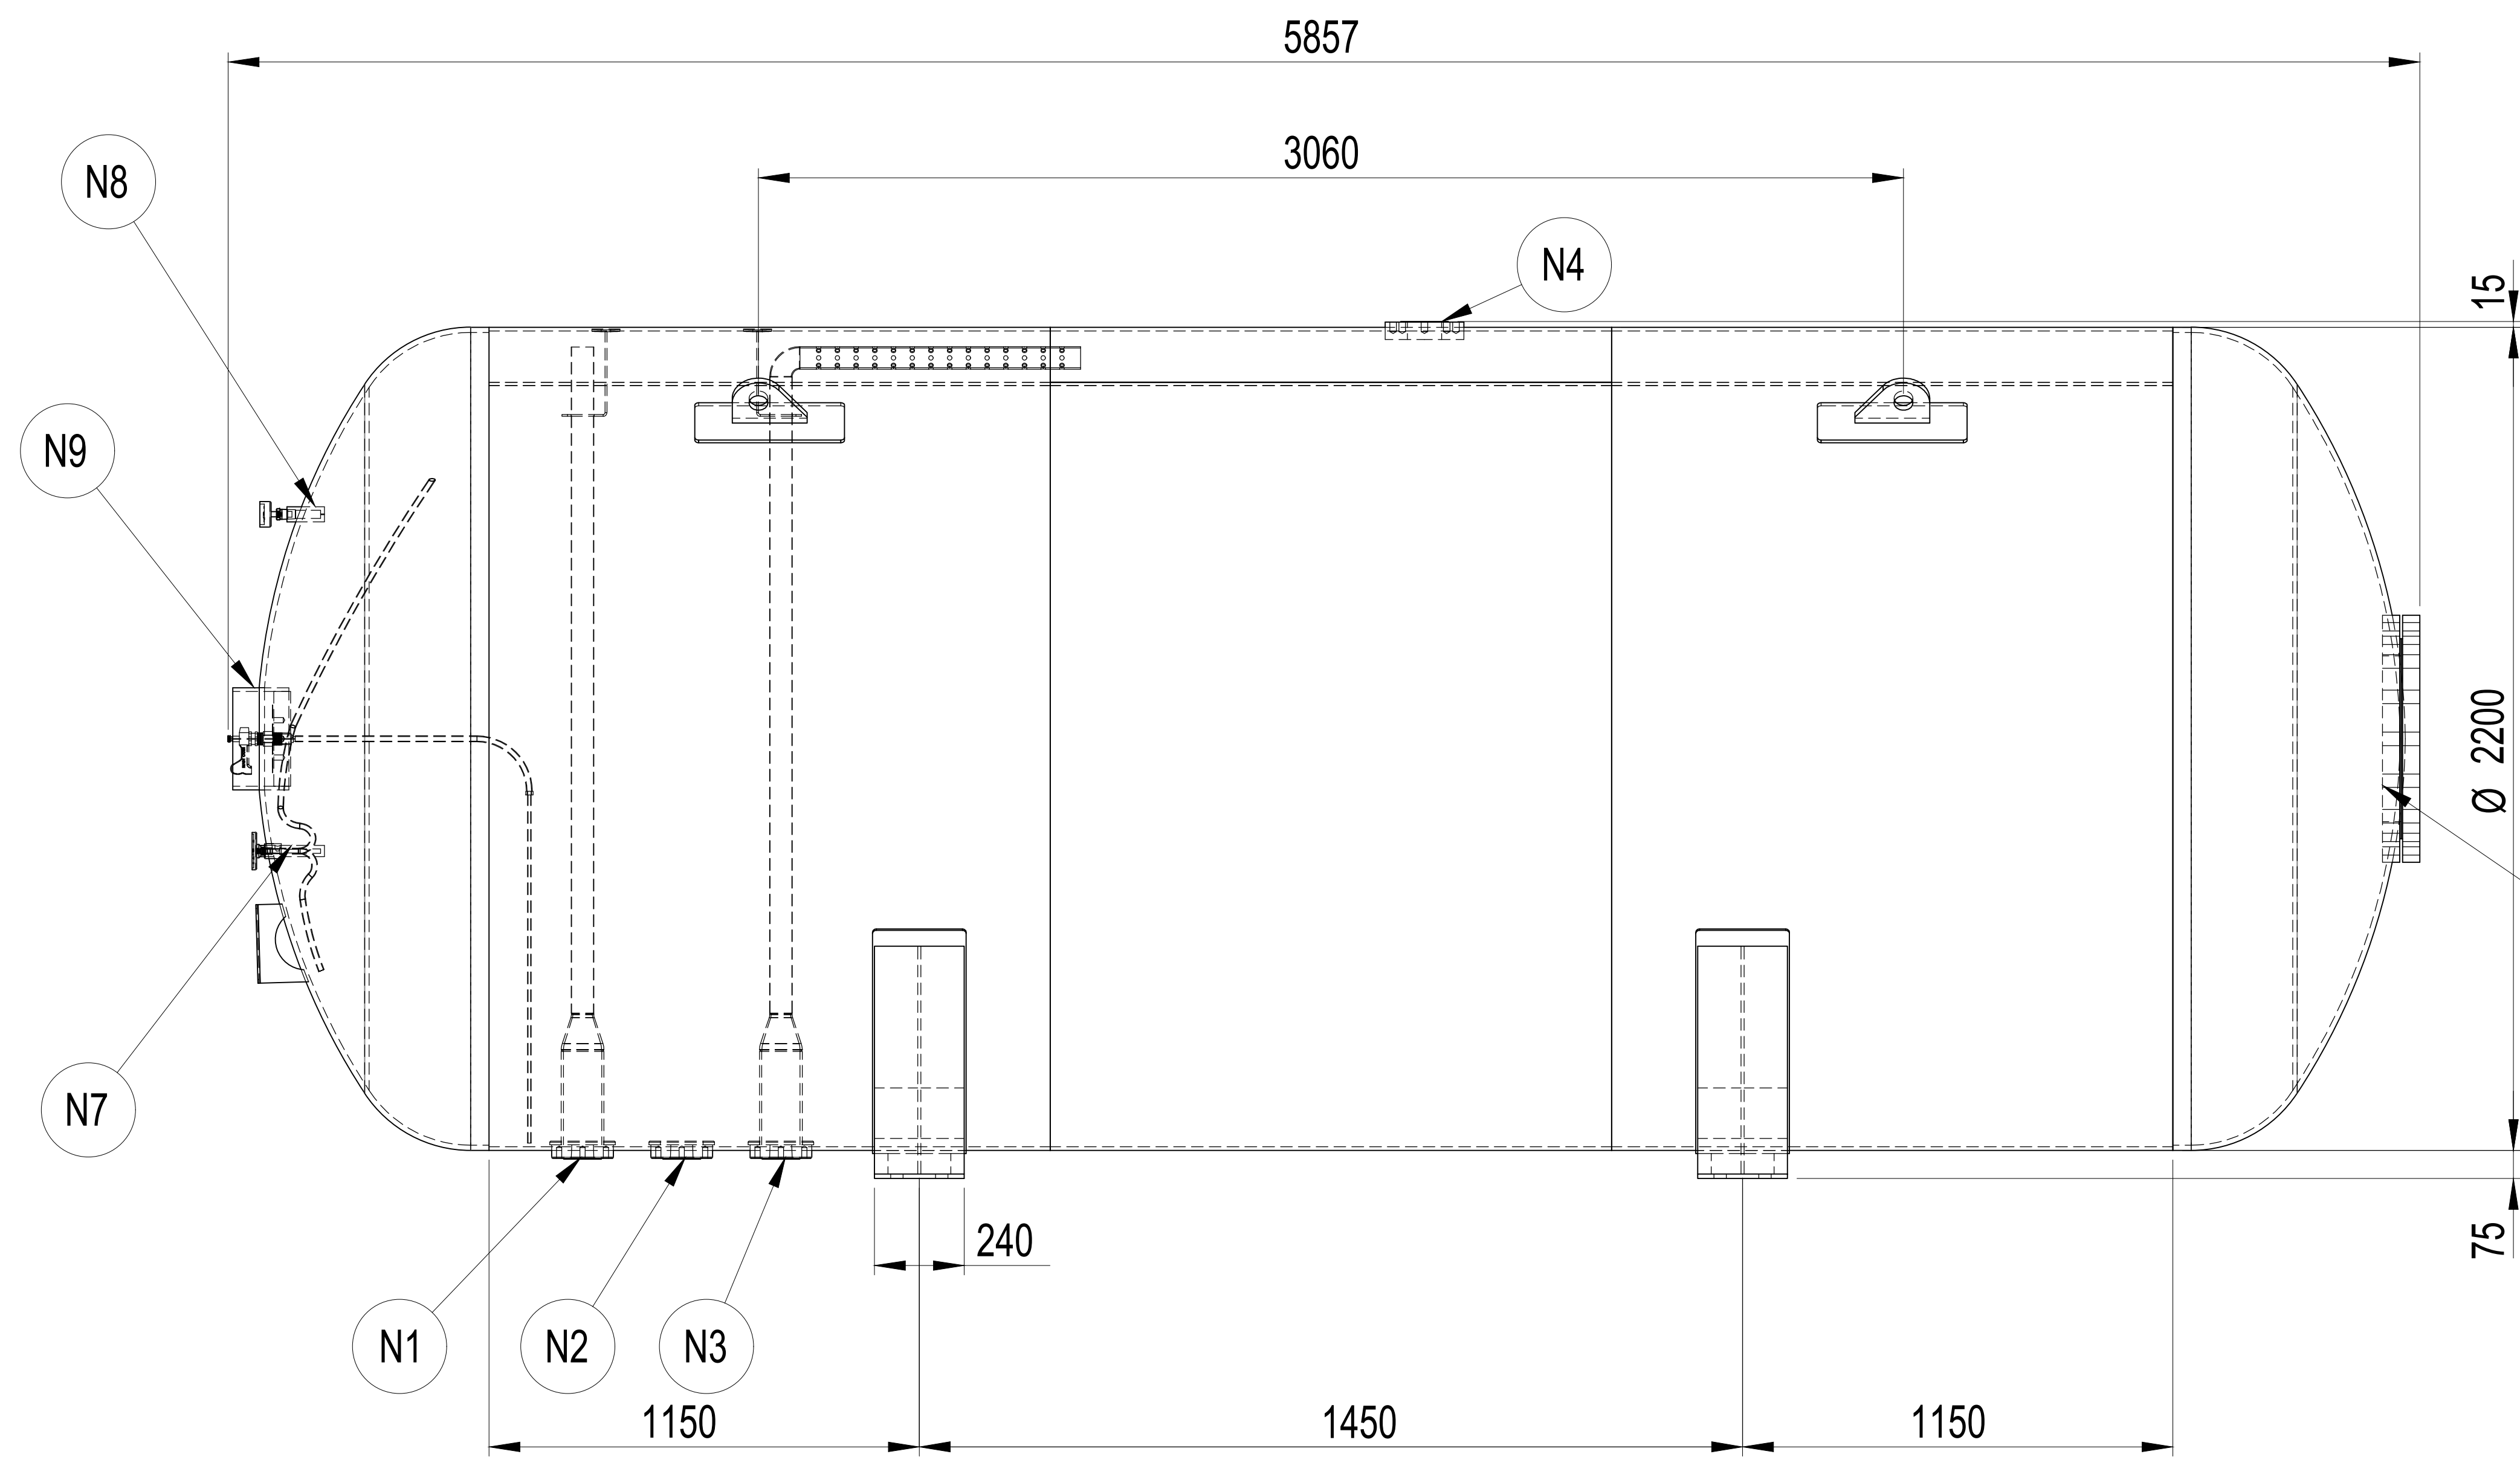

No	Description
N1	Gas Nozzle
N2	Bottom Filling Nozzle
N3	Top Filling Nozzle
N4	Safety Valve Nozzle
N5	Fixed Level Nozzles
N6	Fixed Level Nozzles
N7	Manometer Nozzle
N8	Thermometer Nozzle
N9	Rotogauge Nozzle
M	Manhole

Design Conditions		
Design Standart	ASME Section VIII Div.1	-
MAWP	17,5	BAR
Volume	17	M3
Services	LPG	-
Insulation	NO	-
Hidrostatic Test Pressure	According to Code	BAR
Design Temperature	+50/-20	°C
Corrosion Allowance	1	mm
Density	560	kg/m3
Heat Treatment	Only For Heads	

REV.02				
REV.01				
REV.NO.	REVİZYON AÇIKLAMASI / DESCRIPTION OF REVISION	REVISED BY	REV.TARİHİ / REV.DATE	
ÜRETİM İÇİN NOTLAR: METAL MALZEMELER İÇİN TÜM KESKİN KÖŞELERE 2mm RADIUS VERİLECEKTİR.				
 Cryocan Basınçlı Kaplar, Endüstriyel Tesisler Sanayi Tic. Ltd. Sti. Ölçeri Çob Mahallesi Çayhan Cad. No: 611 41455 Gebze, Kocaeli, Türkiye www.cryocan.com Tel : 0262 644 12 00	PART NO	REV. NO:	REF. PART NO	HOMOLOGATION
	--	00		--
	PART NAME			
	17 m3 LPG Storage Tank			
	METARIAL	DIMENSIONS (mm)	WEIGHT (kg)	TOLERANCE Std.
--	--		ISO 2768/ DIN 6935	1/1
ADDITION INFORMATION		NOTES	SCALE	
--		--	1:50	
TARİH / DATA			P. SIZE	
23.01.2024			A2	