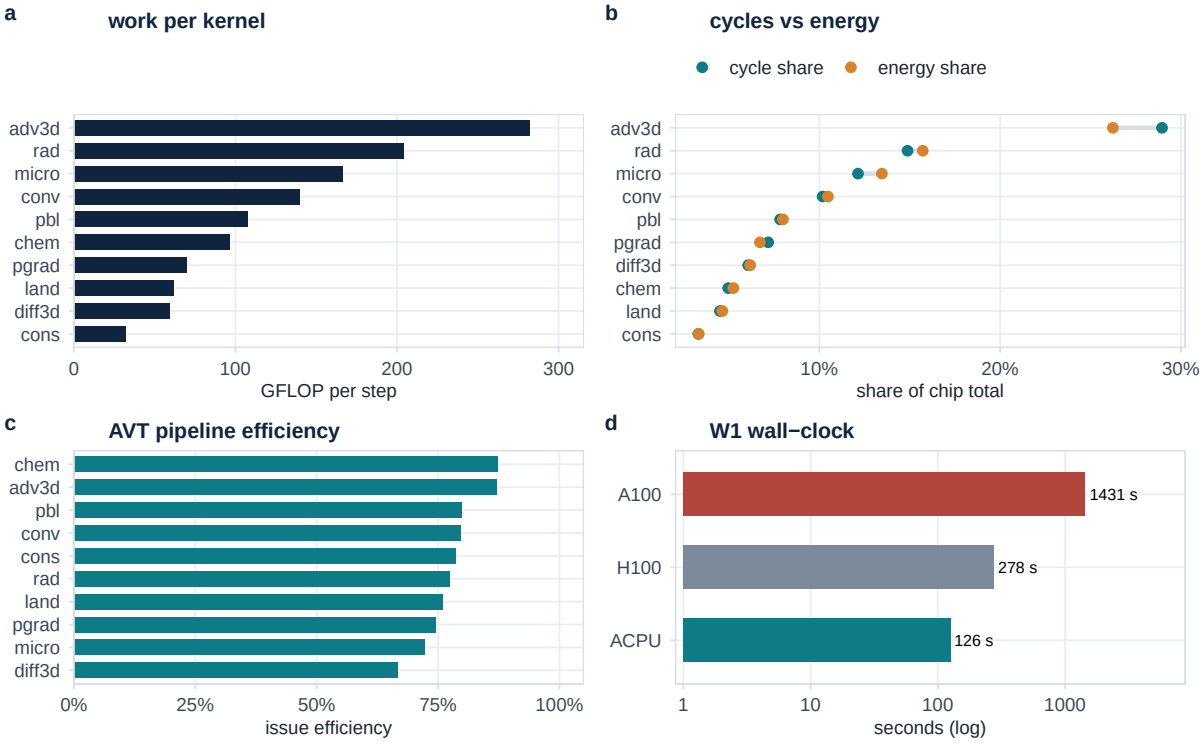
a
work per kernel
adv3d
rad
micro
conv
pbl
chem
pgrad
land
diff3d
cons
0
100
200
300
GFLOP per step
b
cycles vs energy
cycle share
energy share
adv3d
rad
micro
conv
pbl
pgrad
diff3d
chem
land
cons
10%
20%
30%
share of chip total
c
AVT pipeline efficiency
chem
adv3d
pbl
conv
cons
rad
land
pgrad
micro
diff3d
0%
25%
50%
75%
100%
issue efficiency
d
W1 wall−clock
A100
H100
ACPU
1431 s
278 s
126 s
1
10
100
1000
seconds (log)