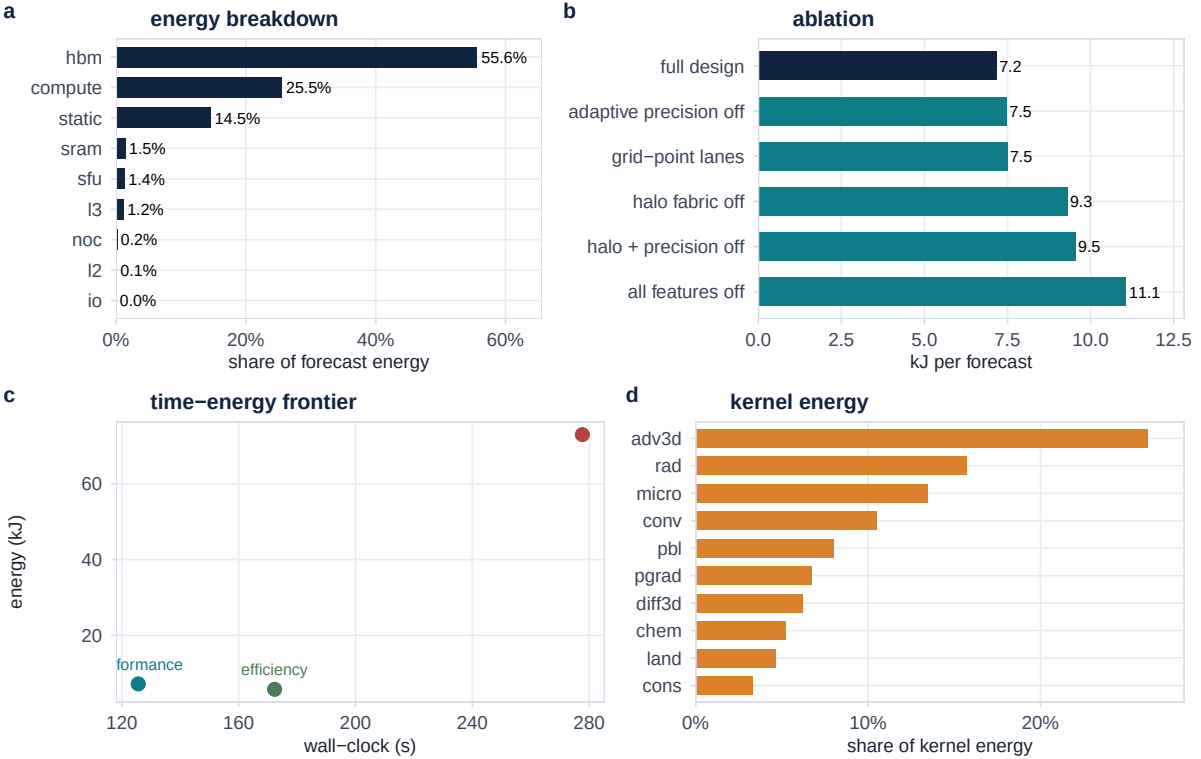
a
energy breakdown
hbm
compute
static
sram
sfu
l3
noc
l2
io
55.6%
25.5%
14.5%
1.5%
1.4%
1.2%
0.2%
0.1%
0.0%
0%
20%
40%
60%
share of forecast energy
b
ablation
full design
adaptive precision off
grid−point lanes
halo fabric off
halo + precision off
all features off
7.2
7.5
7.5
9.3
9.5
11.1
0.0
2.5
5.0
7.5
10.0
12.5
kJ per forecast
c
time−energy frontier
energy (kJ)
60
40
20
formance
efficiency
120
160
200
240
280
wall−clock (s)
d
kernel energy
adv3d
rad
micro
conv
pbl
pgrad
diff3d
chem
land
cons
0%
10%
20%
share of kernel energy