

a Package cross-section

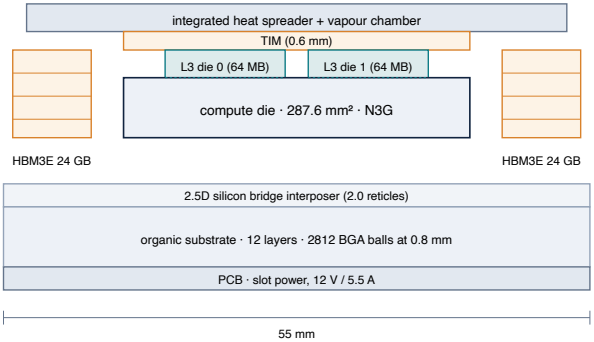

Hybrid bonding of the two L3 dies (6 μm pitch) keeps 128 MB within 0.4 pJ/byte of the AVTs; the HBM stacks sit on the same interposer for a 2.4 TB/s state stream.

b Top view

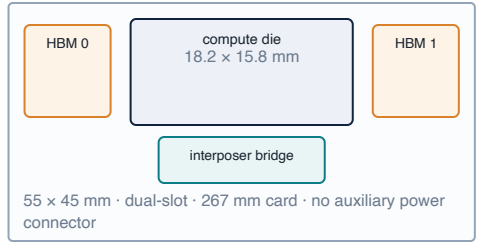

c Mechanical / SI budget

item	value
package	55 × 45 mm, 2.5D
balls / pitch	2812 / 0.8 mm
power delivery	0.75 V, 80 A, 1.2 mΩ
PCIe 6.0	x16, 121 GB/s
HBM link	2 × 1024 bit, 9.6 Gbps
cooling	vapour chamber, 2 fans