
a Metal stack

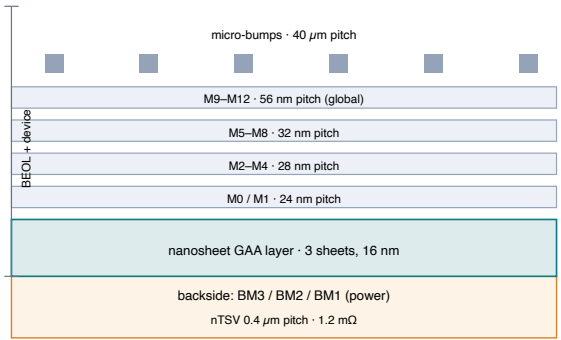

b Interconnect RC

layer	pitch	R	C
M1	24 nm	62 Ω/μm	0.21 fF/μm
M4	32 nm	28 Ω/μm	0.18 fF/μm
M8	40 nm	9 Ω/μm	0.16 fF/μm
M12	56 nm	3 Ω/μm	0.14 fF/μm
BM1	0.4 μm	0.9 Ω/μm	0.09 fF/μm

Halo and NoC links are kept on M9–M12 with 2× width for electromigration margin.

c Supply integrity



23% lower static IR drop at the 80 A peak; the remaining budget covers 14 mV of dynamic droop from the 1.8 GHz di/dt events.