
# XIAO ESP32C3 adapter for the GPS2 socket (Dual-Left, U11) of the AiO v4.5 Micro

GPS2 socket: pin 2 = Teensy RX2 (pin 7), pin 3 = Teensy TX2 (pin 8). On the Teensy it is Serial2.


Power: the 3.3 V of the socket (the board's 1 A K7803M regulator) goes into the XIAO 3V3 pin. Do not plug in the XIAO USB-C with the adapter on the board.

R1 and R2: 100 ohm in series on the serial lines (protection). On the ESP32-C3: Serial0 = D6 TX (GPIO21) and D7 RX (GPIO20).

Not connected: pins 6 to 8 (F9P USB), 16 (wired to the GPS1 socket), 18 (LED RTK_STAT_1) and the other NC pins.

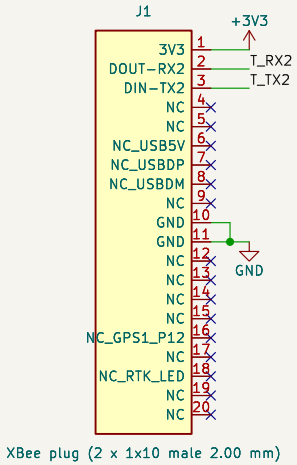



XBee plug (2 x 1x10 male 2.00 mm)







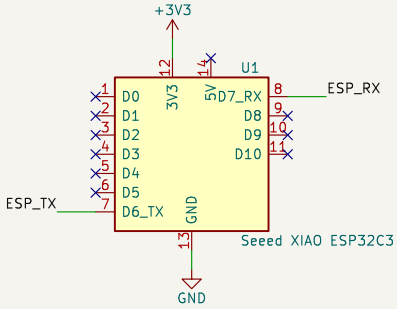


GPS2 socket pins copied from the official AiO v4.5 Micro PCB

**renatorgr**

Sheet: /

File: AiO_Micro45_XIAO_C3.kicad_sch

***Title: AiO v4.5 Micro – XIAO ESP32C3 adapter (GPS2 / Serial2)***

| Size: A4 | Date: 2026-10-14 | **Rev: 1.0** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 1/1 |