




# CONNECTORS

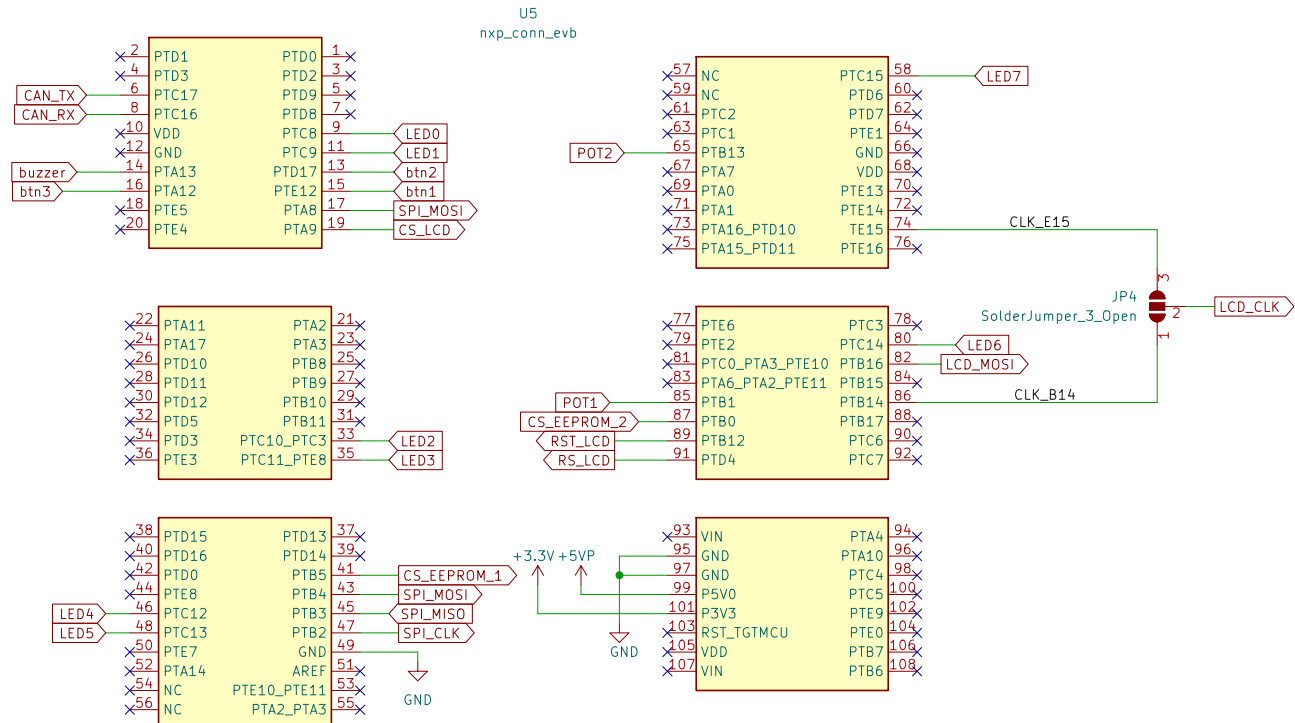


# BUTTONS

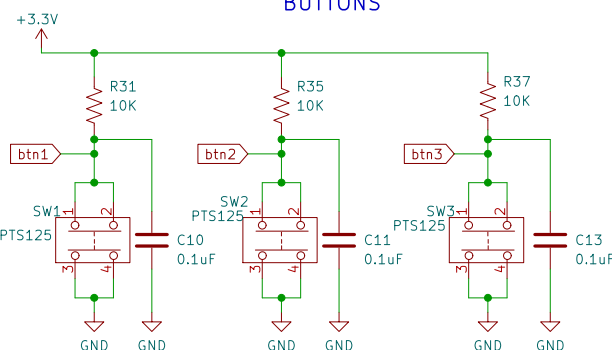


# LEDs

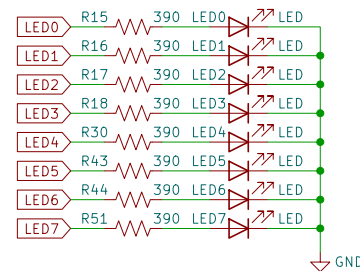


# POTS

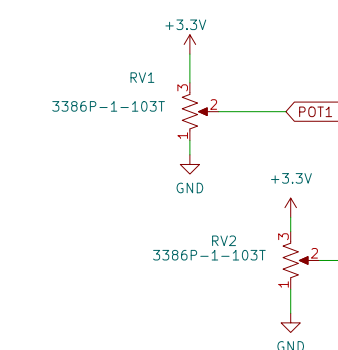


# BUZZER




# EEPROM 1

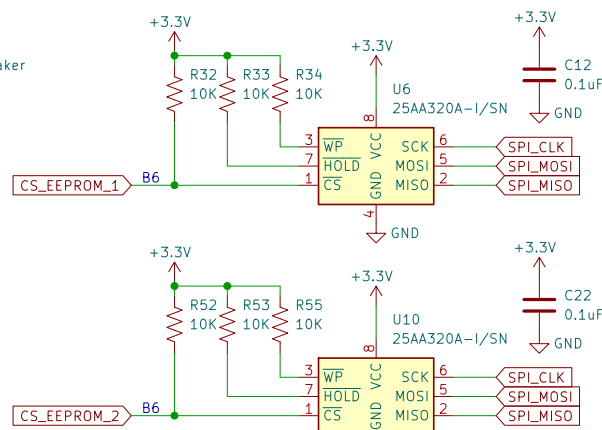





# EEPROM 2

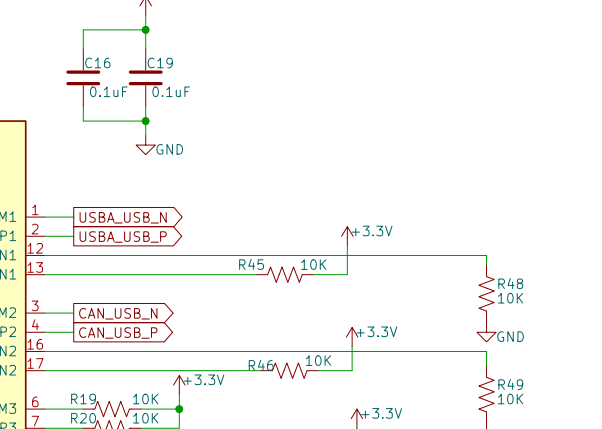


# DISPLAY OLED



# MONITOR

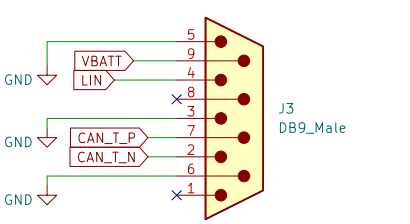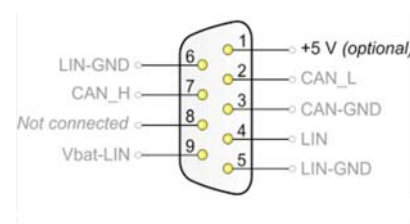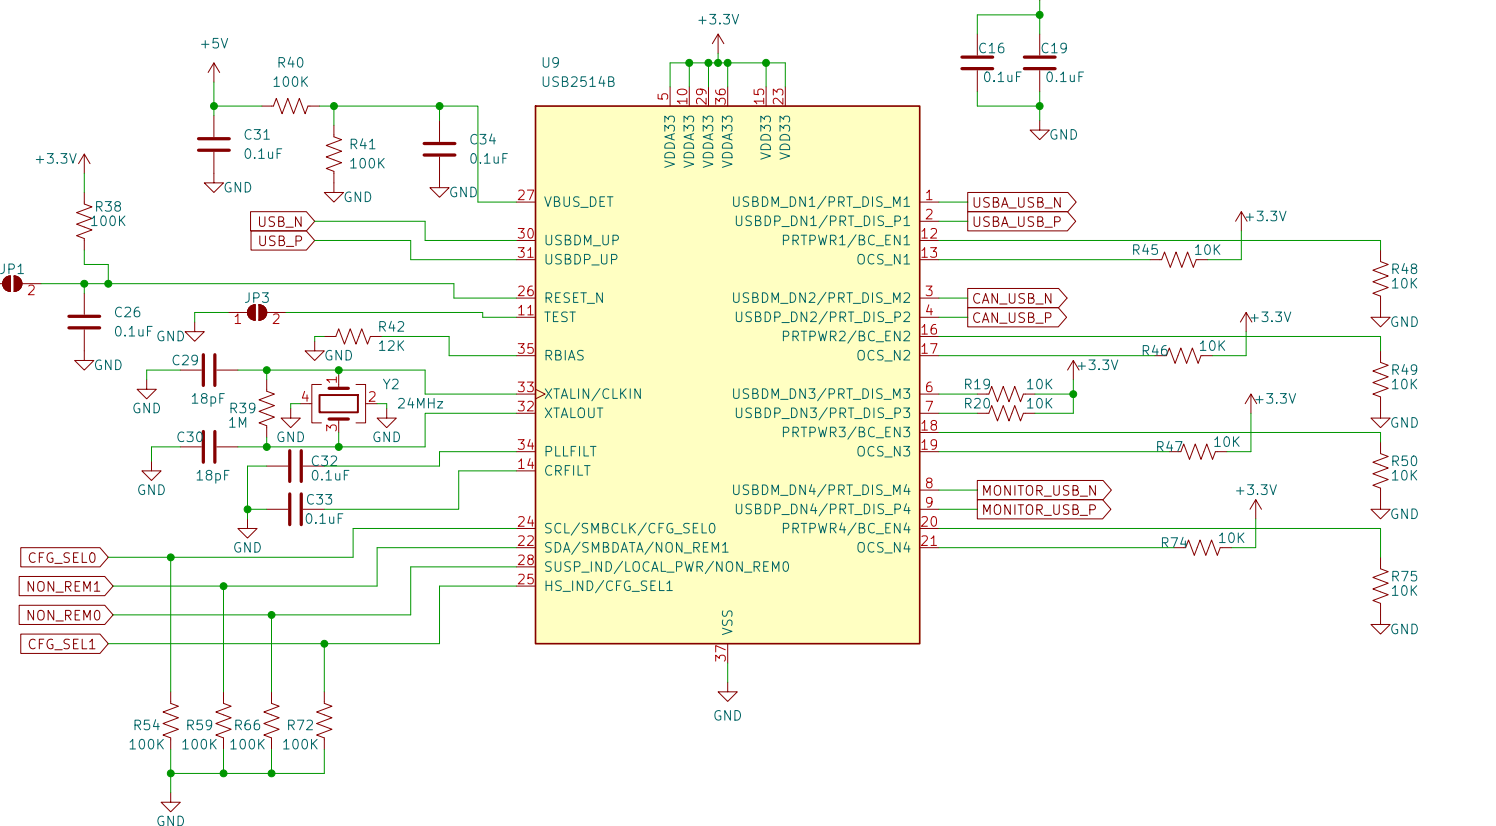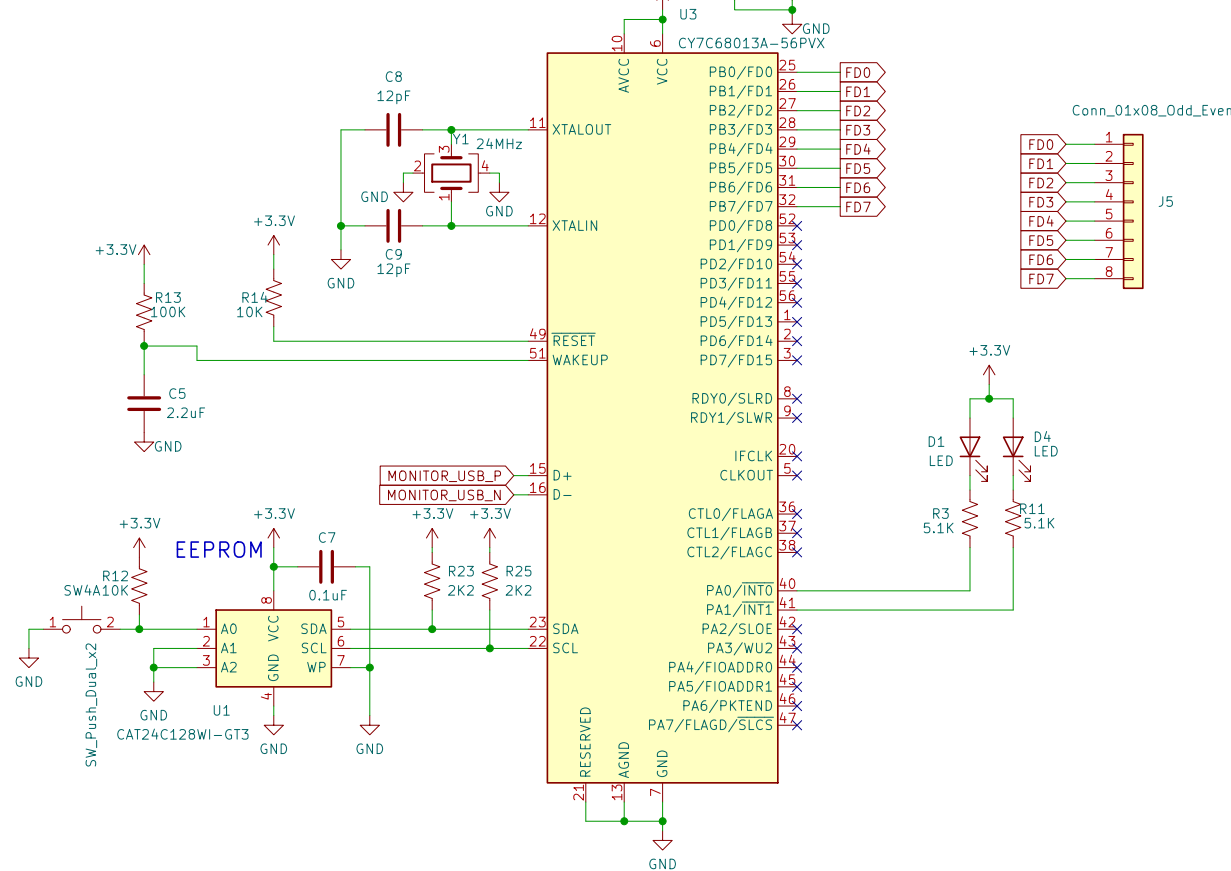

# CAN TRANSCEIVER

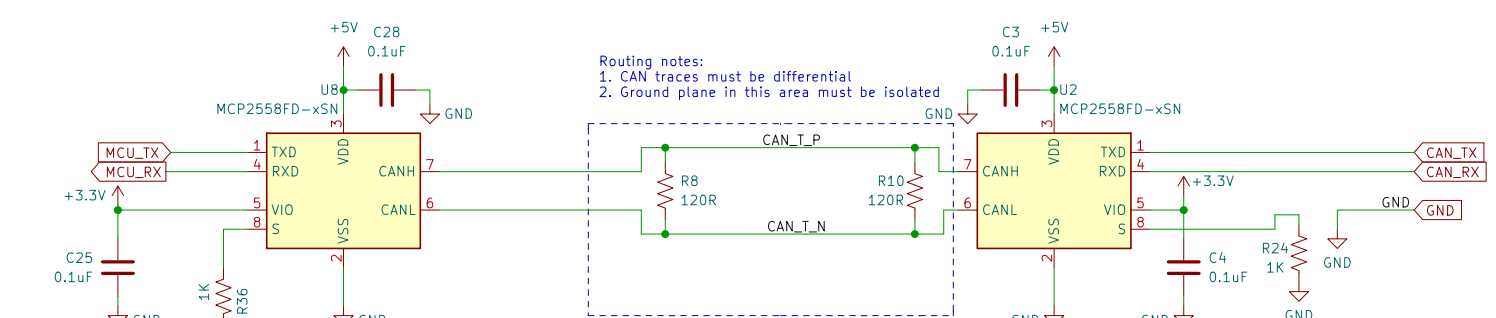


Routing notes:


1. CAN traces must be differential

2. Ground plane in this area must be isolated

# USB A



# MAIN USB

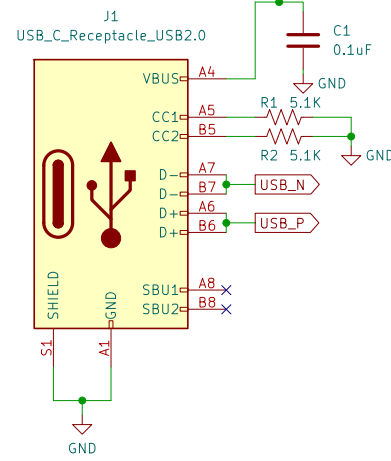

# CAN MCU

