

# RX Family

## Board Support Package Module Using Firmware Integration Technology

### Introduction

The foundation of any project that uses FIT modules is the Renesas Board Support Package (r\_bsp). The r\_bsp is easily configurable and provides all the code needed to get the MCU from reset to main(). The document covers conventions of the r\_bsp so that users will know how to use it, configure it, and create a BSP for their own board.

### Target Device

The following is a list of devices that are currently supported:

- **RX110, RX111, RX113 Groups**
- **RX130 Group**
- **RX210, RX21A Groups**
- **RX220 Group**
- **RX230, RX231, RX23T Groups**
- **RX24T Group**
- **RX24U Group**
- **RX610 Group**
- **RX62N, RX62T, RX62G Groups**
- **RX630, RX631, RX63N, RX63T Groups**
- **RX64M Group**
- **RX71M Group**
- **RX65N, RX651 Groups**
- **RX66T Group**
- **RX72T Group**

When using this application note with other Renesas MCUs, careful evaluation is recommended after making modifications to comply with the alternate MCU.

### Related Documents

- Firmware Integration Technology User's Manual (R01AN1833)
- RX Family Adding Firmware Integration Technology Modules to Projects (R01AN1723)
- RX Family Adding Firmware Integration Technology Modules to CS+ Projects (R01AN1826)
- Renesas e<sup>2</sup> studio Smart Configurator User Guide (R20AN0451)

## **Contents**

1. Overview .....	3
2. Features .....	6
3. Configuration .....	17
4. API Information.....	34
5. API Functions .....	41
6. Project Setup .....	66
7. Adding r_bsp manually.....	67
8. Adding FIT Modules to the User Project .....	79
9. Appendices.....	84
Technical Update Information .....	90
Website and Support .....	90

# 1. Overview

Before running the user application there are a series of operations that must be performed to get the MCU set up properly. These operations, and the number of operations, will vary depending on the MCU being used. Common examples include: setting up stack(s), initializing memory, configuring system clocks, and setting up port pins. No matter the application, these steps need to be followed. To make this process easier the Renesas Board Support Package, abbreviated as `r_bsp`, is provided.

At the lowest level the `r_bsp` provides everything needed to get the user's MCU from reset to the start of their application's `main()` function. The `r_bsp` also provides common functionality that is needed by many applications. Examples of this include callbacks for exceptions and functions to enable or disable interrupts.

While every application will need to address the same steps after reset, this does not mean that the settings will be the same. Depending on the application, stack sizes will vary and which clock is used will change. All `r_bsp` configuration options are contained in one header file for easy access.

Many customers start development on a Renesas development board and then transition to their own custom boards. When users move to their own custom hardware it is highly recommended they create a new BSP inside of the `r_bsp`. By following the same standards and rules that are used for the provided BSPs the user can get an early start on development knowing that their application code will move to their target board very easily. Details on how users can create their own BSPs are provided in this document.

## 1.1 Terminology

Term	Meaning
Platform	The user's development board. Used interchangeably with 'board'.
BSP	Short for Board Support Package. BSP's usually have source files related to a specific board.
Callback Function	This term refers to a function that is called when an event occurs. For example, the bus error interrupt handler is implemented in the <code>r_bsp</code> . The user will likely want to know when a bus error occurs. To alert the user, a callback function can be supplied to the <code>r_bsp</code> . When a bus error occurs the <code>r_bsp</code> will jump to the provided callback function and the user can handle the error. Interrupt callback functions should be kept short and be handled carefully because when they are called the MCU will still be inside of an interrupt and therefore will be delaying any pending interrupts.

## 1.2 File Structure

The `r_bsp` file structure is shown below in Figure 1-1. Underneath the root `r_bsp` folder there are 3 folders and 2 files. The first folder is named `doc` and contains `r_bsp` documentation.

The `board` folder contains the evaluation board folder, the `generic` folder, and the `user` folder. The evaluation board folder contains source files for the Renesas evaluation boards such as Renesas Starter Kits (RSK) and Renesas Solution Starter Kits (RSSK), and is provided for each evaluation board. The `generic` folder contains source files whose settings are independent of the board and is provided for each MCU. The structures of the evaluation board folder and generic folder are shown in “Figure 1-2 : Structures of Evaluation Board Folder and generic Folder”. The `user` folder is merely a placeholder and, for example, can be used for the user boards.

The `mcu` folder which has one folder per supported MCU. There is also a folder named `all` in this directory containing source that is common to all MCUs in the `r_bsp`. While `board` folders have source files specific to a board, `mcu` folders contain source that is shared between MCUs in the same MCU Group. This means that if the user has two distinct boards that both use a version of the RX63N then each board will have its own `board` folder (i.e. `board >> my_board_1` & `board >> my_board_2`) but both will share the same `mcu` folder (i.e. `mcu >> rx63n`). Even if the two RX63N MCUs have different packages or memory sizes they will still share the same `mcu` folder.

The file `platform.h` is provided for the user to choose their current development platform. `platform.h`, in turn, selects all the proper header files from the `board` and `mcu` folders to be included in the user’s project. This is discussed in more detail in later sections. The `readme.txt` file is a standard text file that is provided with all FIT Modules that provides brief information about the `r_bsp`.


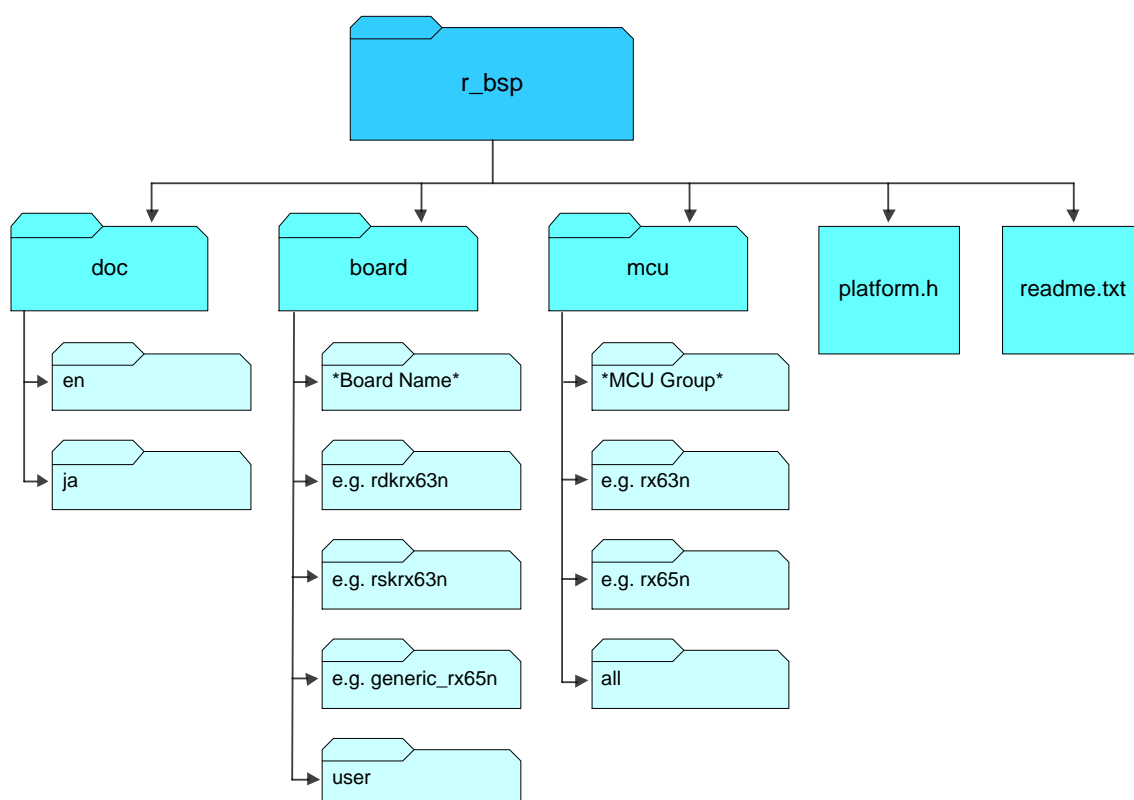


Figure 1.1 `r_bsp` File Structure

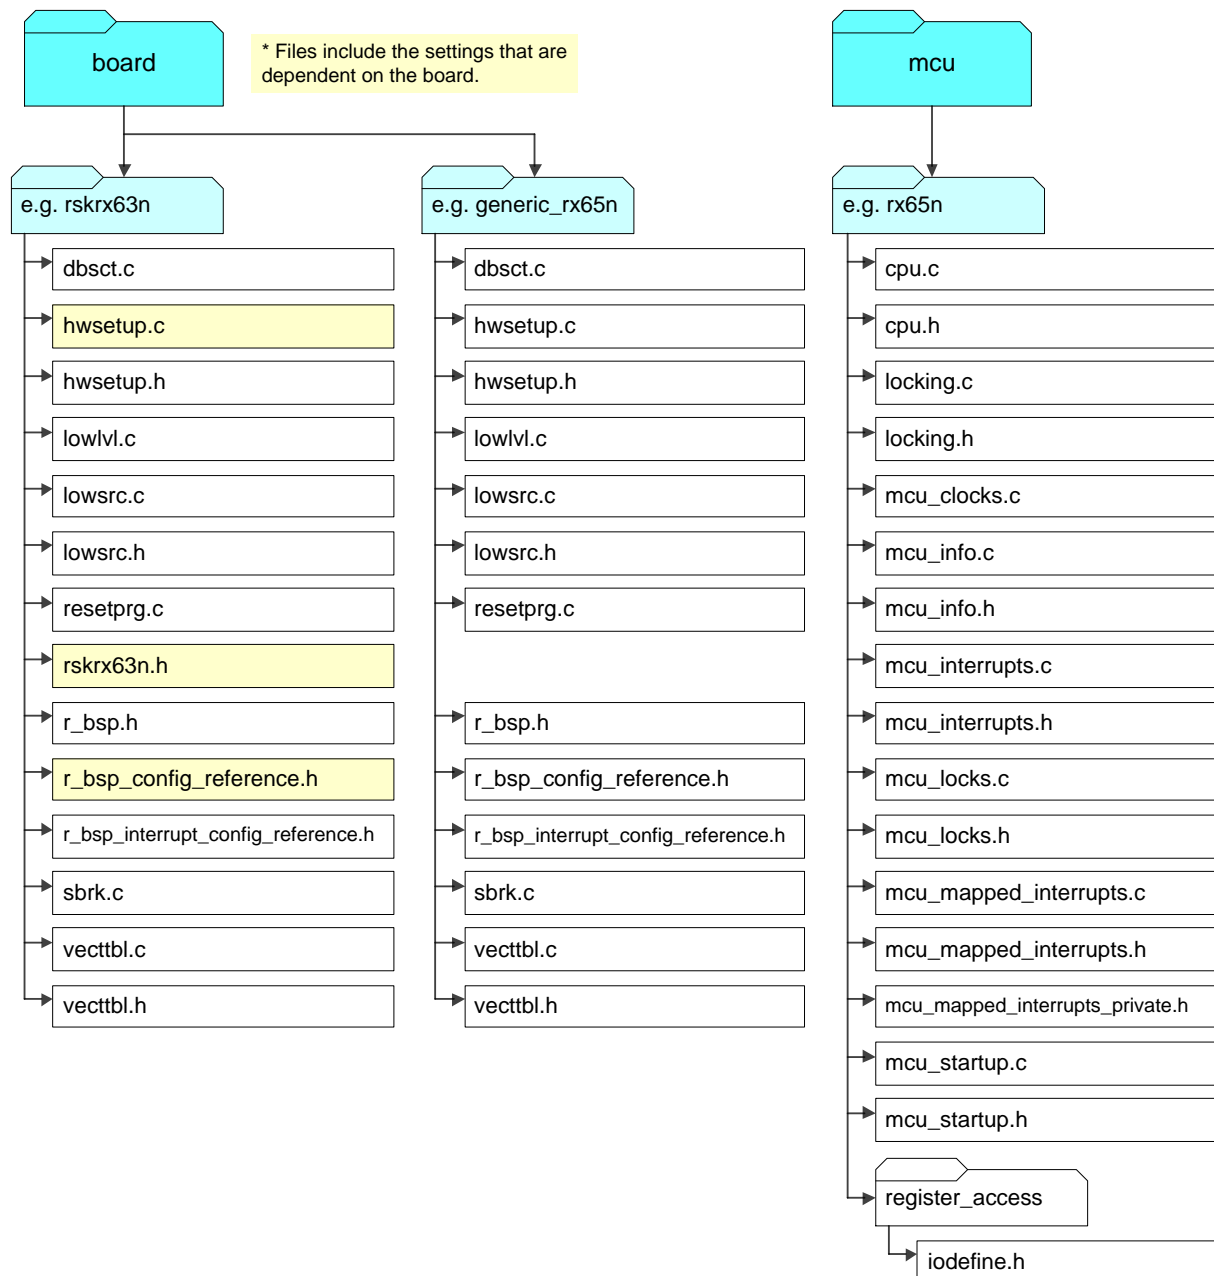

**Figure 1.2 Structures of Evaluation Board Folder and generic Folder**

## 2. Features

This section will go into more detail on the features provided by the `r_bsp`.

### 2.1 MCU Information


One of the main benefits of the `r_bsp` is that the user defines their global system settings only once, in a single place in the project. This information is defined in the `r_bsp` and then used by FIT Modules and user code. FIT Modules can use this information to automatically configure their code for the user's system configuration. If the `r_bsp` did not provide this information then the user would have to specify system information to each FIT Module separately.

Configuring the `r_bsp` is discussed in Section 3. The `r_bsp` uses this configuration information to set macro definitions in `mcu_info.h`. Each MCU may have different macros in `mcu_info.h`, but below are some common examples.

Define	Meaning
<b>BSP_MCU_SERIES_&lt;MCU_SERIES&gt;</b>	Which MCU Series this MCU belongs to. Example: <code>BSP_MCU_SERIES_RX600</code> would be defined if the MCU was an RX62N, RX62T, RX630, RX63N, etc.
<b>BSP_MCU_&lt;MCU_GROUP&gt;</b>	Which MCU Group this MCU belongs to. Example: <code>BSP_MCU_RX111</code> would be defined if the MCU was an RX111.
<b>BSP_PACKAGE_&lt;PACKAGE_TYPE&gt;</b>	The package of the MCU. Example: <code>BSP_PACKAGE_LQFP100</code> would be defined for a 100-pin LQFP package MCU.
<b>BSP_PACKAGE_PINS</b>	How many pins this MCU has.
<b>BSP_ROM_SIZE_BYTES</b>	The size of the user application ROM space in bytes.
<b>BSP_RAM_SIZE_BYTES</b>	The size of the RAM available to the user in bytes. In some MCUs the RAM area is not contiguous.
<b>BSP_DATA_FLASH_SIZE_BYTES</b>	The size of the data flash area in bytes.
<b>BSP_&lt;CLOCK&gt;_HZ</b>	There will be one of these macros for each clock on the MCU. Each macro will define that clock's frequency in Hertz. Examples: <code>BSP_LOCO_HZ</code> defines the LOCO frequency in Hz. <code>BSP_ICLK_HZ</code> defines the CPU clock in Hz. <code>BSP_PCLKB_HZ</code> defines the Peripheral Clock B in Hz.
<b>BSP_MCU_IPL_MAX</b>	The maximum interrupt priority level for the MCU.
<b>BSP_MCU_IPL_MIN</b>	The minimum interrupt priority level for the MCU.
<b>FIT_NO_FUNC</b> and <b>FIT_NO_PTR</b>	These macros can be used as arguments in function calls to specify that the nothing is being supplied for an argument. For example, if a function takes an optional argument for a callback function then <code>FIT_NO_FUNC</code> could be used if the user did not wish to supply a callback function. These macros are defined to point to reserved address space. This is done so that if the argument is used improperly it is easier to catch. The reason for this is that if the MCU attempts to access reserved space then a bus error will occur and the user will know immediately. If <code>NULL</code> was used instead then a bus error would not occur because <code>NULL</code> is typically defined as 0 which is a valid RAM location on the RX.

## 2.2 Initialization

The PowerON\_Reset\_PC() function in *resetprg.c* is set as the reset vector for the MCU. This function performs a number of chip initialization actions to get the MCU ready to jump to the user's application. The flowchart below details operations of the PowerON\_Reset\_PC() function and the system clock setting.

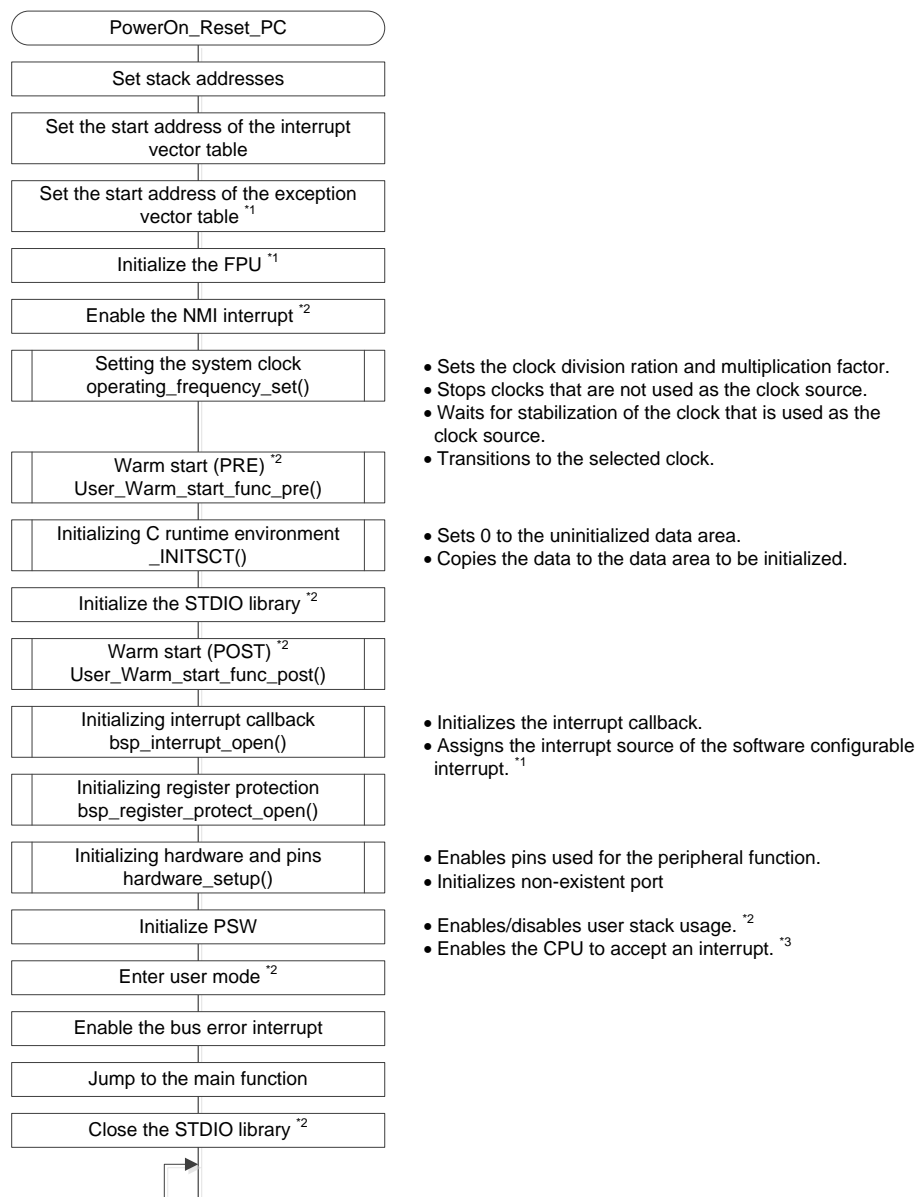


Note 1: The MCU skips this procedure.

Note 2: The operation varies depending on the setting in the *r\_bsp\_config.h*.

Note 3: Only acceptance of CPU interrupts is enabled. Acceptance of each peripheral interrupt must be enabled separately.

**Figure 2.1 Flowchart of PowerON\_Reset\_PC()**

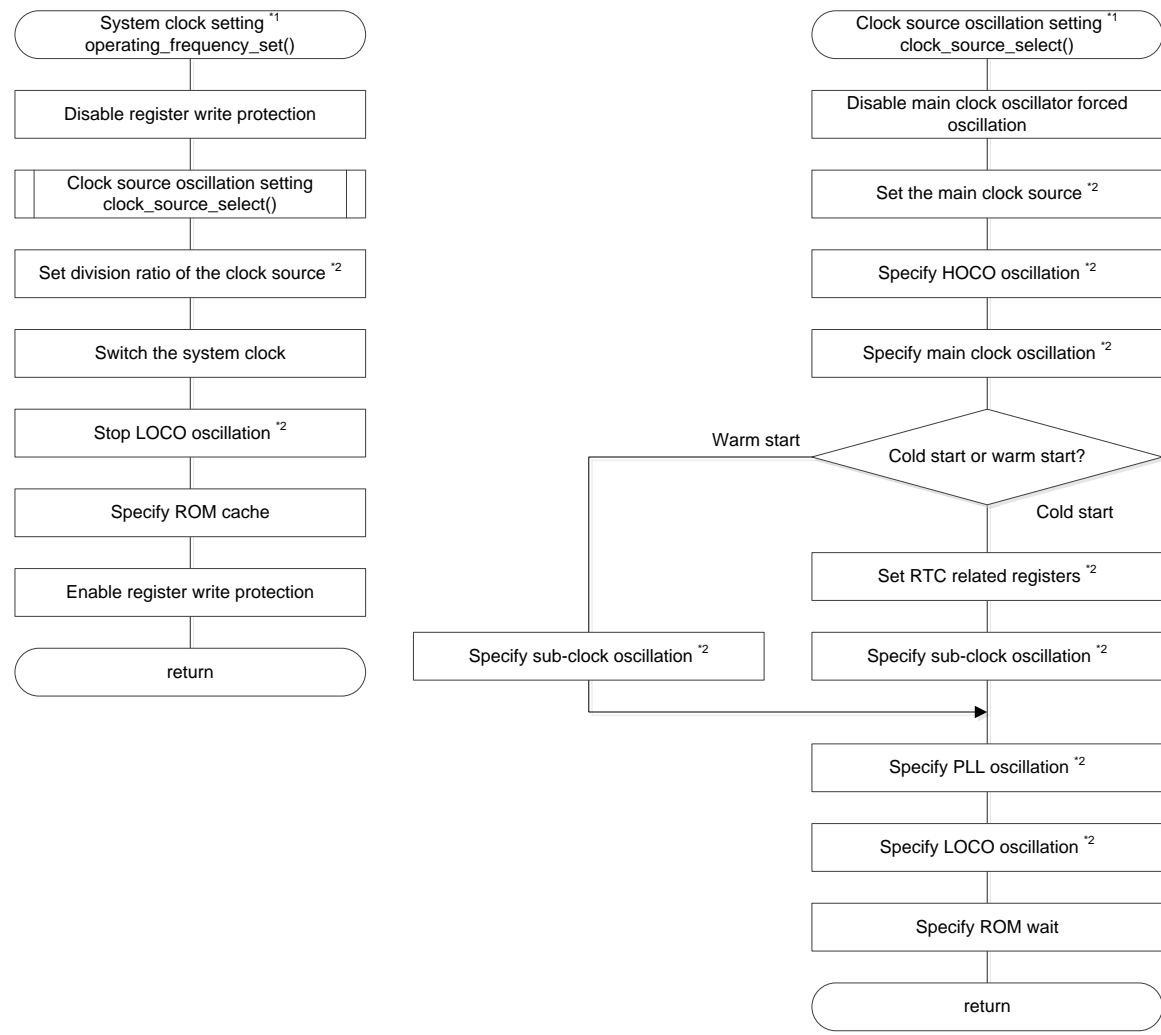

Note 1: The procedure may vary depending on the MCU used.  
Note 2: The operation varies according to settings in r\_bsp\_config.h.

Figure 2.2 Flowchart of System Clock Setting



### 2.3 Global Interrupts

---

Interrupts on RX MCUs are disabled out of reset. The `PowerON_Reset_PC()` function will enable interrupts before the user's application is called (see Section 2.2).

RX devices have two vector tables: a relocatable vector table and a fixed vector table. As the names suggest the relocatable vector table can be anywhere in memory and the fixed vector table is at a static location at the top of the memory map.

The relocatable vector table holds peripheral interrupt vectors and is pointed to by the INTB register. This register is initialized after reset in the `PowerON_Reset_PC()` function. The vectors in the relocatable vector table are inserted by the RX toolchain. The RX toolchain knows about the user's interrupt vectors by the use of the `'#pragma interrupt'` directives in the user's code.

The fixed vector table holds exception vectors, the reset vector, as well as some flash-based option registers. The fixed vector table is defined in *vecttbl.c* along with default interrupt handlers for all exceptions, the NMI interrupt, bus errors, and undefined interrupts. The user has the option of dynamically setting callbacks (see Section 2.4) for all of these vectors using the functionality found in *mcu\_interrupts.c*. The *vecttbl.c* file also takes care of setting up the User Boot reset vector when applicable.

All vectors in the fixed vector table are handled in *vecttbl.c*. All vectors in the relocatable vector table are not handled because the user will define these vectors and each application will be different. This means that in every application there will be unfilled vectors that should be taken care of in case that interrupt is triggered by accident. Many linkers support the filling of unused vectors with a static function. The `undefined_interrupt_source_isr()` function in *vecttbl.c* is provided for this purpose and the user is encouraged to setup the linker to fill in unused vectors with this function's address.

### 2.4 Interrupt Callbacks

---

The `r_bsp` provides several API functions (see Section 5.13 and 5.14) which allow the user to be alerted when certain interrupts are triggered. This works by the user selecting the interrupt and then providing a callback function. When the interrupt is triggered the `r_bsp` will call the supplied callback function.

Currently, the user can choose to register callbacks for all exception interrupts in the fixed vector table, the bus error interrupt, and the undefined interrupt. After the user callback function has been executed, the `r_bsp` interrupt handler will clear any interrupt flags as needed.

### 2.5 Non-Existent Port Pins

---

Within a MCU Group there can be many different packages with varying number of pins. For packages that have less pins than the maximum (e.g. 64 pin package in a MCU group that goes up to 144 pins), the non-bonded out pins can be initialized to lower power consumption. Based on the settings in *r\_bsp\_config.h* the `r_bsp` will automatically initialize these non-bonded out pins during the MCU initialization procedure. This feature is implemented in the *mcu\_init.c* function and is called by the `hardware_setup()` function.

### 2.6 Clock Setup

---

All system clocks are setup during `r_bsp` initialization. The clocks are configured based upon the user's settings in the *r\_bsp\_config.h* file (see Section 3.2.6). Clock configuration is performed prior to initializing the C runtime environment. This is done to quicken this process since some RX MCUs startup on a relatively slow clock (i.e. RX63x starts on 125 kHz Low-Speed On-Chip Oscillator). When selecting a clock the code in the `r_bsp` will implement the required delays to allow the selected clock to stabilize.

Some RX MCUs require a wait cycle to access the flash memory or the RAM. The wait cycle can be set by the MEMWAIT register or the ROMWT register. The setting values for these registers depend on the system clock or operating power control mode used. Make sure to confirm the limitations in the user's manual for setting the MEMWAIT register and the ROMWT register.

### 2.7 STDIO & Debug Console

---

When enabled (see Section 3.2.3), the STDIO library is initialized as part of the MCU initialization procedure. The `r_bsp` code is setup to send STDIO output to the debug console that can be viewed in HEW or e<sup>2</sup> studio. The source file `lowlvl.c` is responsible for sending and receiving bytes for STDIO functions and as previously stated is setup by default to use the debug console. If desired the user may redirect the STDIO `charget()` and/or `charput()` functions to their own respective functions by modifying `r_bsp_config.h` and enabling `BSP_CFG_USER_CHARGET_ENABLED` and/or `BSP_CFG_USER_CHARPUT_ENABLED`, and providing and replacing the `my_sw_charget_function` and/or `my_sw_charput_function` function names with the names of their own functions.

### 2.8 Stacks & Heap

---

RX MCUs have two stacks that can be used: the User stack and the Interrupt stack. When both stacks are used the User stack will be used during normal execution flow and the Interrupt stack will be used during interrupt handling. Having 2 stacks can make it easier to figure out how much stack space to allocate since the user does not have to worry about always having enough room on the User stack for if-and-when an interrupt occurs. Some users will not want 2 stacks though because it is not needed in all applications and can lead to wasted RAM (i.e. space in between stacks that is not used). If only 1 stack is used then it will always be the Interrupt stack.

The User and Interrupt stacks and the heap are all setup and initialized after reset inside of the `r_bsp` code. The sizes of the stacks and heap, and whether 1 or 2 stacks are used, is configured in `r_bsp_config.h` (see Section 3.2.2). The user also has the option of disabling the heap if desired.

### 2.9 CPU Mode

---

Out of reset, RX MCUs operate in Supervisor CPU Mode. In Supervisor Mode all CPU resources and instructions are available. The user has the option (see Section 3.2.4) of transitioning to User Mode before the `r_bsp` code jumps to `main()`. In User Mode there are restrictions to any instruction capable of writing to:

- Some bits (bits IPL[3:0], PM, U, and I) in the processor status word (PSW)
- Interrupt stack pointer (ISP)
- Interrupt table register (INTB)
- Backup PSW (BPSW)
- Backup PC (BPC)
- Fast interrupt vector register (FINTV)

If the MCU executes one of these instructions while in User Mode, an exception will trigger. If the user has a callback setup (see Section 2.4) then they will be alerted by a callback function of the exception.

### 2.10 ID Code

---

RX MCUs have a 16-byte ID Code in ROM that protects the MCU's memory from being read through a debugger, or in serial boot mode, in an attempt to extract the firmware from the device. The ID Code resides in the fixed vector table and can easily be set in `r_bsp_config.h` (see Section 0). For more information on available ID Code options please reference the ID Code subsection in the 'Flash Memory' or 'ROM' section of your MCU's hardware manual.

### 2.11 Parallel Programmer Protection

---

Similar to the ID Code, RX MCUs also have a 4-byte code in ROM that can protect access to the MCU's memory from parallel programmers. The user has the option of allowing reads and write, only allowing writes, and prohibiting all access. See Section 3.2.7 for information on how to enable this feature.

### 2.12 Endian

RX MCUs have the option of operating in big or little endian mode. Which mode is chosen is decided in different ways depending on which MCU is being used. RX610 and RX62x MCUs have a pin where the level decides. RX100, RX200, RX600 (except for RX61x, and RX62x), and RX700 MCUs have a register in ROM that decides the endian that will be used. For devices with the register in ROM, the `r_bsp` detects the endian selected in the toolchain and will use that to appropriately set the register. The `r_bsp` currently detects endian from the following toolchains:

- Renesas RXC
- IAR
- KPIT GNU

### 2.13 Option Function Select Registers

Starting with RX600 (except for RX61x, and RX62x), RX700, RX200, and RX100 MCUs, there are registers stored in ROM called Option Function Select registers. These registers are used to enable certain MCU features at reset instead of having to enable them in the user's code. Examples include the ability to enable low voltage monitoring, start the HOCO oscillating, and to configure and start the IWDG.

The user can input the values to be used for these registers in `r_bsp_config.h` (see Section 0).

### 2.14 Trusted Memory

The trusted memory (TM) function prevents illegal reading of the area set as TM. This function is disabled as default. To enable the trusted memory function, specify with the `BSP_CFG_TRUSTED_MODE_FUNCTION` definition in `r_bsp_config.h`.

For a dual-bank device, available TM area varies according to bank mode. To switch bank mode, specify with the `BSP_CFG_CODE_FLASH_BANK_MODE` definition in `r_bsp_config.h`.

### 2.15 Bank Mode

User area can be used in linear mode, which uses the user area as one area, or in dual mode, which uses the user area as dual area. These modes can be selected with the bank mode switch function. The memory mapping differs between linear mode and dual mode, and is switched depending on a mode selected. When dual mode is selected, the bank area to launch the program can be selected.

To switch bank mode, specify with the `BSP_CFG_CODE_FLASH_BANK_MODE` definition in `r_bsp_config.h`.

To select a bank to launch the program, specify with the `BSP_CFG_CODE_FLASH_START_BANK` definition in `r_bsp_config.h`.

### 2.16 Board-Specific Defines

Each *board* folder has a board-specific header file which defines things such as which pins are used for LEDs, switches, and SPI slave selects. The name of the file is the name of the board with '.h' appended. For example, the file for the RSKRX111 is named `rskrx111.h`.

### 2.17 System Wide Parameter Checking

By default FIT modules will check input parameters to be valid. This is helpful during development but some users will want to disable this for production code. The reason for this would be to save execution time and code space. In `r_bsp_config.h` there is an option to globally enable or disable parameter checking. Local modules will use this value by default but can select to override the value locally if desired. To configure this option see Section 3.2.9.

### 2.18 Atomic Locking

The `r_bsp` provides API functions to implement atomic locking. These locks can be used to protect critical areas of code as a RTOS semaphore or mutex normally would. Care should be taken when using these locks though since they do not offer the advanced features one would expect from a modern RTOS. If used incorrectly then the locks could cause a deadlock in the user's system.

In each *mcu* folder the user will find a file named `mcu_locks.h`. This contains an enum named `mcu_lock_t` which has one lock per peripheral, and peripheral channel, on the MCU. These locks can be used to mark that a peripheral has been reserved. This could be used if the user wanted to use a FIT module to control three channels of a peripheral and

their own custom code for one channel. By reserving the lock for the channel they need they have removed that channel from being used by the FIT Module. These locks can also be used if the user has more than one FIT module for the same peripheral. For example, if the user had one FIT module for using the SCI in asynchronous mode and another for using the SCI in I<sup>2</sup>C mode then these locks will prevent these two modules from trying to use the same SCI channel. There are 4 locking API functions provided that are detailed in Section 0. The only difference between the hardware and software locking functions is that the hardware locking functions only use locks that are defined in *mcu\_locks.h*. The software locking function takes locks allocated anywhere so the user could create their own as needed. FIT Modules that need locking and do not use a MCU peripheral will also create their own locks and use the software locking routines.

The user has the option of substituting the default r\_bsp locking mechanisms for their own. See Section 3.2.8 for more information.

### 2.19 Register Protection

RX100, RX200, RX600 (except for RX61x, and RX62x), and RX700 MCUs have protect registers that protect various MCU registers from being written. Examples of registers that are protected include clock registers, low power consumption registers, the software reset register, and low voltage detection registers. The r\_bsp provides API functions for easily manipulating these registers to enable or disable write access. Refer to Sections 5.7 and 5.8 for more information.

### 2.20 CPU Functions

API functions are provided for CPU functions such as enabling and disabling interrupts and setting the CPU's interrupt priority level. Refer to Section 5 for more information.

### 2.21 Group Interrupts

Multiple peripheral interrupt requests (up to 32 requests) are grouped together as one interrupt request. Interrupts are grouped depending on the peripheral operating clock (PCLKB or PCLKA) and method to detect interrupt requests (edge detection or level detection).

When the group interrupt request is generated, checking the corresponding group interrupt request register (A or B, edge or level) identifies the interrupt source.

Figure 2-3 shows the Overview of FIT Group Interrupts.

With the BSP group interrupt function, when an interrupt occurs, the preregistered function is called. The registration is done by each peripheral FIT module using the R\_BSP\_InterruptWrite function.

1. Each peripheral FIT module registers the interrupt callback function by calling the R\_BSP\_InterruptWrite function.
2. When an interrupt occurs, the FIT module calls the callback function registered in 1 above.

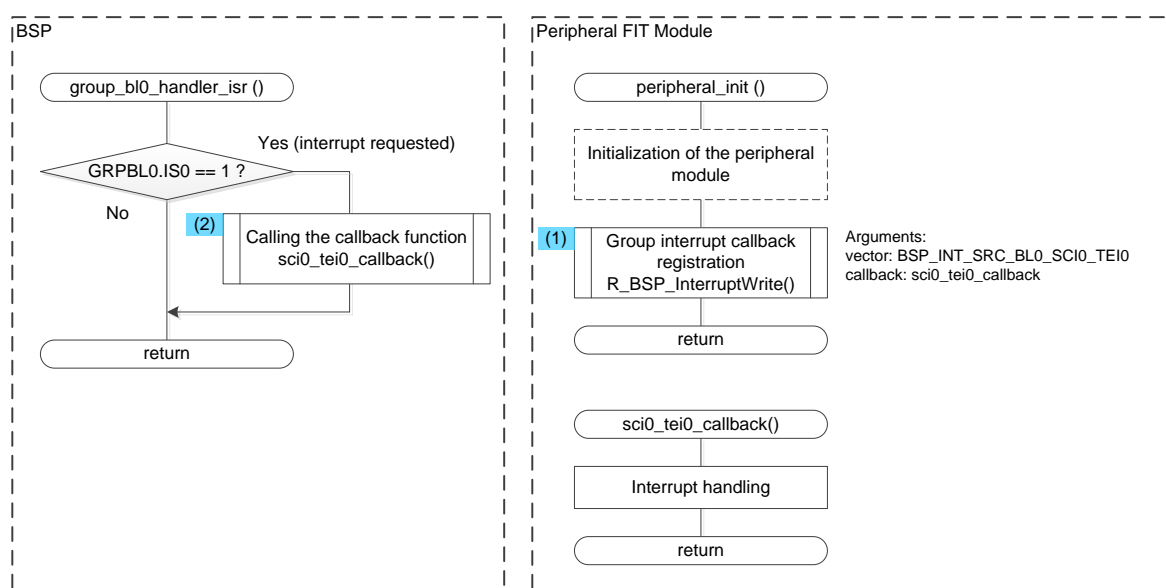


Figure 2.3 Overview of FIT Group Interrupts

## 2.22 Software Configurable Interrupts

Peripheral interrupt sources can be dynamically assigned to a vector number from 128 to 255. Based on the peripheral operating clock, they are divided into software configurable interrupt A and software configurable interrupt B. Software configurable interrupt B may be used for peripherals that operate in synchronization with PCLKB and can be assigned to interrupt numbers 128 to 207. Software configurable interrupt A may be used for peripherals that operate in synchronization with PCLKA and can be assigned to interrupt numbers 208 to 255.

## 2.23 Startup Disable

The startup disable function is the function for the user who wants to add the peripheral FIT module to the existing user project without creating a new project.

When the startup disable function is enabled, all startup processing performed by the BSP (processing in the PowerON\_Reset\_PC function) become disabled. This prevents conflict with the user created startup processing. Figure 2-4 shows the Overview of the Startup Disable Function, Figure 2-5 shows the Processing Disabled with the Startup Disable Function, and Figure 2-6 shows the Files Influenced by the Startup Disable Function.

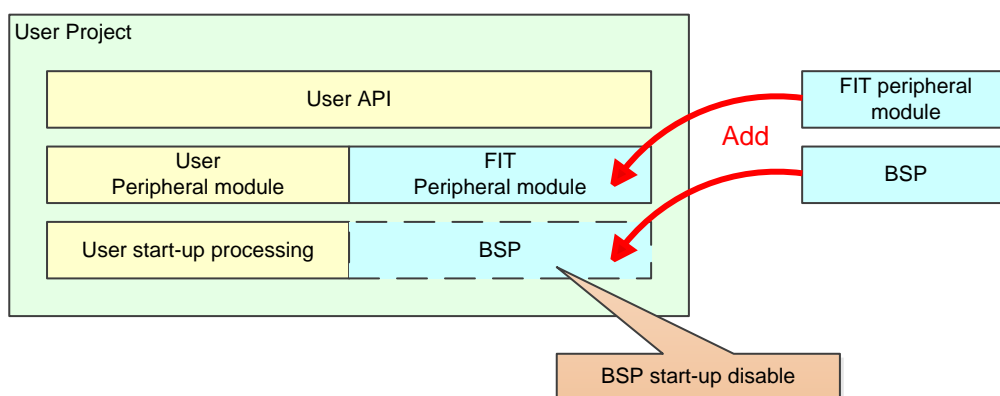


Figure 2.4 Overview of the Startup Disable Function




Note 1: The MCU skips this procedure.

Note 2: The operation varies depending on the setting in the r\_bsp\_config.h.

**Figure 2.5 Processing Disabled with the Startup Disable Function**

\* Files whose code is completely disabled with the startup disable function.

\* File whose code is partially disabled with the startup disable function.

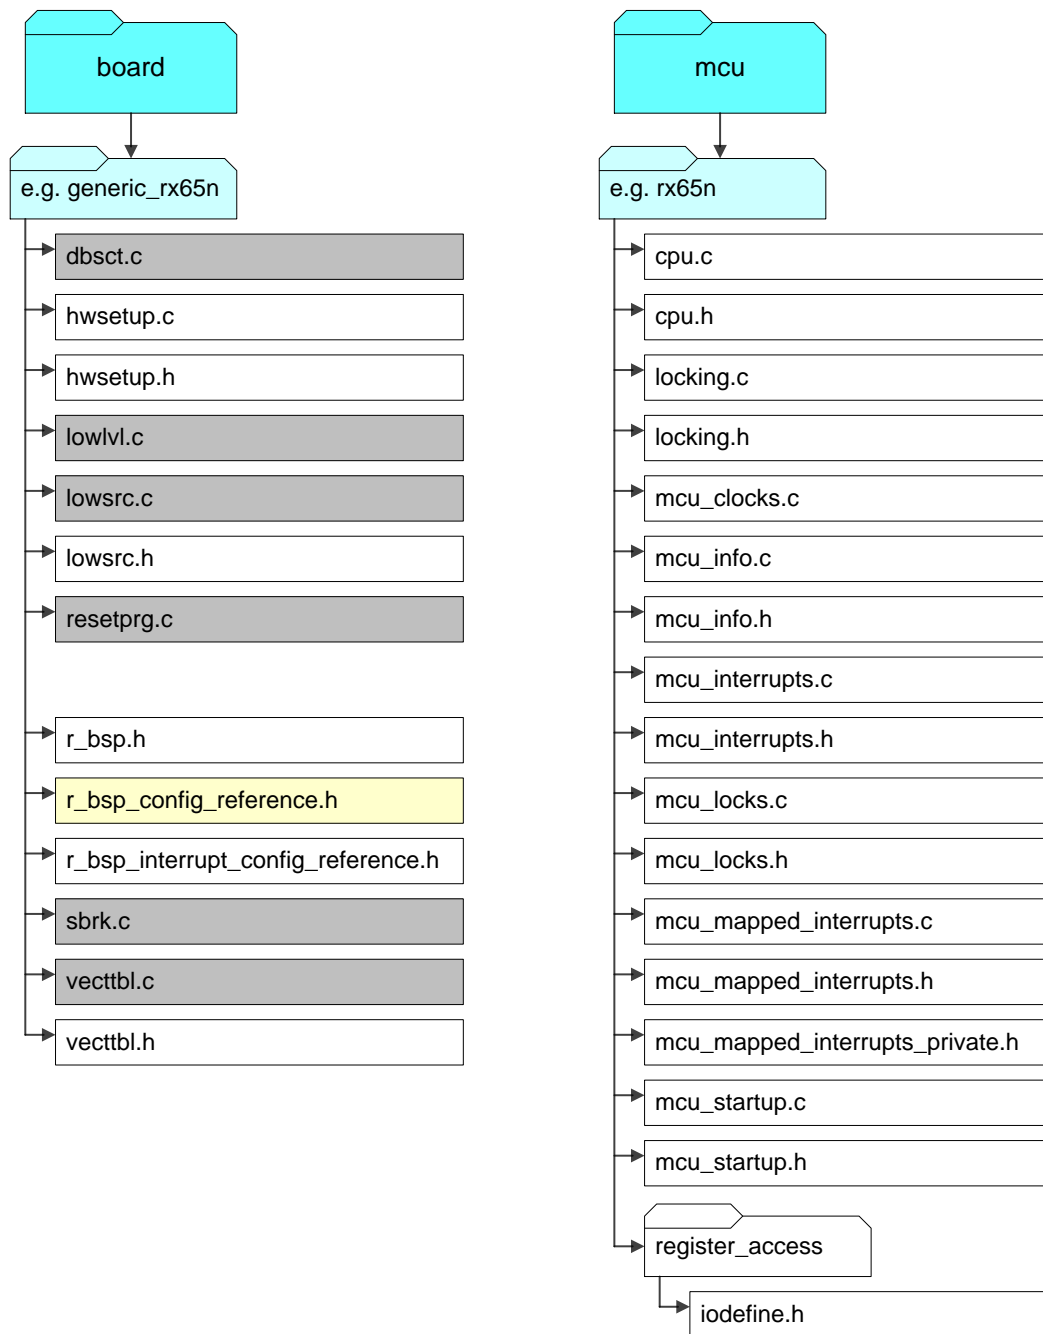

**Figure 2.6 Files Influenced by the Startup Disable Function**

## 2.23.1 Setting the Startup Disable Function

To disable the BSP startup processing, specify the setting described below. For how to implement the FIT module, refer to “8 Adding FIT Modules to the User Project”.

### (1) Setting the configuration file


Disable the BSP startup processing by setting `BSP_CFG_STARTUP_DISABLE` to 1 in the `r_bsp_config.h` of the BSP.

Set the user created startup processing in the `r_bsp_config.h`. BSP API functions and peripheral FIT modules refer to the contents in the `r_bsp_config.h`. If the contents of the user startup processing and the BSP startup processing are different, the FIT module does not operate correctly.

Here is an example when `mcu_info.h` of the BSP has the definition of the peripheral module clock B frequency (`BSP_PCLKB_HZ`). The frequency of peripheral module clock B is calculated with the information (frequency of the resonator, division ratio, multiplication factor, and so on) set in `r_bsp_config.h`. The calculated frequency of peripheral module clock B is referred by peripheral FIT modules.

The BSP information to which FIT modules refer is generated from `r_bsp_config.h`. Therefore, the settings in the user startup processing and settings in `r_bsp_config.h` must be the same.

Figure 2-7 shows Configuration File Settings.

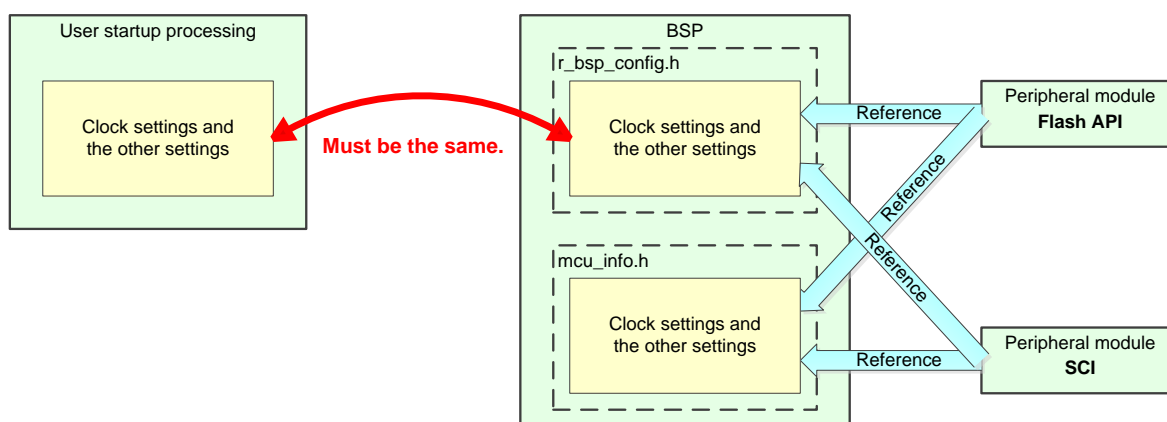

**Figure 2.7 Configuration File Settings**

### (2) Setting for the conflicted group interrupt function

The BSP uses the group interrupt function. The function cannot be disabled since the peripheral FIT module uses it. To avoid confliction, use the group interrupt function of the BSP instead of user's group interrupt function.

For group interrupts of the FIT module, refer to 2.21 Group Interrupts.

### (3) Calling the `R_BSP_StartupOpen` function

The `R_BSP_StartupOpen` function performs initialization for the interrupt callback, register protection, and the hardware and pins. These processing are for using the BSP and peripheral FIT modules. Thus, the `R_BSP_StartupOpen` function must be called in the beginning of the user main function.

Refer to “5.18 `R_BSP_StartupOpen()`” for the `R_BSP_StartupOpen` function.



### 3. Configuration

The `r_bsp` provides two header files that are used for configuration. One header file is used for choosing which platform will be used. The other header file is used to configure the chosen platform.

#### 3.1 Choosing a Platform

The `r_bsp` provides board support packages for many boards. Choosing which one is currently being used is done by modifying the `platform.h` header file found in the root of the `r_bsp` folder.

To choose a platform uncomment the `#include` for the board you are using. For example, to develop with a RSK+RX63N board, uncomment the `#include` for `'./board/rskrx63n/r_bsp.h'` macro and make sure all other board `#includes` are commented out.

```

/*****
DEFINE YOUR SYSTEM - UNCOMMENT THE INCLUDE PATH FOR THE PLATFORM YOU ARE USING.
*****/
/* RSKRX610 */
//#include "./board/rskrx610/r_bsp.h"

/* RSKRX62N */
//#include "./board/rskrx62n/r_bsp.h"

/* RSKRX62T */
//#include "./board/rskrx62t/r_bsp.h"

/* RDKRX62N */
//#include "./board/rdkrx62n/r_bsp.h"

/* RSKRX630 */
//#include "./board/rskrx630/r_bsp.h"

/* RSKRX63N */
#include "./board/rskrx63n/r_bsp.h"

```

#### 3.2 Platform Configuration

Once a platform has been chosen, it will need to be configured. The user configures their platform using a file named `r_bsp_config.h`. Each platform has its own specific configuration file. This file is located in the platform's `board` folder and is named `r_bsp_config_reference.h`. To create an `r_bsp_config.h` file the user simply needs to copy the `r_bsp_config_reference.h` file from their `board` folder, rename it to `r_bsp_config.h`, and put it somewhere in their project where it can be included. The reference configuration file is provided so that users always have a known-good configuration file if needed. It is recommended that the `r_bsp_config.h` file is stored in a folder named `r_config` in the user's project. This is not a requirement but all FIT Modules have configuration files and having one designated location for these files makes them easy to find and easy to backup.

While each `r_bsp_config.h` file is different, there are many of the same options in each. The following sections will provide details on these configuration options. Note that each macro starts with the common prefix `'BSP_CFG_'` which makes them easy to search for and easy for the user to identify.

When using Smart Configurator, the configuration option can be set on software component configuration screen. The setting value is automatically reflected in `r_bsp_config.h` when adding modules to user project.

### 3.2.1 MCU Product Part Number Information

The product part number for a MCU can provide the `r_bsp` with a lot of information about a MCU. For this reason, the beginning of the configuration file has definitions that are set based on the MCU's product part number. All of these macros have a prefix of 'BSP\_CFG\_MCU\_PART\_'. Some MCUs have more information in their product part numbers than others but the table below shows the standard set that most have.

**Table 3.1 Product Part Number Defines**

Define	Value	Meaning
<b>BSP_CFG_MCU_PART_PACKAGE</b>	See comments above #define in <code>r_bsp_config.h</code> .	Defines which package is being used. Depending on package sizes MCUs will have different numbers of pins and may have more or less peripherals.
<b>BSP_CFG_MCU_PART_MEMORY_SIZE</b>	See comments above #define in <code>r_bsp_config.h</code> .	Defines the sizes of ROM, RAM, and Data Flash.
<b>BSP_CFG_MCU_PART_GROUP</b>	See comments above #define in <code>r_bsp_config.h</code> .	Defines the MCU Group (e.g. RX62N, RX63T) in a MCU series.
<b>BSP_CFG_MCU_PART_SERIES</b>	See comments above #define in <code>r_bsp_config.h</code> .	Defines the MCU Series (e.g. RX600, RX200, RX100).

### 3.2.2 Stack & Heap Sizes

Stack sizes for RX devices are defined using the `#pragma` directives for the RX toolchain.

**Table 3.2 Stack & Heap Defines (1/2)**

Define	Value	Meaning
<b>BSP_CFG_USER_STACK_ENABLE</b>	0 = Use only Interrupt stack. 1 = Use Interrupt & User stacks.	Whether to use 1 stack (Interrupt stack) or 2 (Interrupt & User stack). For further explanation please see Section 2.8.
<b>#pragma stacksize su=</b>	Size of User Stack in bytes.	Defines the size of the User stack. This macro may be hidden from view if the user has code folding enabled in their editor.
<b>#pragma stacksize si=</b>	Size of Interrupt Stack in bytes.	Defines the size of the Interrupt stack. This macro may be hidden from view if the user has code folding enabled in their editor.

**Table 3.2 Stack & Heap Defines (2/2)**

Define	Value	Meaning
<b>BSP_CFG_HEAP_BYTES</b>	Size of heap in bytes.	Defines the size of the heap. To disable heap please read the comments above this #define.

## 3.2.3 STDIO & Debug Console

The use of the STDIO library requires extra code space, RAM space, and use of the heap. If the user does not require the use of STDIO then it is recommended to disable it and save the extra memory.

**Table 3.3 STDIO & Debug Console Defines**

Define	Value	Meaning
<b>BSP_CFG_IO_LIB_ENABLE</b>	0 = Disable use of STDIO 1 = Enable use of STDIO	Determines whether STDIO initialization functions are called at startup to setup the STDIO libraries.
<b>BSP_CFG_USER_CHARGET_ENABLED</b>	0 = User function is not called by charget function 1 = Specified user function is called by charget function.	Defines whether or not to redirect the charget function.
<b>BSP_CFG_USER_CHARGET_FUNCTION</b>	Function redirected to by charget function.	Defines the function to be called when the charget function is redirected.
<b>BSP_CFG_USER_CHARPUT_ENABLED</b>	0 = User function is not called by charput function 1 = Specified user function is called by charput function.	Defines whether or not to redirect the charput function.
<b>BSP_CFG_USER_CHARPUT_FUNCTION</b>	Function redirected to by charput function.	Defines the function to be called when the charput function is redirected.

## 3.2.4 CPU Modes & Boot Modes

RX MCUs have multiple boot modes including Serial Boot Mode, User Boot Mode, and Single-Chip Mode. The method for selecting boot mode varies depending on the MCU used. Some MCU select boot mode according to the level of a target pin at startup, and some others select boot mode by setting a pin and also setting a value (UB code) to the ROM.

**Table 3.4 CPU Modes & Boot Modes Defines**

Define	Value	Meaning
<b>BSP_CFG_RUN_IN_USER_MODE</b>	0 = Stay in Supervisor Mode 1 = Transition to User Mode	Out of reset RX MCUs operate in Supervisor Mode. The user has the option of transitioning to User Mode (which has limited write access to certain registers). Unless needed it is recommended to keep the MCU in Supervisor mode.
<b>BSP_CFG_USER_BOOT_ENABLE</b>	0 = Disable User Boot Mode 1 = Enable User Boot Mode	To enter User Boot Mode, a value in ROM must be set. If this macro defines User Boot Mode to be enabled then the <code>r_bsp</code> will set the appropriate ROM value.

## 3.2.5 RTOS

**Table 3.5 RTOS Defines**

Define	Value	Meaning
<b>BSP_CFG_RTOS_USED</b>	0 = RTOS is not being used 1 = RTOS is being used	Defines if a RTOS is being used in the current application. Some FIT modules may use this information for their own configuration.
<b>BSP_CFG_RTOS_SYSTEM_TIMER</b>	0 = CMT channel 0 1 = CMT channel 1 2 = CMT channel 2 3 = CMT channel 3	Defines the channel of CMT used for RTOS system timer. If the RTOS is not used then this definition is disabled.

## 3.2.6 Clock Setup

Available clocks vary amongst RX MCUs but the same basic concepts apply to all. After reset the `r_bsp` will initialize the MCU clocks using the clock configuration macros found in `r_bsp_config.h`.

**Table 3.6 Clock Setup Defines (1/2)**

Define	Value	Meaning
<b>BSP_CFG_CLOCK_SOURCE</b>	0 = Low Speed On-Chip Oscillator (LOCO) 1 = High Speed On-Chip Oscillator (HOCO) 2 = Main Clock Oscillator 3 = Sub-Clock Oscillator 4 = PLL Circuit	Defines which clock source will be in use when the <code>r_bsp</code> code jumps to <code>main()</code> .
<b>BSP_CFG_MAIN_CLOCK_SOURCE</b>	0 = Resonator 1 = External clock input	Defines which clock source will be used for the main clock oscillator.
<b>BSP_CFG_RTC_ENABLE</b>	0 = RTC is not used 1 = RTC is used	Defines whether to use the RTC or not.
<b>BSP_CFG_SOSC_DRV_CAP</b>	See the comment above #define in <code>r_bsp_config.h</code> .	Defines the driving ability of the sub-clock oscillator.
<b>BSP_CFG_PLL_SCR</b>	0 = Main clock 1 = HOCO	Defines which clock source will be used for the PLL Circuit.
<b>BSP_CFG_USB_CLOCK_SOURCE</b>	0 = System Clock (ICLK) 1 = USB PLL Circuit	Defines which clock source will be used when the USB peripheral is enabled.
<b>BSP_CFG_LCD_CLOCK_SOURCE</b>	0 = Low Speed On-Chip Oscillator (LOCO) 1 = High Speed On-Chip Oscillator (HOCO) 2 = Main Clock Oscillator 3 = Sub-Clock Oscillator 4 = IWDG dedicated clock (IWDGCLK)	Defines which clock source will be used when LCD is enabled.
<b>BSP_CFG_LCD_CLOCK_ENABLE</b>	0 = LCD Source clock is disabled 1 = LCD Source clock is enabled	Defines if clock source to the LCD is enabled.
<b>BSP_CFG_HOCO_FREQUENCY</b>	See the comment above #define in <code>r_bsp_config.h</code> .	Defines the HOCO frequency.
<b>BSP_CFG_LPT_CLOCK_SOURCE</b>	0 = Sub-Clock 1 = IWDG dedicated clock 2 = LPT not used	Defines which clock source will be used when the Low-Power Timer is enabled. The default value is 2 (LPT not used).

**Table 3.6 Clock Setup Defines (2/2)**

Define	Value	Meaning
<b>BSP_CFG_XTAL_HZ</b>	Input clock frequency in Hz.	Defines the input clock frequency (Resonator or External oscillator). This is used for calculating final clock speeds.
<b>BSP_CFG_PLL_DIV</b>	PLL Input Frequency Divider	Defines the PLL divider to be used. If the PLL is not used then this can be ignored.
<b>BSP_CFG_PLL_MUL</b>	PLL Frequency Multiplication Factor	Defines the PLL multiplier to be used. If the PLL is not used then this can be ignored.
<b>BSP_CFG_UPLL_DIV</b>	USB PLL Input Frequency Divider	Defines the USB PLL divider to be used. If the PLL is not used then this can be ignored.
<b>BSP_CFG_UPLL_MUL</b>	USB PLL Frequency Multiplication Factor	Defines the USB PLL multiplier to be used. If the PLL is not used then this can be ignored.
<b>BSP_CFG_&lt;ClockAcronym&gt;_DIV</b> <b>Examples:</b> <b>BSP_CFG_ICK_DIV</b> <b>BSP_CFG_PCKA_DIV</b> <b>BSP_CFG_PCKB_DIV</b> <b>BSP_CFG_PCKD_DIV</b> <b>BSP_CFG_FCK_DIV</b>	The divisor to use for this clock.	RX MCUs have a number of clock domains on-chip. Dividers can be set for each of these independently to maximize performance while minimizing power consumption. <ClockAcronym> is a placeholder for the name of the clock to be set. For example to set the divider for the CPU clock (ICK) then the user would set the BSP_CFG_ICK_DIV macro.
<b>BSP_CFG_HOCO_WAIT_TIME</b>	HOSCWTCR register setting value	Defines the high-speed on-chip oscillator wait time.
<b>BSP_CFG_MOSC_WAIT_TIME</b>	MOSCWTCR register setting value	Defines the main clock oscillator wait time.
<b>BSP_CFG_SOSC_WAIT_TIME</b>	SOSCWTCR register setting value	Defines the sub-clock oscillator wait time.
<b>BSP_CFG_BCLK_OUTPUT</b>	0 = BCLK is not output 1 = BCK frequency is output 2 = BCK/2 frequency is output	Defines if BCLK is output and if so what frequency is output.
<b>BSP_CFG_SDCLK_OUTPUT</b>	0 = SDCLK is not output 1 = BCK frequency is output	Defines if SDCLK is output.
<b>BSP_CFG_USE_CGC_MODULE</b>	0 = Use built-in clock code in the r_bsp module	Allows to set 0 only.

## 3.2.7 Registers in ROM & External Memory Access Protection

Some registers are located in ROM and therefore must be set at compile-time. These include some option-setting memory registers as well as certain memory protection registers.

RX MCUs have 2 different mechanisms for protecting MCU memory from being read after production. The first is the use of ID codes. The RX ID code is 16 byte value that can be used to protect the MCU from being connected to a debugger or from connecting in Serial Boot Mode. There are different settings that can be set for the ID code; please refer to the hardware manual for your device for available options. The second mechanism is a 4 byte value called ROM Code Protection. This value determines what read and write access parallel programmers have to the MCU.

Option-Setting Memory registers (i.e. OFS0, OFS1) can be set so that certain operations occur at reset. For example, the IWDG can be configured and enabled, voltage detection can be enabled, and HOCO oscillation can be enabled. When these registers are set the operations are completed before the MCU's reset vector is fetched and execution begins.

**Table 3.7 ROM Register Defines (1/2)**

Define	Value	Meaning
<b>BSP_CFG_ID_CODE_LONG_1</b> <b>BSP_CFG_ID_CODE_LONG_2</b> <b>BSP_CFG_ID_CODE_LONG_3</b> <b>BSP_CFG_ID_CODE_LONG_4</b>	ID code setting in 4 byte units.	Defines the ID code of the MCU. The default value all 0xFF's means that protection is disabled. <b>Note:</b> if the ID code is set then it should be remembered because the code will be required if the MCU is going to be connected for debugging or in Serial Boot Mode again.
<b>BSP_CFG_ROM_CODE_PROTECT_VALUE</b>	0 = Read/Write access is disabled 1 = Read access is disabled Else = Read/Write access is enabled	Defines the read and write access allowed by parallel programmers.
<b>BSP_CFG_OFS0_REG_VALUE</b>	Value to be written to OFS0 register.	Defines the 4-byte value to be programmed into the OFS0 ROM location.
<b>BSP_CFG_OFS1_REG_VALUE</b>	Value to be written to OFS1 register.	Defines the 4-byte value to be programmed into the OFS1 ROM location. When HOCO oscillation is enabled, set the default value to BSP_CFG_HOCO_FREQUENCY.
<b>BSP_CFG_TRUSTED_MODE_FUNCTION</b>	Value to be written to TMEF register.	Defines if Trusted Mode is enabled or disabled for RX64M, RX65N and RX71M MCU's.

**Table 3.7 ROM Register Defines (2/2)**

Define	Value	Meaning
<b>BSP_CFG_FAW_REG_VALUE</b>	Value to be written to FAW register.	In RX65N MCU, defines the 4-byte value to be programmed into the FAW ROM location.
<b>BSP_CFG_ROMCODE_REG_VALUE</b>	Value to be written to ROMCODE register.	In RX65N MCU, defines the 4-byte value to be programmed into the ROMCODE ROM location.
<b>BSP_CFG_CODE_FLASH_BANK_MODE</b>	0 = Dual mode 1 = Linear mode	Defines bank mode for a dual-bank device.
<b>BSP_CFG_CODE_FLASH_START_BANK</b>	0 = Launch from bank 0 1 = Launch from bank 1	Defines a bank to launch the program in dual mode for a dual-bank device.  This definition is disabled for linear mode.

## 3.2.8 Atomic Locking

For an introduction into the `r_bsp`'s atomic locking see 2.18. These macros allow the user to override the default locking mechanisms and implement their own. A user might wish to do this in order to replace the simple default mechanisms provided in the `r_bsp` with more feature rich objects such as semaphores or mutexes from their RTOS. If the user wished to do this they would first configure the `r_bsp` to use user defined locking mechanisms (see `BSP_CFG_USER_LOCKING_ENABLED` below). After that they would define `BSP_CFG_USER_LOCKING_TYPE` to be the type they wished to use for their locks. If using an RTOS semaphore then its type would be used here. Finally the user would need to define the four locking functions that would be used (see last 4 entries in table below). The arguments to these user defined functions have to match the arguments sent to the default locking functions. After these changes are made all locks in the user's project would be converted to the user defined locks. Whenever the `r_bsp` lock functions are called by user code, or FIT Module code, the user's functions would be called. At this point the user is responsible for implementing the locking features. Inside these functions the user would be free to use the more advanced locking features of their RTOS.

**Table 3.8 Atomic Locking Defines (1/2)**

Define	Value	Meaning
<b>BSP_CFG_USER_LOCKING_ENABLED</b>	0 = Use default locking mechanisms 1 = Use user defined locking mechanisms	The default locking mechanisms provided with the <code>r_bsp</code> do not use an RTOS and therefore do not offer some of the advanced features that a user might expect from an RTOS when using a semaphore or mutex.



Table 3.8 Atomic Locking Defines (2/2)

Define	Value	Meaning
<b>BSP_CFG_USER_LOCKING_TYPE</b>	Data type to be used for locks (default is <i>bsp_lock_t</i> )	If the user decides to use their own locking mechanism then the data type for their locks should be defined here. For example, if the user replaces the default locks with an RTOS semaphore or mutex then that data type would be specified here.
<b>BSP_CFG_USER_LOCKING_HW_LOCK_FUNCTION</b>	User defined functions to be called when <i>r_bsp</i> lock functions are overridden by user.	If the user is using their own locking mechanisms then the function defined by this macro will be called when <i>R_BSP_HardwareLock()</i> is called.
<b>BSP_CFG_USER_LOCKING_HW_UNLOCK_FUNCTION</b>	User defined functions to be called when <i>r_bsp</i> lock functions are overridden by user.	If the user is using their own locking mechanisms then the function defined by this macro will be called when <i>R_BSP_HardwareUnlock()</i> is called.
<b>BSP_CFG_USER_LOCKING_SW_LOCK_FUNCTION</b>	User defined functions to be called when <i>r_bsp</i> lock functions are overridden by user.	If the user is using their own locking mechanisms then the function defined by this macro will be called when <i>R_BSP_SoftwareLock()</i> is called.
<b>BSP_CFG_USER_LOCKING_SW_UNLOCK_FUNCTION</b>	User defined functions to be called when <i>r_bsp</i> lock functions are overridden by user.	If the user is using their own locking mechanisms then the function defined by this macro will be called when <i>R_BSP_SoftwareUnlock()</i> is called.

## 3.2.9 Parameter Checking

This macro is a global setting for enabling or disabling parameter checking. Each FIT module will also have its own local macro for this same purpose. By default the local macros will take the global value from here though they can be overridden. Therefore, the local setting has priority over this global setting. Disabling parameter checking should only be performed when inputs are known to be good and the increase in speed or decrease in code space is needed.

**Table 3.9 Parameter Checking Defines**

Define	Value	Meaning
<b>BSP_CFG_PARAM_CHECKING_ENABLE</b>	0 = Parameter checking disabled 1 = Parameter checking enabled	Defines whether the global setting for parameter checking is enabled or disabled. Local modules will take this value by default but can be locally overridden.

## 3.2.10 Extended Bus Master Priority Setting

**Table 3.10 Extended Bus Master Priority Setting Defines**

Define	Value	Meaning
<b>BSP_CFG_EBMAPCR_1ST_PRIORITY</b>	0 = GLCDC graphics 1 data read	Extended Bus Master 1st Priority Selection.
<b>BSP_CFG_EBMAPCR_2ND_PRIORITY</b>	1 = DRW2D texture data read 2 = DRW2D frame buffer data read write and display list data read	Extended Bus Master 2nd Priority Selection.
<b>BSP_CFG_EBMAPCR_3RD_PRIORITY</b>	3 = GLCDC graphics 2 data read 4 = EDMAC	Extended Bus Master 3rd Priority Selection.
<b>BSP_CFG_EBMAPCR_4TH_PRIORITY</b>	Settings other than above are prohibited. Also, it is not possible to set the same value for multiple priorities.	Extended Bus Master 4th Priority Selection.
<b>BSP_CFG_EBMAPCR_5TH_PRIORITY</b>		Extended Bus Master 5th Priority Selection.

**3.2.11 MCU Voltage**

These macros set the voltage (Vcc) and the analog voltage (AVcc) supplied to the MCU by the system. Each FIT module obtains the voltage and analog voltage supplied to the MCU by referencing these macros. Specify values appropriate for the user system.

**Table 3.11 MCU Voltage Defines**

Define	Value	Meaning
<b>BSP_CFG_MCU_VCC_MV</b>	Voltage supplied to MCU (Vcc) in millivolts.	Some FIT Modules (e.g. LVD) need to know the voltage supplied to the MCU. The voltage information can be obtained from this definition.
<b>BSP_CFG_MCU_AVCC_MV</b>	Analog voltage supplied to MCU (AVcc) in millivolts.	Some FIT Modules (e.g. AD) need to know the analog voltage supplied to the MCU. The analog voltage information can be obtained from this definition.

**3.2.12 Startup Disable****Table 3-12 Startup Disable Defines**

Define	Value	Meaning
<b>BSP_CFG_STARTUP_DISABLE</b>	0 = BSP startup enable 1 = BSP startup disable	Defines the BSP startup processing to be enabled or disabled. When setting to be disabled, all startup processing performed by the BSP is disabled.

**3.2.13 Using Smart Configurator****Table 3.13 Using Smart Configurator Defines**

Define	Value	Meaning
<b>BSP_CFG_CONFIGURATOR_SELECT</b>	0 = Do not use Smart Configurator 1 = Use Smart Configurator	Define whether Smart Configurator will be used in the current project. When BSP_CFG_CONFIGURATOR_SELECT = 1, The Smart Configurator initialization function is called.

## 3.2.14 Negative Voltage Input Settings for AD Pins

These macros specify whether negative voltage is input to pins AN000, AN001, AN002, AN100, AN101, AN102, PGAVSS0, and PGAVSS1 of the AD. Some FIT modules (such as the AD module) need to know whether to apply negative voltage to the input pins of the PGA when using PGA pseudo-differential input. Each FIT module obtains the negative voltage input settings of the AD pins by referencing these macros. Set values appropriate for the user system. These macros have no effect if the package of the product has no PGA differential inputs.

**Table 3.14 Definitions of Negative Voltage Input Settings for AD Pins (1/2)**

Definition	Value	Description
<b>BSP_CFG_AD_NEGATIVE_VOLTAGE _INPUT_AN000</b>	0 = Negative voltage is not to be input to the pin. 1 = Negative voltage is to be input to the pin.	Defines whether negative voltage is input to the AN000 pin of AD.
<b>BSP_CFG_AD_NEGATIVE_VOLTAGE _INPUT_AN001</b>	0 = Negative voltage is not to be input to the pin. 1 = Negative voltage is to be input to the pin.	Defines whether negative voltage is input to the AN001 pin of AD.
<b>BSP_CFG_AD_NEGATIVE_VOLTAGE _INPUT_AN002</b>	0 = Negative voltage is not to be input to the pin. 1 = Negative voltage is to be input to the pin.	Defines whether negative voltage is input to the AN002 pin of AD.
<b>BSP_CFG_AD_NEGATIVE_VOLTAGE _INPUT_PGAVSS0</b>	0 = Negative voltage is not to be input to the pin. 1 = Negative voltage is to be input to the pin.	Defines whether negative voltage is input to the PGAVSS0 pin of AD.

**Table 3.14 Definitions of Negative Voltage Input Settings for AD Pins (2/2)**

Definition	Value	Description
<b>BSP_CFG_AD_NEGATIVE_VOLTAGE _INPUT_AN100</b>	0 = Negative voltage is not to be input to the pin. 1 = Negative voltage is to be input to the pin.	Defines whether negative voltage is input to the AN100 pin of AD.
<b>BSP_CFG_AD_NEGATIVE_VOLTAGE _INPUT_AN101</b>	0 = Negative voltage is not to be input to the pin. 1 = Negative voltage is to be input to the pin.	Defines whether negative voltage is input to the AN101 pin of AD.
<b>BSP_CFG_AD_NEGATIVE_VOLTAGE _INPUT_AN102</b>	0 = Negative voltage is not to be input to the pin. 1 = Negative voltage is to be input to the pin.	Defines whether negative voltage is input to the AN102 pin of AD.
<b>BSP_CFG_AD_NEGATIVE_VOLTAGE _INPUT_PGAVSS1</b>	0 = Negative voltage is not to be input to the pin. 1 = Negative voltage is to be input to the pin.	Defines whether negative voltage is input to the PGAVSS1 pin of AD.

## 3.2.15 ROM Cache Function

Some RX MCUs have a ROM cache function. After a reset `r_bsp` initializes the ROM cache settings of the MCU using the ROM cache configuration macros found in `r_bsp_config.h`.

**Table 3.15 ROM Cache Setting Definitions (1/2)**

Definition	Value	Description
<b>BSP_CFG_ROM_CACHE_ENABLE</b>	0 = ROM cache operation disabled. 1 = ROM cache operation enabled.	Defines whether ROM cache operation is enabled or disabled.
<b>BSP_CFG_NONCACHEABLE_AREA0_ENABLE</b>	0 = Non-cacheable area 0 settings disabled. 1 = Non-cacheable area 0 settings enabled.	Defines whether non-cacheable area 0 is enabled or disabled when ROM cache operation is enabled.
<b>BSP_CFG_NONCACHEABLE_AREA0_ADDR</b>	Setting value of NCRG0 register	Defines the start address of non-cacheable area 0.
<b>BSP_CFG_NONCACHEABLE_AREA0_SIZE</b>	See comments above #define in <code>r_bsp_config.h</code> .	Defines the size of non-cacheable area 0.
<b>BSP_CFG_NONCACHEABLE_AREA0_IF_ENABLE</b>	0 = Non-cacheable area 0 setting of IF cache disabled. 1 = Non-cacheable area 0 setting of IF cache enabled.	Defines whether the non-cacheable area for the IF cache is enabled or disabled when ROM cache operation is enabled and non-cacheable area 0 is enabled.
<b>BSP_CFG_NONCACHEABLE_AREA0_OA_ENABLE</b>	0 = Non-cacheable area 0 setting of OA cache disabled. 1 = Non-cacheable area 0 setting of OA cache enabled.	Defines whether the non-cacheable area for the OA cache is enabled or disabled when ROM cache operation is enabled and non-cacheable area 0 is enabled.
<b>BSP_CFG_NONCACHEABLE_AREA0_DM_ENABLE</b>	0 = Non-cacheable area 0 setting of DM cache disabled. 1 = Non-cacheable area 0 setting of DM cache enabled.	Defines whether the non-cacheable area for the DM cache is enabled or disabled when ROM cache operation is enabled and non-cacheable area 0 is enabled.

Table 3.15 ROM Cache Setting Definitions (2/2)

Definition	Value	Description
<b>BSP_CFG_NONCACHEABLE_AREA1_ENABLE</b>	0 = Non-cacheable area 1 settings disabled. 1 = Non-cacheable area 1 settings enabled.	Defines whether non-cacheable area 1 is enabled or disabled when ROM cache operation is enabled.
<b>BSP_CFG_NONCACHEABLE_AREA1_ADDR</b>	Setting value of NCRG1 register	Defines the start address of non-cacheable area 1.
<b>BSP_CFG_NONCACHEABLE_AREA1_SIZE</b>	See comments above #define in r_bsp_config.h.	Defines the size of non-cacheable area 1.
<b>BSP_CFG_NONCACHEABLE_AREA1_IF_ENABLE</b>	0 = Non-cacheable area 1 setting of IF cache disabled. 1 = Non-cacheable area 1 setting of IF cache enabled.	Defines whether the non-cacheable area for the IF cache is enabled or disabled when ROM cache operation is enabled and non-cacheable area 1 is enabled.
<b>BSP_CFG_NONCACHEABLE_AREA1_OA_ENABLE</b>	0 = Non-cacheable area 1 setting of OA cache disabled. 1 = Non-cacheable area 1 setting of OA cache enabled.	Defines whether the non-cacheable area for the OA cache is enabled or disabled when ROM cache operation is enabled and non-cacheable area 1 is enabled.
<b>BSP_CFG_NONCACHEABLE_AREA1_DM_ENABLE</b>	0 = Non-cacheable area 1 setting of DM cache disabled. 1 = Non-cacheable area 1 setting of DM cache enabled.	Defines whether the non-cacheable area for the DM cache is enabled or disabled when ROM cache operation is enabled and non-cacheable area 1 is enabled.

## 3.2.16 Callback function at warm start

Table 3.16 Definition of callback function at warm start

Define	Value	Meaning
<b>BSP_CFG_USER_WARM_START_CALLBACK _PRE_INITC_ENABLED</b>	0 = User function is not called before C runtime environment has been initialized.  1 = User function is called before C runtime environment has been initialized.	Defines whether or not to call a user function before C runtime environment has been initialized.
<b>BSP_CFG_USER_WARM_START _PRE_C_FUNCTION</b>	Function to call before C runtime environment has been initialized.	Defines the function to be called when a user function is called before the C runtime environment has been initialized.
<b>BSP_CFG_USER_WARM_START_CALLBACK _POST_INITC_ENABLED</b>	0 = User function is not called after C runtime environment has been initialized.  1 = User function is called after C runtime environment has been initialized.	Defines whether or not to call a user function after C runtime environment has been initialized.
<b>BSP_CFG_USER_WARM_START _POST_C_FUNCTION</b>	Function to call after C runtime environment has been initialized.	Defines the function to be called when a user function is called after the C runtime environment has been initialized.

## 3.2.17 Board Revision

Table 3.17 Board Revision Defines

Define	Value	Meaning
<b>BSP_CFG_BOARD_REVISION</b>	See comments above #define in r_bsp_config.h.	There are multiple board revisions, and the specifications may differ from revision to revision. A specific board revision can be obtained based on this definition.



### **3.2.18 Interrupt Priority Level When FIT Module Interrupts Are Disabled**

For some BSP functions, it is necessary to ensure that, while these functions are executing, interrupts from other FIT modules do not occur. By controlling the IPL, these functions disable interrupts that are at or below the specified interrupt priority level.

**Table 3.18 Definition of Interrupt Priority Level When FIT Module Interrupts Are Disabled**

Define	Value	Meaning
<b>BSP_CFG_FIT_IPL_MAX</b>	See comments above #define in r_bsp_config.h.	Defines interrupt priority level when FIT module interrupts are disabled.

## 4. API Information

This Driver API follows the Renesas API naming standards.

---

### 4.1 Hardware Requirements

---

Not Applicable.

---

### 4.2 Hardware Resource Requirements

---

Not Applicable.

---

### 4.3 Software Requirements

---

None.

---

### 4.4 Limitations

---

None.

---

### 4.5 Supported Toolchains

---

This driver is tested and working with the toolchains listed in 9.1 Confirmed Operation Environment.

---

### 4.6 Header Files

---

All API calls are accessed by including a single file *platform.h* which is supplied with this driver's project code.

---

### 4.7 Integer Types

---

This project uses ANSI C99 "Exact width integer types" in order to make the code clearer and more portable. These types are defined in *stdint.h*.

---

### 4.8 Configuration Overview

---

For configuration information please see Section 3.

---

## 4.9 API Data Structures

---

### 4.9.1 Software Lock

This data structure is used for implementing atomic locking on RX MCUs. The *lock* member must be 4-bytes in order to use the RX's atomic XCHG instruction. This structure is the default type defined by the `BSP_CFG_USER_LOCKING_TYPE` macro.

```
typedef struct
{
    /* The actual lock. int32_t is used because this is what the xchg()
       instruction takes as parameters. */
    int32_t    lock;
} bsp_lock_t;
```

### 4.9.2 Interrupt Callback Parameter

This data structure is used when calling an interrupt callback function. The interrupt handler will fill in this structure, cast it as '(void \*)', and then send it as the argument to the callback function.

```
typedef struct
{
    bsp_int_src_t vector;           //Which vector caused this interrupt
} bsp_int_cb_args_t;
```

### 4.9.3 Interrupt Control Parameter

This data structure is used when calling the R\_BSP\_InterruptControl function. Specify the parameter value according to the interrupt control command.

```
/* Type to be used for pdata argument in Control function. */
typedef union
{
    uint32_t ipl;                 /* Used when enabling an interrupt to set that
                                   interrupt's priority level */
} bsp_int_ctrl_t;
```

## 4.10 API Typedefs

### 4.10.1 Register Protection

This typedef defines the different register protection options that can be toggled. Notice that some registers are grouped together. For example, LPC, CGC, and software reset registers are all protected by the same bit. Which items, and how many, are in this typedef will vary depending on the MCU being used. Please reference *cpu.h* for your MCU to see the valid options for your MCU. The typedef below belongs to the RX111.

```
/* The different types of registers that can be protected. */
typedef enum
{
    /* Enables writing to the registers related to the clock generation circuit:
       SCKCR, SCKCR3, PLLCR, PLLCR2, MOSCCR, SOSCCR, LOCCR, ILOCCR, HOCOCR,
       OSTDCR, OSTDSR, CKOCR. */
    BSP_REG_PROTECT_CGC = 0,
    /* Enables writing to the registers related to operating modes, low power
       consumption, the clock generation circuit, and software reset: SYSCR1,
       SBYCR, MSTPCRA, MSTPCRB, MSTPCRC, OPCCR, RSTCKCR, SOPCCR, MOFCR, MOSCWTCR,
       SWRR. */
    BSP_REG_PROTECT_LPC_CGC_SWR,
    /* Enables writing to the HOCOWTCR register. */
    BSP_REG_PROTECT_HOCOWTCR,
    /* Enables writing to the registers related to the LVD: LVCMPCR, LVDLVLR,
       LVD1CR0, LVD1CR1, LVD1SR, LVD2CR0, LVD2CR1, LVD2SR. */
    BSP_REG_PROTECT_LVD,
    /* Enables writing to MPC's PFS registers. */
    BSP_REG_PROTECT_MPC,
    /* This entry is used for getting the number of enum items. This must be the
       last entry. DO NOT REMOVE THIS ENTRY! */
    BSP_REG_PROTECT_TOTAL_ITEMS
} bsp_reg_protect_t;
```

#### 4.10.2 Hardware Resource Locks

This typedef defines the available hardware resource locks. For each entry in this enum one software lock will be allocated in the hardware lock array. Which items are in this list, and how many, will vary depending on the MCU chosen. The typedef below is for the RX111.

```
typedef enum
{
    BSP_LOCK_BSC = 0,
    BSP_LOCK_CAC,
    BSP_LOCK_CMT,
    BSP_LOCK_CMT0,
    BSP_LOCK_CMT1,
    BSP_LOCK_CRC,
    BSP_LOCK_DA,
    BSP_LOCK_DOC,
    BSP_LOCK_DTC,
    BSP_LOCK_ELC,
    BSP_LOCK_FLASH,
    BSP_LOCK_ICU,
    BSP_LOCK_IRQ0,
    BSP_LOCK_IRQ1,
    BSP_LOCK_IRQ2,
    BSP_LOCK_IRQ3,
    BSP_LOCK_IRQ4,
    BSP_LOCK_IRQ5,
    BSP_LOCK_IRQ6,
    BSP_LOCK_IRQ7,
    BSP_LOCK_IWDT,
    BSP_LOCK_MPC,
    BSP_LOCK_MTU,
    BSP_LOCK_MTU0,
    BSP_LOCK_MTU1,
    BSP_LOCK_MTU2,
    BSP_LOCK_MTU3,
    BSP_LOCK_MTU4,
    BSP_LOCK_MTU5,
    BSP_LOCK_POE,
    BSP_LOCK_RIIC0,
    BSP_LOCK_RSPI0,
    BSP_LOCK_RTC,
    BSP_LOCK_RTCB,
    BSP_LOCK_S12AD,
    BSP_LOCK_SCI1,
    BSP_LOCK_SCI5,
    BSP_LOCK_SCI12,
    BSP_LOCK_SMCI1,
    BSP_LOCK_SMCI5,
    BSP_LOCK_SMCI12,
    BSP_LOCK_SYSTEM,
    BSP_LOCK_USB0,
    BSP_NUM_LOCKS /* This entry is not a valid lock. It is used for sizing
                    g_bsp_Locks[] array below. Do not touch! */
} mcu_lock_t;
```

### 4.10.3 Interrupt Error Codes

This typedef defines the error codes that can be returned by the R\_BSP\_InterruptWrite(), R\_BSP\_InterruptRead(), and R\_BSP\_InterruptControl() functions.

The typedef below is for RX65N

The definition BSP\_INT\_ERR\_GROUP\_STILL\_ENABLED is not included in the MCUs which do not support group interrupts.

Some RX MCUs may support additional interrupt control commands.

```
typedef enum
{
    BSP_INT_SUCCESS = 0,
    BSP_INT_ERR_NO_REGISTERED_CALLBACK, //There is not a registered callback
                                      //for this interrupt source
    BSP_INT_ERR_INVALID_ARG,          //Illegal argument input
    BSP_INT_ERR_UNSUPPORTED           //Operation is not supported by this API
    BSP_INT_ERR_GROUP_STILL_ENABLED   //Not all group interrupts were disabled
                                      //so group interrupt was not disabled
} bsp_int_err_t;
```

### 4.10.4 Interrupt Control Commands

This typedef defines the available commands that can be used with the R\_BSP\_InterruptControl() function.

The typedef below is for RX65N.

The definitions BSP\_INT\_CMD\_GROUP\_INTERRUPT\_ENABLE and BSP\_INT\_CMD\_GROUP\_INTERRUPT\_DISABLE are not included in the MCUs which do not support group interrupts.

Some RX MCUs may support additional interrupt control commands.

```
typedef enum
{
    BSP_INT_CMD_CALL_CALLBACK = 0, //Calls registered callback function
                                   //if one exists
    BSP_INT_CMD_INTERRUPT_ENABLE, //Enables a give interrupt (Available for NMI
                                   //pin, FPU, and Bus Error)
    BSP_INT_CMD_INTERRUPT_DISABLE //Disables a given interrupt (Available for
                                   //FPU, and Bus Error)
    BSP_INT_CMD_GROUP_INTERRUPT_ENABLE, //Enables a group interrupt when
                                       //a group interrupt source is given.
                                       //The pdata argument should give the IPL
                                       //to be used using the bsp_int_ctrl_t type.
                                       //If a group interrupt is enabled
                                       //multiple times with different IPL levels
                                       //it will use the highest given IPL.
    BSP_INT_CMD_GROUP_INTERRUPT_DISABLE //Disables a group interrupt when
                                       //a group interrupt source is given.
                                       //This will only disable a group
                                       //Interrupt when all interrupt sources
                                       //for that group are already disabled.
} bsp_int_cmd_t;
```

### 4.10.5 Interrupt Callback Function

This typedef defines the callback function type. Callback functions should have a 'void' return type and should take an argument of type 'void \*'.

```
typedef void (*bsp_int_cb_t)(void *);
```

### 4.10.6 Interrupt Sources

This typedef defines the interrupt vectors that can have callbacks registered to them. Note that the options in this typedef will vary depending on which MCU is being used. The typedef below is for the RX111. Other RX MCU's may support additional interrupt sources.

```
typedef enum
{
    BSP_INT_SRC_EXC_SUPERVISOR_INSTR = 0, //Occurs when privileged instruction
                                           //is executed in User Mode
    BSP_INT_SRC_EXC_UNDEFINED_INSTR,      //Occurs when MCU encounters an
                                           //unknown instruction
    BSP_INT_SRC_EXC_NMI_PIN,              //NMI Pin interrupt
    BSP_INT_SRC_EXC_FPU,                  //FPU exception
    BSP_INT_SRC_OSC_STOP_DETECT,          //Oscillation stop is detected
    BSP_INT_SRC_WDT_ERROR,                //WDT underflow/refresh error has
                                           //occurred
    BSP_INT_SRC_IWDT_ERROR,               //IWDT underflow/refresh error has
                                           //occurred
    BSP_INT_SRC_LVD1,                     //Voltage monitoring 1 interrupt
    BSP_INT_SRC_LVD2,                     //Voltage monitoring 2 interrupt
    BSP_INT_SRC_UNDEFINED_INTERRUPT,      //Interrupt has triggered for a vector
                                           //that user did not write a handler
                                           //for
    BSP_INT_SRC_BUS_ERROR,                //Bus error: illegal address access or
                                           //timeout
    BSP_INT_SRC_TOTAL_ITEMS               //DO NOT MODIFY! This is used for
                                           //sizing the interrupt callback array.
} bsp_int_src_t;
```

### 4.10.7 Unit for Software Delay

This typedef defines units which can be used with the R\_BSP\_SoftwareDelay function.

```
/* Available delay units. */
typedef enum
{
    BSP_DELAY_MICROSECS = 1000000, // Requested delay amount is in microseconds
    BSP_DELAY_MILLISECS = 1000,    // Requested delay amount is in milliseconds
    BSP_DELAY_SECS = 1,             // Requested delay amount is in seconds
} bsp_delay_units_t;
```

---

## 4.11 Return Values

---

None.

---

## 4.12 Adding Driver to Your Project

---

Please see Section 6, Section 7, and Section 8.

## 4.13 Code size

Typical code sizes associated with this module are listed below. Information is listed for a single representative device of the RX100 Series, RX200 Series, and RX600 Series, respectively.

The ROM (code and constants) and RAM (global data) sizes are determined by the build-time configuration options described in 3, Configuration. The table lists reference values when the C compiler's compile options are set to their default values, as described in 4.5, Supported Toolchain. The compile option default values are optimization level: 2, optimization type: for size, and data endianness: little-endian. The code size varies depending on the C compiler version and compile options.

ROM, RAM and Stack Code Sizes				
Device	Category	Memory Used		Remarks
		With Parameter Checking	Without Parameter Checking	
RX130	ROM	4,936 bytes	4,929 bytes	
	RAM	3,054 bytes		
	Maximum stack usage	184 bytes		
RX24U	ROM	4,994 bytes	4,987 bytes	
	RAM	3,382 bytes		
	Maximum stack usage	184 bytes		
RX65N	ROM	7,478 bytes	7,458 bytes	
	RAM	7,444 bytes		
	Maximum stack usage	184 bytes		

### 4.14 “for”, “while” and “do while” statements

In this module, “for”, “while” and “do while” statements (loop processing) are used in processing to wait for register to be reflected and so on. For these loop processing, comments with “WAIT\_LOOP” as a keyword are described. Therefore, if user incorporates fail-safe processing into loop processing, user can search the corresponding processing with “WAIT\_LOOP”.

The following shows example of description.

```
while statement example :
/* WAIT_LOOP */
while(0 == SYSTEM.OSCOVFSR.BIT.PLOVF)
{
    /* The delay period needed is to make sure that the PLL has stabilized. */
}

for statement example :
/* Initialize reference counters to 0. */
/* WAIT_LOOP */
for (i = 0; i < BSP_REG_PROTECT_TOTAL_ITEMS; i++)
{
    g_protect_counters[i] = 0;
}

do while statement example :
/* Reset completion waiting */
do
{
    reg = phy_read(ether_channel, PHY_REG_CONTROL);
    count++;
} while ((reg & PHY_CONTROL_RESET) && (count < ETHER_CFG_PHY_DELAY_RESET)); /* WAIT_LOOP */
```



## 5. API Functions

### 5.1 Summary

The following functions are included in this design:

Function	Description
R_BSP_GetVersion	Returns version of r_bsp
R_BSP_InterruptsDisable	Globally disables interrupts
R_BSP_InterruptsEnable	Globally enables interrupts
R_BSP_CpuInterruptLevelRead	Reads the CPU's Interrupt Priority Level
R_BSP_CpuInterruptLevelWrite	Writes the CPU's Interrupt Priority Level
R_BSP_RegisterProtectEnable	Enables write protection for selected registers
R_BSP_RegisterProtectDisable	Disables write protection for selected registers
R_BSP_SoftwareLock	Attempts to reserve a lock
R_BSP_SoftwareUnlock	Releases a lock
R_BSP_HardwareLock	Attempts to reserve a hardware peripheral lock
R_BSP_HardwareUnlock	Releases a hardware peripheral lock
R_BSP_InterruptWrite	Registers a callback function for an interrupt
R_BSP_InterruptRead	Gets the callback for an interrupt if one is registered.
R_BSP_InterruptControl	Controls various interrupt operations.
R_BSP_SoftwareDelay	Delays the specified duration.
R_BSP_GetClkFreqHz	Returns the system clock frequency specified by the r_bsp.
R_BSP_StartupOpen <sup>*1</sup>	Performs the startup processing for using the BSP.
R_BSP_VoltageLevelSetting <sup>*2</sup>	Makes settings to the voltage level setting register (VOLSR) that are necessary in order to use the USB, AD, and RIIC peripheral modules.

Note 1. This function is only used when the BSP startup processing is disabled.

Note 2. This function is available only on the RX66T and RX72T.

### 5.2 R\_BSP\_GetVersion()

Returns the current version of the r\_bsp.

#### Format

```
uint32_t R_BSP_GetVersion(void);
```

#### Parameters

None.

#### Return Values

Version of the r\_bsp.

#### Properties

Prototyped in file “r\_bsp\_common.h”.

Implemented in file “r\_bsp\_common.c”.

#### Description

This function will return the version of the currently installed r\_bsp. The version number is encoded where the top 2 bytes are the major version number and the bottom 2 bytes are the minor version number. For example, Version 4.25 would be returned as 0x00040019.

#### Reentrant

Yes.

#### Example

```
uint32_t cur_version;

/* Get version of installed r_bsp. */
cur_version = R_BSP_GetVersion();

/* Check to make sure version is new enough for this application's use. */
if (MIN_VERSION > cur_version)
{
    /* This r_bsp version is not new enough and does not have XXX feature
       that is needed by this application. Alert user. */
    ....
}
```

#### Special Notes:

This function is specified to be an inline function in r\_bsp\_common.c.

### 5.3 R\_BSP\_InterruptsDisable()

Globally disables interrupts.

#### Format

```
void R_BSP_InterruptsDisable(void);
```

#### Parameters

None.

#### Return Values

None.

#### Properties

Prototyped in file “cpu.h”.

Implemented in file “cpu.c.”

#### Description

This function globally disables interrupts. This is performed by clearing the ‘I’ bit in the CPU’s Processor Status Word (PSW) register.

#### Reentrant

Yes.

#### Example

```
/* Disable interrupts so that accessing this critical area will be guaranteed
   to be atomic. */
R_BSP_InterruptsDisable();

/* Access critical resource while interrupts are disabled */
....

/* End of critical area. Enable interrupts. */
R_BSP_InterruptsEnable();
```

#### Special Notes:

The ‘I’ bit of the PSW can only be modified when in Supervisor Mode. If the CPU is in User Mode and this function is called then a Privileged Instruction Exception will occur.

### 5.4 R\_BSP\_InterruptsEnable()

Globally enables interrupts.

#### Format

```
void R_BSP_InterruptsEnable(void);
```

#### Parameters

None.

#### Return Values

None.

#### Properties

Prototyped in file “cpu.h”.

Implemented in file “cpu.c”.

#### Description

This function globally enables interrupts. This is performed by setting the ‘I’ bit in the CPU’s Processor Status Word (PSW) register.

#### Reentrant

Yes.

#### Example

```
/* Disable interrupts so that accessing this critical area will be guaranteed
   to be atomic. */
R_BSP_InterruptsDisable();

/* Access critical resource while interrupts are disabled */
....

/* End of critical area. Enable interrupts. */
R_BSP_InterruptsEnable();
```

#### Special Notes:

The ‘I’ bit of the PSW can only be modified when in Supervisor Mode. If the CPU is in User Mode and this function is called then a Privileged Instruction Exception will occur.

### 5.5 R\_BSP\_CpuInterruptLevelRead()

Reads the CPU's Interrupt Priority Level.

#### Format

```
uint32_t R_BSP_CpuInterruptLevelRead(void);
```

#### Parameters

None.

#### Return Values

The CPU's Interrupt Priority Level.

#### Properties

Prototyped in file "cpu.h".

Implemented in file "cpu.c".

#### Description

This function reads the CPU's Interrupt Priority Level. This level is stored in the IPL bits of the Processor Status Word (PSW) register.

#### Reentrant

Yes.

#### Example

```
uint32_t cpu_ipl;  
  
/* Read the CPU's Interrupt Priority Level. */  
cpu_ipl = R_BSP_CpuInterruptLevelRead();
```

#### Special Notes:

None.

### 5.6 R\_BSP\_CpuInterruptLevelWrite()

Writes the CPU's Interrupt Priority Level.

#### Format

```
bool R_BSP_CpuInterruptLevelWrite(uint32_t level);
```

#### Parameters

level

The level to write to the CPU's IPL.

#### Return Values

*true:* Successful, CPU's IPL has been written

*false:* Failure, provided 'level' has invalid IPL value

#### Properties

Prototyped in file "cpu.h".

Implemented in file "cpu.c".

#### Description

This function writes the CPU's Interrupt Priority Level. This level is stored in the IPL bits of the Processor Status Word (PSW) register. This function does check to make sure that the IPL being written is valid. The maximum and minimum valid settings for the CPU IPL are defined in *mcu\_info.h* using the BSP\_MCU\_IPL\_MAX and BSP\_MCU\_IPL\_MIN macros.

#### Reentrant

Yes.

#### Example

```
/* Response time is critical during this portion of the application. Set the
   CPU's Interrupt Priority Level so that interrupts below the set
   threshold are disabled. Interrupt vectors with IPLs higher than this
   threshold will still be accepted and will not have to contend with the
   lower priority interrupts. */
if (false == R_BSP_CpuInterruptLevelWrite(HIGH_PRIORITY_THRESHOLD))
{
    /* Error in setting CPU's IPL. Invalid IPL was provided. */
    ....
}

/* Only high priority interrupts (as defined by user) will be accepted during
   this period. */
....

/* Time sensitive period is over. Set CPU's IPL back to lower value so that
   lower priority interrupts can now be serviced again. */
if (false == R_BSP_CpuInterruptLevelWrite(LOW_PRIORITY_THRESHOLD))
{
    /* Error in setting CPU's IPL. Invalid IPL was provided. */
    ....
}
```

#### Special Notes:

The CPU's IPL can only be modified by the user when in Supervisor Mode. If the CPU is in User Mode and this function is called then a Privileged Instruction Exception will occur.

### 5.7 R\_BSP\_RegisterProtectEnable()

Enables write protection for selected registers.

#### Format

```
void R_BSP_RegisterProtectEnable(bsp_reg_protect_t regs_to_protect);
```

#### Parameters

regs\_to\_protect

Which registers to enable write protection for. See Section 4.10.1.

#### Return Values

None.

#### Properties

Prototyped in file “cpu.h”.

Implemented in file “cpu.c”.

#### Description

This function enables write protection for the input registers. Only certain MCU registers have the ability to be write protected. To see which registers are available to be protected by this function look at the *bsp\_reg\_protect\_t* enum in *cpu.h* for your MCU.

This function, and *R\_BSP\_RegisterProtectDisable()*, use counters for each entry in the *bsp\_reg\_protect\_t* enum so that users can call these functions multiple times without problem. By controlling the IPL (interrupt priority level), interrupts that are at or below the specified interrupt priority level will be disabled while the function is executing. An example of why this is needed is shown below in the Special Notes section below.

#### Reentrant

No.

#### Example

```
/* Write access must be enabled before writing to MPC registers. */
R_BSP_RegisterProtectDisable(BSP_REG_PROTECT_MPC);

/* MPC registers are now writable. */
/* Setup Port 2 Pin 6 as TXD1 for SCI1. */
MPC.P26PFS.BYTE = 0x0A;

/* Setup Port 4 Pin 2 as AD input for potentiometer. */
MPC.P42PFS.BYTE = 0x80;

/* More pin setup. */
....

/* Enable write protection for MPC registers to protect against accidental
   writes. */
R_BSP_RegisterProtectEnable(BSP_REG_PROTECT_MPC);
```

## Special Notes:

This is an example showing why counters are needed for register protection.

1. The user's application calls the open function for `r_module1`.
2. `r_module1` disables write protection for some registers that are required to be written during initialization of this module by calling `R_BSP_RegisterProtectDisable()`. At this point the counter for this protected registers is incremented by 1.
3. `r_module1` writes to unprotected registers that were made writable by previous step.
4. `r_module1` also depends upon `r_module2` and needs to call its open function, `R_MODULE2_Open()`.
5. In the `r_module2` function it also needs to write to the same protected registers as `r_module1`. `r_module2` calls `R_BSP_RegisterProtectDisable()` again since it does not know that `r_module1` already enabled write access to these registers. The counter for the protected register is incremented by 1 and is now 2.
6. `r_module2` writes to unprotected registers that were made writable by previous step.
7. `r_module2` is done writing to the protected registers so it calls `R_BSP_RegisterProtectEnable()` to re-enable write protection for the registers. The counter for the protected register is decremented by 1 and is now 1. Since the counter is not 0 the code knows that it should not actually re-enable protection yet.
8. Execution goes back to `R_MODULE1_Open()` where it continues to write to registers. Here is where the problem can occur. If counters are not used then the call to `R_BSP_RegisterProtectEnable()` by `r_module2` (Step #7) can prevent the registers in `r_module1` from being written.
9. `r_module1` is done writing to the protected registers so it calls `R_BSP_RegisterProtectEnable()` to re-enable write protection for the registers. The counter for the protected register is decremented by 1 and is now 0. Since the counter is 0 the API code knows that it is safe to re-enable write protection for the registers.

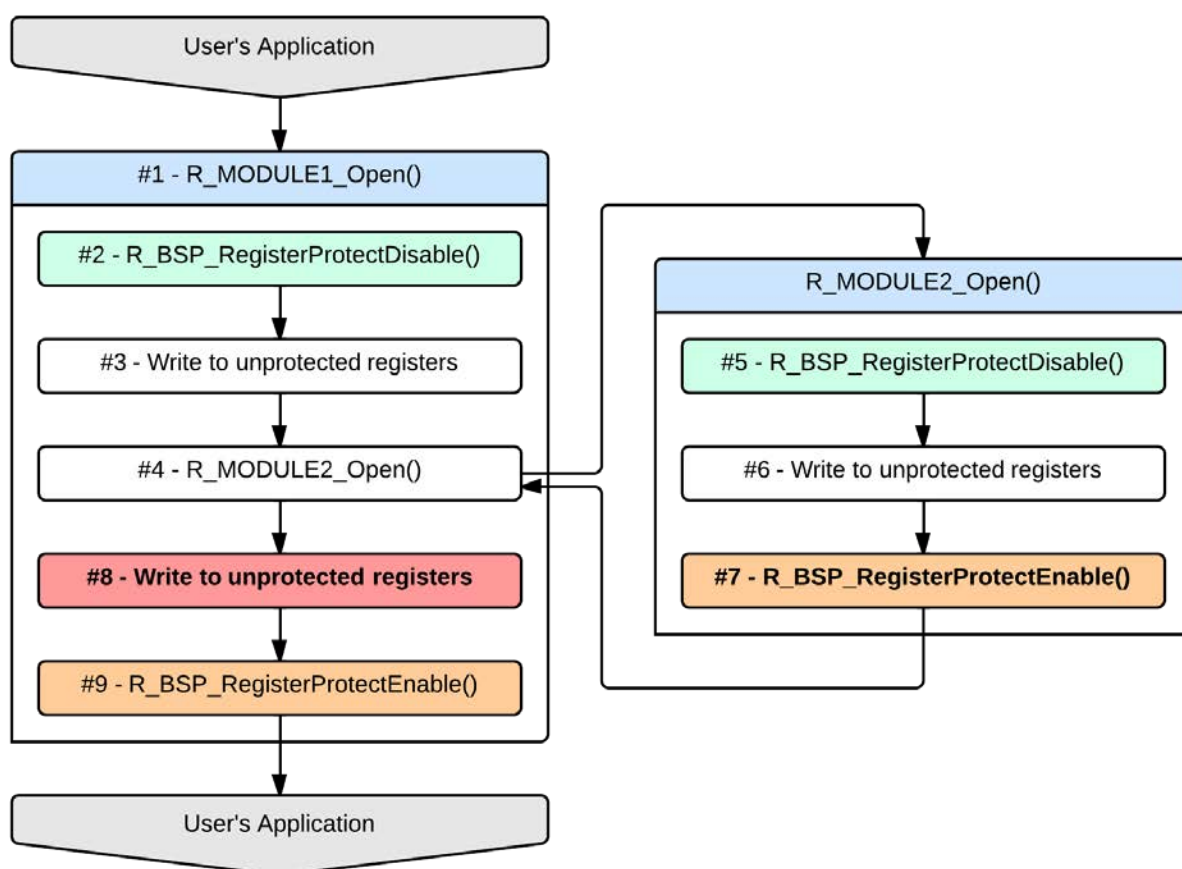


Figure 5.1 Register Protection Example



### 5.8 R\_BSP\_RegisterProtectDisable()

Disables write protection for selected registers.

#### Format

```
void R_BSP_RegisterProtectDisable(bsp_reg_protect_t regs_to_unprotect);
```

#### Parameters

regs\_to\_unprotect

Which registers to disable write protection for. See Section 4.10.1.

#### Return Values

None.

#### Properties

Prototyped in file “cpu.h”.

Implemented in file “cpu.c”

#### Description

This function disables write protection for the input registers. Only certain MCU registers have the ability to be write protected. To see which registers are available to be protected by this function look at the *bsp\_reg\_protect\_t* enum in *cpu.h* for your MCU.

This function, and R\_BSP\_RegisterProtectEnable(), use counters for each entry in the *bsp\_reg\_protect\_t* enum so that users can call these functions multiple times without problem. By controlling the IPL (interrupt priority level), interrupts that are at or below the specified interrupt priority level will be disabled while the function is executing. An example of why this is needed is shown in the Special Notes section of Section 5.7.

#### Reentrant

No.

#### Example

```
/* Write access must be enabled before writing to CGC registers. */
R_BSP_RegisterProtectDisable(BSP_REG_PROTECT_CGC);
/* CGC registers are spread amongst two protection bits. */
R_BSP_RegisterProtectDisable(BSP_REG_PROTECT_LPC_CGC_SWR);

/* CGC registers are now writable. */
/* Select PLL as clock source. */
SYSTEM.SCKCR3.WORD = 0x0400;

/* More clock setup. */
....

/* Enable write protection for CGC registers to protect against accidental
   writes. */
R_BSP_RegisterProtectEnable(BSP_REG_PROTECT_CGC);
R_BSP_RegisterProtectEnable(BSP_REG_PROTECT_LPC_CGC_SWR);
```

#### Special Notes:

None.

## 5.9 R\_BSP\_SoftwareLock()

Attempts to reserve a lock.

### Format

```
bool R_BSP_SoftwareLock(BSP_CFG_USER_LOCKING_TYPE * const plock);
```

### Parameters

plock

Pointer to lock structure with lock to try and acquire.

### Return Values

*true:*     Successful, lock was available and acquired

*false:*    Failure, lock was already acquired and is not available

### Properties

Prototyped in file "locking.h".

Implemented in file "locking.c"

### Description

This function implements an atomic locking mechanism. Locks can be used in numerous ways. Two common uses of locks are to protect critical sections of code and to protect against duplicate resource allocation. For protecting critical sections of code the user would require that the code first obtain the critical section's lock before executing. An example of protecting against duplicate resource allocation would be if the user had two FIT modules that used the same peripheral. For example, the user may have one FIT module that uses the SCI peripheral in UART mode and another FIT module that uses the SCI peripheral in I<sup>2</sup>C mode. To make sure that both modules cannot use the same SCI channel, locks can be used.

Care should be taken when using locks as they do not provide advanced features one might expect from an RTOS semaphore or mutex. If used improperly locks can lead to deadlock in the user's system.

Users can override the default locking mechanisms. See Section 3.2.8 for more information.

### Reentrant

Yes.

### Example

This shows an example of using locks with the Virtual EEPROM code. This FIT module does not access any peripherals directly, but still needs protection against reentrancy.

```
/* Used for locking state of VEE */
static BSP_CFG_USER_LOCKING_TYPE g_vee_lock;

/*****
 * Function Name: vee_lock_state
 * Description   : Tries to lock the VEE state
 * Arguments     : state -
 *                Which state to try to transfer to
 * Return value  : VEE_SUCCESS -
 *                Successful, state taken
 *                VEE_BUSY -
 *                Data flash is busy, state not taken
 *****/
static uint8_t vee_lock_state (vee_states_t state)
{
    /* Local return variable */
    uint8_t ret = VEE_SUCCESS;

    /* Try to lock VEE to change state. */
    /* Check to see if lock was successfully taken. */
    if(false == R_BSP_SoftwareLock(&g_vee_lock))
    {
```

```
    /* Another operation is on-going */
    return VEE_BUSY;
}

/* Check VEE status to make sure we are not interfering with another
thread */
if( state == VEE_READING )
{
    /* If another read comes in while the state is reading then we are OK */
    if( ( g_vee_state != VEE_READY ) && ( g_vee_state != VEE_READING) )
    {
        /* VEE is busy */
        ret = VEE_BUSY;
    }
}
else
{
    /* If we are doing something other than reading then we must be in the
VEE_READY state */
    if( g_vee_state != VEE_READY )
    {
        /* VEE is busy */
        ret = VEE_BUSY;
    }
}

if( ret == VEE_SUCCESS )
{
    /* Lock state */
    g_vee_state = state;
}

/* Release lock. */
R_BSP_SoftwareUnlock(&g_vee_lock);

return ret;
}
```

### Special Notes:

None.

### 5.10 R\_BSP\_SoftwareUnlock()

Releases a lock.

#### Format

```
bool R_BSP_SoftwareUnlock(BSP_CFG_USER_LOCKING_TYPE * const plock);
```

#### Parameters

plock

Pointer to lock structure with lock to release.

#### Return Values

*true:* Successful, lock was released. Or the lock has been already released.

*false:* Failure, lock could not be released

#### Properties

Prototyped in file “locking.h”.

Implemented in file “locking.c”

#### Description

This function releases a lock that was previously acquired using the R\_BSP\_SoftwareLock() function. Please see Section 5.9 for more information on locks.

#### Reentrant

Yes.

#### Example

This shows an example of using locks for a critical section of code.

```
/* Used for locking critical section of code. */
static BSP_CFG_USER_LOCKING_TYPE g_critical_lock;

static bool critical_area_example (void)
{
    /* Try to acquire lock for executing critical section below. */
    if(false == R_BSP_SoftwareLock(&g_critical_lock))
    {
        /* Lock has already been acquired. */
        return false;
    }

    /* BEGIN CRITICAL SECTION. */

    /* Execute critical section. */
    ....

    /* END CRITICAL SECTION. */

    /* Release lock. */
    R_BSP_SoftwareUnlock(&g_critical_lock);

    return true;
}
```

#### Special Notes:

None.

## 5.11 R\_BSP\_HardwareLock()

Attempts to reserve a hardware peripheral lock.

### Format

```
bool R_BSP_HardwareLock(mcu_lock_t const hw_index);
```

### Parameters

hw\_index

Index of lock to acquire from the hardware lock array.

### Return Values

*true:* Successful, lock was available and acquired

*false:* Failure, lock was already acquired and is not available

### Properties

Prototyped in file "locking.h".

Implemented in file "locking.c"

### Description

This function attempts to acquire the lock for a hardware resource of the MCU. Instead of sending in a pointer to a lock as with the R\_BSP\_SoftwareLock() function, the user sends in an index to an array that holds 1 lock per MCU hardware resource. This array is shared amongst all FIT modules and user code therefore allowing multiple FIT modules (and user code) to use the same locks. The user can see the available hardware resources by looking at the *mcu\_lock\_t* enum in *mcu\_locks.h*. These enum values are also the index into the hardware lock array. The same atomic locking mechanisms from the R\_BSP\_SoftwareLock() function are used with this function as well.

### Reentrant

Yes.

### Example

This example shows hardware locks being used to control access to a RSPI channel.

```

/*****
* Function Name: R_RSPI_Send
* Description   : Send data over RSPI channel.
* Arguments     : channel -
*                 Which channel to use.
*                 pdata -
*                 Pointer to data to transmit
*                 bytes -
*                 Number of bytes to transmit
* Return Value  : true -
*                 Data sent successfully.
*                 false -
*                 Could not obtain lock.
*****/
bool R_RSPI_Send(uint8_t channel, uint8_t * pdata, uint32_t bytes)
{
    mcu_lock_t rspi_channel_lock;

    /* Check and make sure channel is valid. */
    ...

    /* Use appropriate RSPI channel lock. */
    if (0 == channel)
    {
        rspi_channel_lock = BSP_LOCK_RSPI0;
    }
    else
    {

```

```
    rspi_channel_lock = BSP_LOCK_RSPI1;
}

/* Attempt to obtain lock so we know we have exclusive access to RSPI
channel. */
if (false == R_BSP_HardwareLock(rspi_channel_lock))
{
    /* Lock has already been acquired by another task. Need to try again
    later. */
    return false;
}

/* Else, lock was acquired. Continue on with send operation. */
...

/* Now that send operation is completed, release hold on lock so that other
tasks may use this RSPI channel. */
R_BSP_HardwareUnlock(rspi_channel_lock);

return true;
}
```

### Special Notes:

Each entry in the *mcu\_lock\_t* enum in *mcu\_locks.h* will be allocated a lock. On RX MCUs, each lock is required to be 4-bytes. If RAM space is an issue then the user can remove the entries from the *mcu\_lock\_t* enum that they are not using. For example, if the user is not using the CRC peripheral then they could delete the BSP\_LOCK\_CRC entry. The user will save 4-bytes per deleted entry.

### 5.12 R\_BSP\_HardwareUnlock()

Releases a hardware peripheral lock.

#### Format

```
bool R_BSP_HardwareUnlock(mcu_lock_t const hw_index);
```

#### Parameters

hw\_index

Index of lock to release from the hardware lock array.

#### Return Values

*true:* Successful, lock was released

*false:* Failure, lock could not be released

#### Properties

Prototyped in file “locking.h”.

Implemented in file “locking.c”

#### Description

This function attempts to release the lock for a hardware resource of the MCU that was previously acquired using the R\_BSP\_HardwareLock() function. For more information on hardware locks please see Section 5.11.

#### Reentrant

Yes.

#### Example

This example shows hardware locks being used to prevent duplicate hardware resource allocation. The R\_SCI\_Open() function takes the lock so all modules know that the SCI channel is being used. R\_SCI\_Close() releases the lock thereby making it available for any module to use.

```
bool R_SCI_Open(uint8_t channel, ...)
{
    mcu_lock_t sci_channel_lock;

    /* Check and make sure channel is valid. */
    ...

    /* Use appropriate RSPI channel lock. */
    if (0 == channel)
    {
        sci_channel_lock = BSP_LOCK_SCI0;
    }
    else if (1 == channel)
    {
        sci_channel_lock = BSP_LOCK_SCI1;
    }
    ... continue for other channels ...

    /* Attempt to obtain lock so we know we have exclusive access to SCI
       channel. */
    if (false == R_BSP_HardwareLock(sci_channel_lock))
    {
        /* Lock has already been acquired by another task or another FIT module.
           Need to try again later. */
        return false;
    }

    /* Else, lock was acquired. Continue on initialization. */
    ...
}
```

```

}

bool R_SCI_Close(uint8_t channel, ...)
{
    mcu_lock_t sci_channel_lock;

    /* Check and make sure channel is valid. */
    ...

    /* Use appropriate RSPI channel lock. */
    if (0 == channel)
    {
        sci_channel_lock = BSP_LOCK_SCI0;
    }
    else if (1 == channel)
    {
        sci_channel_lock = BSP_LOCK_SCI1;
    }
    ... continue for other channels ...

    /* Clean up and turn off this SCI channel. */
    ....

    /* Release hardware lock for this channel. */
    R_BSP_HardwareUnlock(sci_channel_lock);
}

```

**Special Notes:**

Each entry in the *mcu\_lock\_t* enum in *mcu\_locks.h* will be allocated a lock. On RX MCUs, each lock is required to be 4-bytes. If RAM space is an issue then the user can remove the entries from the *mcu\_lock\_t* enum that they are not using. For example, if the user is not using the CRC peripheral then they could delete the BSP\_LOCK\_CRC entry. The user will save 4-bytes per deleted entry.



### 5.13 R\_BSP\_InterruptWrite()

Registers a callback function for an interrupt.

#### Format

```
bsp_int_err_t R_BSP_InterruptWrite(bsp_int_src_t vector,
                                   bsp_int_cb_t callback);
```

#### Parameters

vector

Which interrupt to register a callback for. See Section 4.10.6.

callback

Pointer to function to call when interrupt occurs. See Section 4.10.5.

#### Return Values

*BSP\_INT\_SUCCESS: Successful, callback has been registered*

*BSP\_INT\_ERR\_INVALID\_ARG: Invalid function address input, any previous function has been unregistered*

#### Properties

Prototyped in file “mcu\_interrupts.h”.

Implemented in file “mcu\_interrupts.c”.

#### Description

This function registers a callback function for an interrupt. If FIT\_NO\_FUNC, NULL, or any other invalid function address is passed for the callback argument then any previously registered callbacks are unregistered.

If one of the interrupts that is handled by this code is triggered then the interrupt handler will query this code to see if a valid callback function is registered. If one is found then the callback function will be called. If one is not found then the interrupt handler will clear the appropriate flag(s) and exit.

If the user has a callback function registered and wishes to no longer handle the interrupt then the user should call this function again with FIT\_NO\_FUNC as the *vector* parameter.

#### Reentrant

No.

#### Example

```
/* Prototype for callback function. */
void bus_error_callback(void * pdata);

void main (void)
{
    bsp_int_err_t err;

    /* Register bus_error_callback() to be called whenever a bus error occurs */
    err = R_BSP_InterruptWrite(BSP_INT_SRC_BUS_ERROR, bus_error_callback);

    if (BSP_INT_SUCCESS != err)
    {
        /* Error in registering callback. Alert user. */
        ...
    }
}

void bus_error_callback (void * pdata)
{
    /* Bus error has occurred. Handle accordingly. */
    ...
}
```

### Special Notes:

Use of FIT\_NO\_FUNC is preferred over NULL since access to the address defined by FIT\_NO\_FUNC will cause a bus error which is easy for the user to catch. NULL typically resolves to 0 which is a valid address on RX MCUs.

---

## 5.14 R\_BSP\_InterruptRead()

---

Gets the callback for an interrupt if one is registered.

### Format

```
bsp_int_err_t R_BSP_InterruptRead(bsp_int_src_t vector,  
                                   bsp_int_cb_t * callback);
```

### Parameters

vector

Which interrupt to read the callback for. See Section 4.10.6.

callback

Pointer to where to store callback address. See Section 4.10.5.

### Return Values

*BSP\_INT\_SUCCESS:*

*Successful, callback address has been returned*

*BSP\_INT\_ERR\_NO\_REGISTERED\_CALLBACK:*

*No valid callback has been registered for this interrupt source.*

### Properties

Prototyped in file “mcu\_interrupts.h”.

Implemented in file “mcu\_interrupts.c”.

### Description

This function returns the callback function address for an interrupt if one has been registered. If a callback function has not been registered then an error is returned and nothing is stored to the *callback* address.

### Reentrant

No.

### Example

```
/* This function handles bus error interrupts. The address for this function  
   is located in the bus error interrupt vector. */  
void bus_error_isr (void)  
{  
    bsp_int_err_t err;  
    bsp_int_cb_t * user_callback;  
  
    /* Bus error has occurred, see if a callback function has been registered */  
    err = R_BSP_InterruptRead(BSP_INT_SRC_BUS_ERROR, user_callback);  
  
    if (BSP_INT_SUCCESS == err)  
    {  
        /* Valid callback function found. Call it. */  
        user_callback ();  
    }  
  
    /* Clear bus error flags. */  
    ...  
}
```

### Special Notes:

None.

## 5.15 R\_BSP\_InterruptControl()

Controls various interrupt operations.

### Format

```
bsp_int_err_t R_BSP_InterruptControl(bsp_int_src_t vector,
                                     bsp_int_cmd_t cmd,
                                     void *pdata)
```

### Parameters

vector

Which interrupt to control for. See Section 4.10.6.

cmd

Interrupt control command. See Section 4.10.4.

pdata

Pointer to the argument for each command. Typecasted to void\*. See Section 4.9.3.

Most of the commands do not need the argument and take FIT\_NO\_PTR for this parameter.

For BSP\_INT\_CMD\_GROUP\_INTERRUPT\_ENABLE, specify the interrupt priority level for group interrupts as the argument.

### Return Values

<i>BSP_INT_SUCCESS:</i>	<i>Successful</i>
<i>BSP_INT_ERR_NO_REGISTERED_CALLBACK:</i>	<i>No valid callback has been registered for this interrupt source.</i>
<i>BSP_INT_ERR_INVALID_ARG:</i>	<i>The command passed is invalid.</i>
<i>BSP_INT_ERR_UNSUPPORTED:</i>	<i>This processing is not supported.</i>
<i>BSP_INT_ERR_GROUP_STILL_ENABLED:</i>	<i>Group interrupt request remains enabled.</i>

### Properties

Prototyped in file “mcu\_interrupts.h”

### Description

This function controls the interrupt callback function call and enabling/disabling interrupts such as bus error interrupt, floating-point exception, NMI pin interrupt, and group interrupts.

When BSP\_INT\_CMD\_GROUP\_INTERRUPT\_ENABLE is set as the interrupt control command, the interrupt request (IER) for group interrupts is enabled and also the interrupt priority level is set. The interrupt priority level set must be higher than the current level.

When BSP\_INT\_CMD\_GROUP\_INTERRUPT\_DISABLE is set as the interrupt control command, the interrupt request (IER) for group interrupts is disabled. Note that the interrupt request (IER) for group interrupts cannot be disabled as long as all interrupt requests (GEN) caused by grouped interrupt sources are disabled.

### Reentrant

No.

### Example

```
bsp_int_err_t err;
bsp_int_ctrl_t int_ctrl;

err = BSP_INT_ERR_NO_INVALID_ARG;
int_ctrl.ipl = 0x0A;

err = R_BSP_InterruptControl(BSP_INT_SRC_BL0_SCI0_TEI0,
                             BSP_INT_CMD_GROUP_INTERRUPT_ENABLE,
                             &int_ctrl);

if (BSP_INIT_SUCCESS != err)
{
    /* NG processing */
}
```

### Special Notes:

None.

---

## 5.16 R\_BSP\_SoftwareDelay()

---

Delay the specified duration in units and return.

### Format

```
bool R_BSP_SoftwareDelay(uint32_t delay, bsp_delay_units_t units)
```

### Parameters

delay

The number of 'units' to delay.

units

The 'base' for the units specified. See Section 4.10.7.

### Return Values

*true:* True if delay executed

*false:* False if delay/units combination resulted in overflow/underflow

### Properties

Prototyped in file "r\_bsp\_common.h".

Implemented in file "r\_bsp\_common.c"

### Description

This is function that may be called for all MCU targets to implement a specific wait time.

The actual delay time is plus the overhead at a specified duration. The overhead changes under the influence of compiler, operating frequency and ROM cache. When the operating frequency is low, or the specified duration in units of microsecond level, please note that the error becomes large.

### Reentrant

No.

### Example

```
bool ret;

/* Delay 5 seconds before returning */
ret = R_BSP_SoftwareDelay(5, BSP_DELAY_SECS);

if (true != ret)
{
    /* NG processing */
}

/* Delay 5 milliseconds before returning */
ret = R_BSP_SoftwareDelay(5, BSP_DELAY_MILLISECS);

if (true != ret)
{
    /* NG processing */
}

/* Delay 50 microseconds before returning */
ret = R_BSP_SoftwareDelay(50, BSP_DELAY_MICROSECS);

if (true != ret)
{
    /* NG processing */
}
```

```
}
```

### Special Notes:

None.

---

## 5.17 R\_BSP\_GetIClkFreqHz()

---

Returns the system clock frequency specified by the `r_bsp`.

### Format

```
uint32_t R_BSP_GetIClkFreqHz(void)
```

### Parameters

None.

### Return Values

System clock frequency specified by the `r_bsp`.

### Properties

Prototyped in file “`r_bsp_common.h`”

### Description

This function returns the system clock frequency which is specified by the `r_bsp` based on the information in `r_bsp_config.h`. Note that the frequency returned is not the one when this function is called.

For example, when the system clock is set to 120 MHz in `r_bsp_config.h` and the `r_bsp` has completed to specify the clock setting, then even if the user changed the system clock frequency to 60 MHz, the return value is not '60000000' but '120000000'.

### Reentrant

Yes.

### Example

```
uint32_t iclk;  
  
iclk = R_BSP_GetIClkFreqHz();
```

### Special Notes:

None.

### 5.18 R\_BSP\_StartupOpen()

Specifies settings to use the BSP and peripheral FIT modules. Call this function only when the BSP startup is disabled.

#### Format

```
void R_BSP_StartupOpen(void)
```

#### Parameters

None.

#### Return Values

None.

#### Properties

Prototyped in file “mcu\_startup.h”

#### Description

This function performs initialization for the interrupt callback, register protection, and the hardware and pins. These processing are needed for using the BSP and peripheral FIT modules. Thus, this function must be called in the beginning of the main function.

Call this function only when the BSP startup is disabled.

#### Reentrant

No.


#### Example

```
void main (void)
{
    R_BSP_StartupOpen();

    ...
}
```

Special Notes:

The R\_BSP\_StartupOpen function performs a part of processing in the PowerOn\_Reset\_PC function. The following shows the processing.

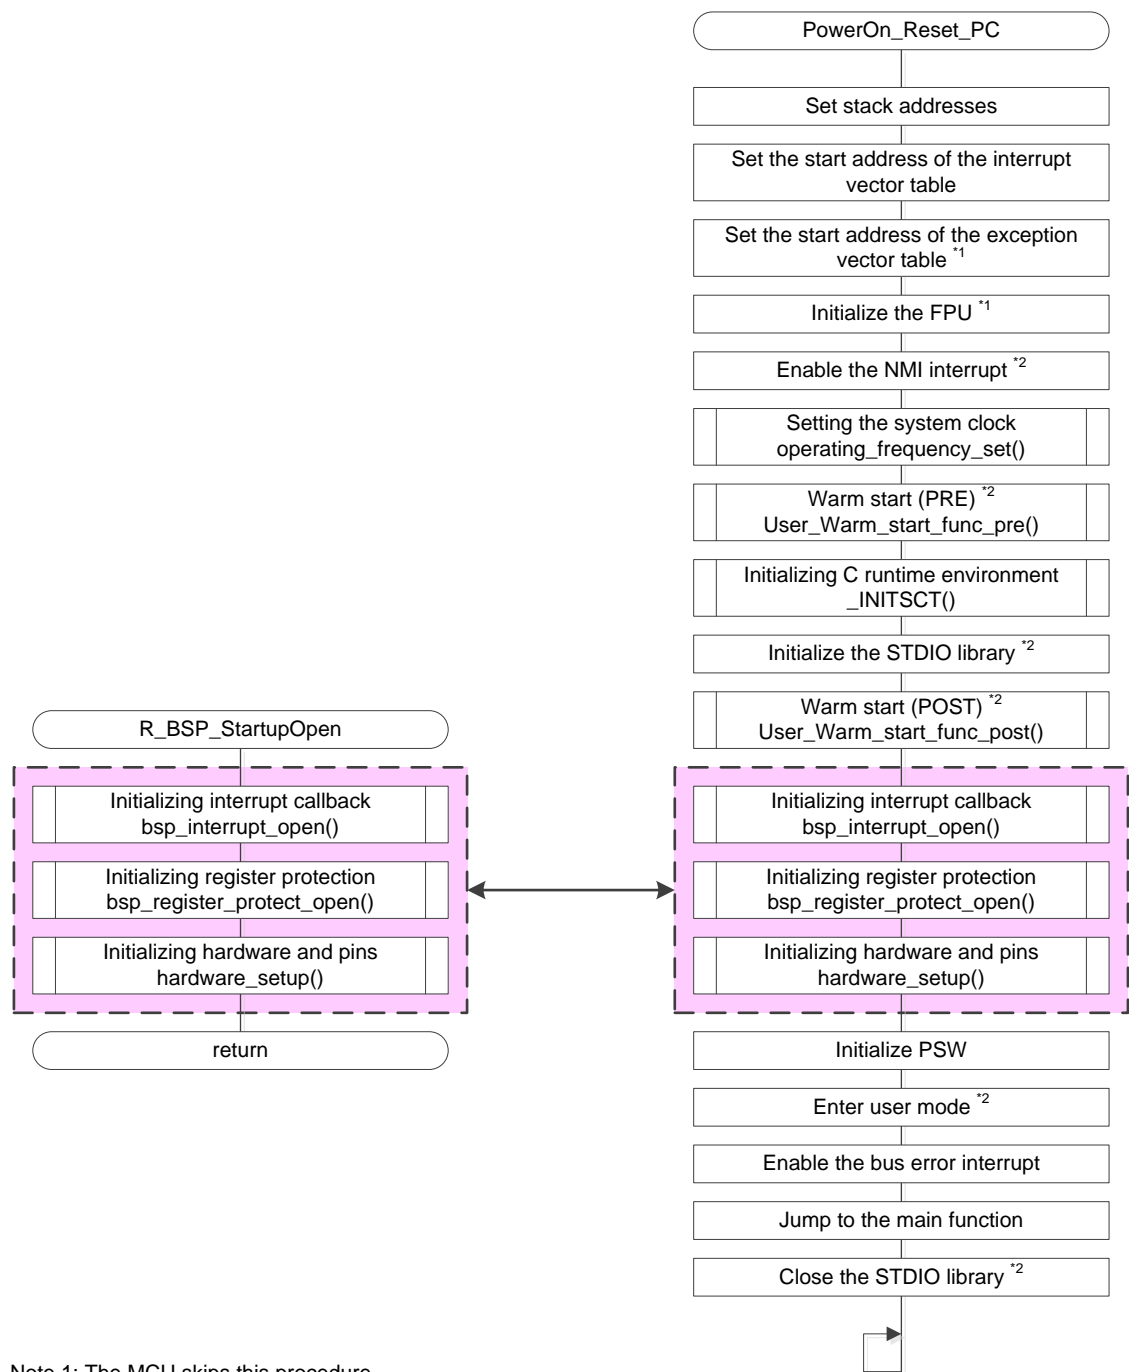

Note 1: The MCU skips this procedure.

Note 2: The operation varies depending on the setting in the r\_bsp\_config.h.

Figure 5.2 Processing of the R\_BSP\_StartupOpen Function

## 5.19 R\_BSP\_VoltageLevelSetting()

This API function is used excessively with the RX66T and RX72T. It makes settings to the voltage level setting register (VOLSR) that are necessary in order to use the USB, AD, and RIIC peripheral modules. Call this function only when it is necessary to change the register settings.

### Format

```
bool R_BSP_VoltageLevelSetting(uint8_t ctrl_ptn)
```

### Parameters

ctrl\_ptn

Register Setting Patterns

The following setting patterns cannot be selected at the same time.

When specifying more than one pattern at the same time, use the “|” (OR) operator.

- BSP\_VOL\_USB\_POWEROFF and BSP\_VOL\_USB\_POWERON
- BSP\_VOL\_AD\_NEGATIVE\_VOLTAGE\_INPUT and BSP\_VOL\_AD\_NEGATIVE\_VOLTAGE\_NOINPUT
- BSP\_VOL\_RIIC\_4\_5V\_OROVER and BSP\_VOL\_RIIC\_UNDER\_4\_5V

```
#define BSP_VOL_USB_POWEROFF      (0x01)          /* Updates the USBVON bit to 0. */
#define BSP_VOL_USB_POWERON      (0x02)          /* Updates the USBVON bit to 1. */
#define BSP_VOL_AD_NEGATIVE_VOLTAGE_INPUT  (0x04) /* Updates the PGAVLS bit to 0. */
#define BSP_VOL_AD_NEGATIVE_VOLTAGE_NOINPUT (0x08) /* Updates the PGAVLS bit to 1. */
#define BSP_VOL_RIIC_4_5V_OROVER (0x10)          /* Updates the RICVLS bit to 0. */
#define BSP_VOL_RIIC_UNDER_4_5V  (0x20)          /* Updates the RICVLS bit to 1. */
```

### Return Values

*true:* /\* Processing completed, register successfully updated. \*/

*false:* /\* The function was called under the following conditions, so the register setting was not updated. \*/

- Setting patterns that cannot be selected at the same time were selected.
- A setting pattern related to the USB was selected when the USB was not in the module stop state.
- A setting pattern related to the AD was selected when the AD was not in the module stop state.
- A setting pattern related to the RIIC was selected when the RIIC was not in the module stop state.

### Properties

Prototyped in file “cpu.h”

### Description

This function initializes the voltage level setting register (VOLSR), which is necessary in order to use the USB, AD and RIIC peripheral modules. When specifying a setting pattern related to the USB, call this function before the USB is released from the module stop state. When specifying a setting pattern related to the AD, call this function before the AD (unit 0 and unit 1) is released from the module stop state. When specifying a setting pattern related to the RIIC, call this function before the RIIC is released from the module stop state. If the function is called with a setting pattern related to the USB specified after the USB is released from the module stop state, the function returns “false” as the return value and does not update the register settings. If the function is called with a setting pattern related to the AD specified after the AD (unit 0 and unit 1) is released from the module stop state, the function returns “false” as the return value and does not update the register settings. Finally, if the function is called with a setting pattern related to the RIIC specified after the RIIC is released from the module stop state, the function returns “false” as the return value and does not update the register settings. In the BSP the initial settings are specified in accordance with the macro settings listed in 3.2.11, MCU Voltage, and 3.2.14, Negative Voltage Input Settings for AD Pins.

### Reentrant

No.

### Example

```
void main (void)
```



```
{
    bool ret;

    /* USBVON bit set to 1. */
    ret = R_BSP_VoltageLevelSetting(BSP_VOL_USB_POWERON);
    if (true != ret)
    {
        /* NG processing */
    }

    ...

    /* PGAVLS and USBVON bit set to 0. */
    ret = R_BSP_VoltageLevelSetting(BSP_VOL_AD_NEGATIVE_VOLTAGE_NOINPUT |
BSP_VOL_USB_POWEROFF);
    if (true != ret)
    {
        /* NG processing */
    }

    ...
}
```

### Special Notes:

None.

# 6. Project Setup

This section details adding the r\_bsp to your project.

---

## 6.1 Adding the FIT Module to Your Project

---


This module must be added to each project in which it is used. Renesas recommends the method using the Smart Configurator described in (1) or (3) below. However, the Smart Configurator only supports some RX devices. Please use the methods of (2) or (4) for RX devices that are not supported by the Smart Configurator.

- (1) Adding the FIT module to your project using the Smart Configurator in e<sup>2</sup> studio  
By using the Smart Configurator in e<sup>2</sup> studio, the FIT module is automatically added to your project. Refer to “Renesas e<sup>2</sup> studio Smart Configurator User Guide (R20AN0451)” for details.
- (2) Adding the FIT module to your project using the FIT Configurator in e<sup>2</sup> studio  
By using the FIT Configurator in e<sup>2</sup> studio, the FIT module is automatically added to your project. Refer to “Adding Firmware Integration Technology Modules to Projects (R01AN1723)” for details.
- (3) Adding the FIT module to your project using the Smart Configurator in CS+  
By using the Smart Configurator Standalone version in CS+, the FIT module is automatically added to your project. Refer to “Renesas e<sup>2</sup> studio Smart Configurator User Guide (R20AN0451)” for details.
- (4) Adding the FIT module to your project in CS+  
In CS+, please manually add the FIT module to your project. Refer to “Adding Firmware Integration Technology Modules to CS+ Projects (R01AN1826)” for details.


## 7. Adding r\_bsp manually

This section will give instruction on how to add the r\_bsp to an e<sup>2</sup> studio project manually (without use of the FIT Plug-in).


1. Copy the r\_bsp folder to your e<sup>2</sup> studio project's root. Once clicking Copy in Windows you can right-click on your project in e<sup>2</sup> studio and click Paste.

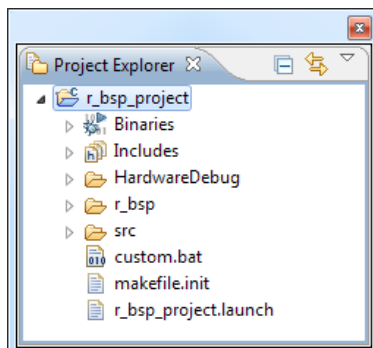


2. Expand the r\_bsp >> board folder and delete all of the folders except the one for the board you are using. You can leave the 'user' directory if you wish to have a directory to start off with when you create your own BSP.
3. Expand the r\_bsp >> mcu folder and delete all of the folders except the one for your MCU group and the one named all.

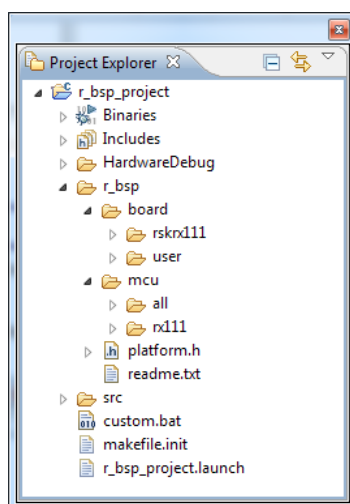

4. It is recommended to create a directory to store all FIT configuration files. Having one place for configuration files make them easy to find and easy to backup. The default name for this folder is r\_config. If an r\_config folder was not included in your r\_bsp zip file then we will create one here. Create an r\_config folder for your project by right-clicking on your project and choosing New >> Folder. In the window that pops up enter 'r\_config' for the folder name and click Finish.
5. We will now setup include paths for the r\_bsp and r\_config folders. Right-click on your project and click Properties.
6. Under 'Tool Settings' select Compiler >> Source.
7. In the 'Include file directories' box click the 'Add' button.

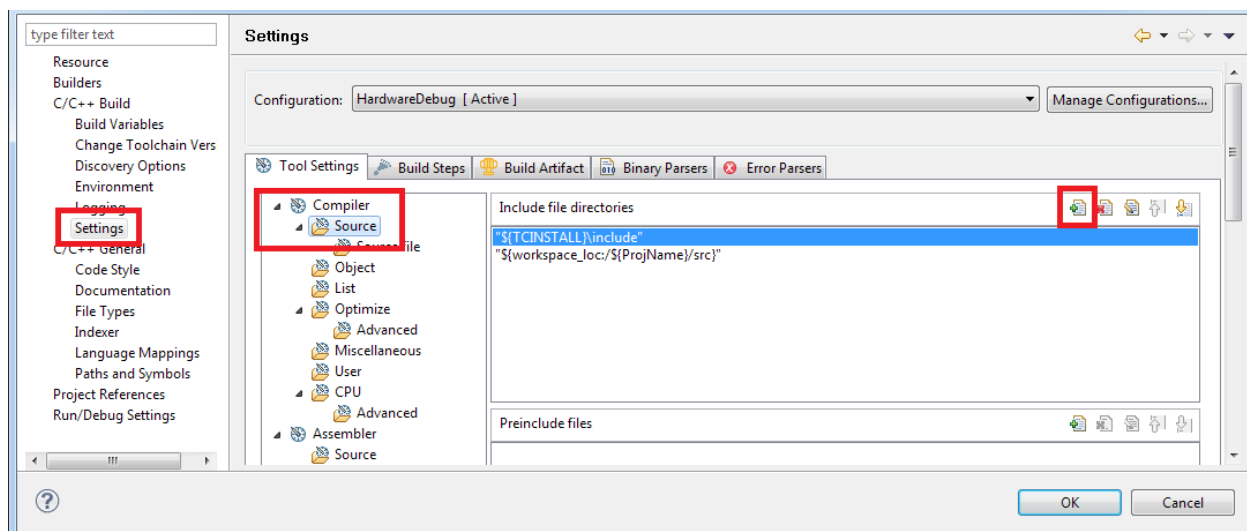

8. The 'Add directory path' window will pop up; click the Workspace button.
9. In the 'Folder selection' window choose the `r_bsp` folder and click OK.

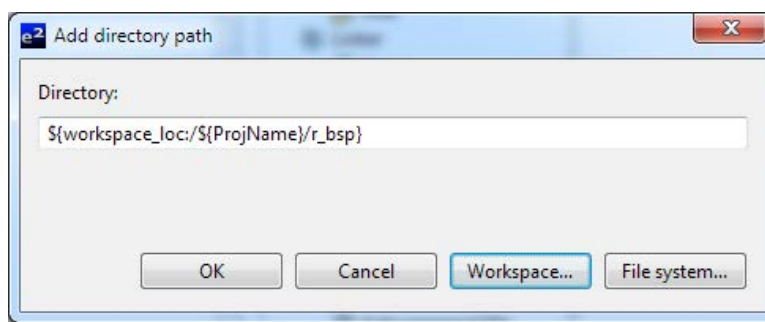


10. Verify that your window looks like the one above and click OK.
11. Back in the main Properties window verify that you now have an include path for the `r_bsp`.
12. Follow the same steps to add an include path for the `r_config` folder.
13. Back in the main Properties window verify that you now have an include path for the `r_bsp` and `r_config` folders and click Apply. Click OK to return to your project.
14. Which board is being used needs to be selected in the `platform.h` header file. Open up `platform.h` and uncomment the `#include` for the board you are using. In this example the RSKRX111 is being used so the `#include` for `"./board/rskrx111/r_bsp.h"` is uncommented.

```


86 /* RSKRX63N */
87 // #include "../board/rskrx63n/r_bsp.h"
88
89 /* RSKRX63T_64PIN */
90 // #include "../board/rskrx63t_64pin/r_bsp.h"
91
92 /* RSKRX63T_144PIN */
93 // #include "../board/rskrx63t_144pin/r_bsp.h"
94
95 /* RDKRX63N */
96 // #include "../board/rdkrx63n/r_bsp.h"
97
98 /* RSKRX210 */
99 // #include "../board/rskrx210/r_bsp.h"
100
101 /* RSKRX111 */
102 #include "../board/rskrx111/r_bsp.h"

```

15. In order to configure the `r_bsp` the user needs to create an `r_bsp_config.h` file. Copy the `r_bsp_config_reference.h` file from your `board` folder and paste it into the `r_config` folder. Right-click on the file in the `r_config` folder and click Rename. Rename the file to `r_bsp_config.h`. If the MCU has an `r_bsp_interrupt_config_reference.h` file, copy that file as well and rename it to `r_bsp_interrupt_config.h`.

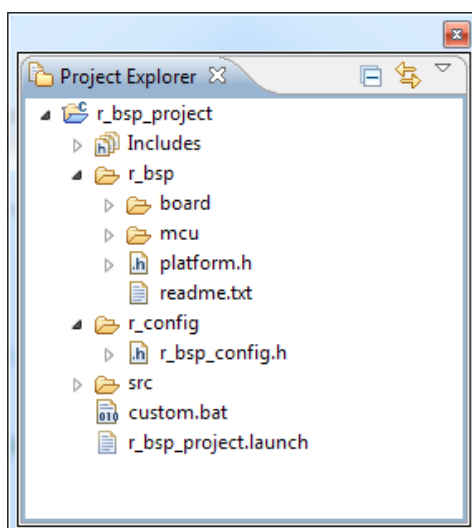

16. Configure the `r_bsp` for your board by going through and modifying the `r_bsp_config.h` file as needed.
17. For RX64M, RX65N and RX71M MCU's configuring the bsp requires that the user also create an `r_bsp_interrupt_config.h` file. Copy the `r_bsp_interrupt_config_reference.h` file from your `board` folder and paste it into the `r_config` folder. Right-click on the file in the `r_config` folder and click Rename. Rename the file to `r_bsp_interrupt_config.h`.

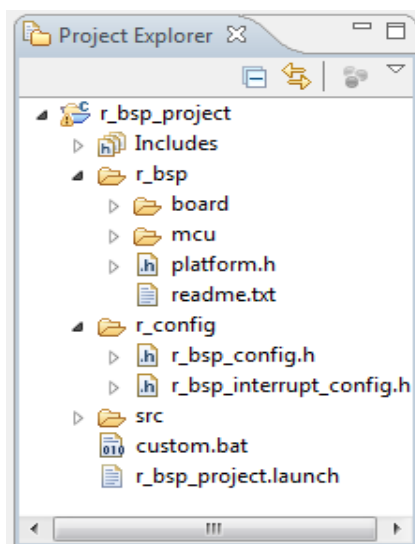

18. Configure the software configurable interrupts for your RX64M/RX65N/RX71M board by going through and modifying the *r\_bsp\_interrupt\_config.h* file as needed.
19. Build the project.


### 7.1 Creating a BSP Module for a Custom Board

This section describes how to create a custom BSP.

When there is a *generic* folder for the MCU used, create a project selecting the Generic board (refer to the procedure in 6. Project Setup).

When there is no *generic* folder for the MCU used, create a project following the procedure below. This section describes an example procedure using the RX111 MCU.

The figure below shows the procedure for creating a bsp for a custom board.

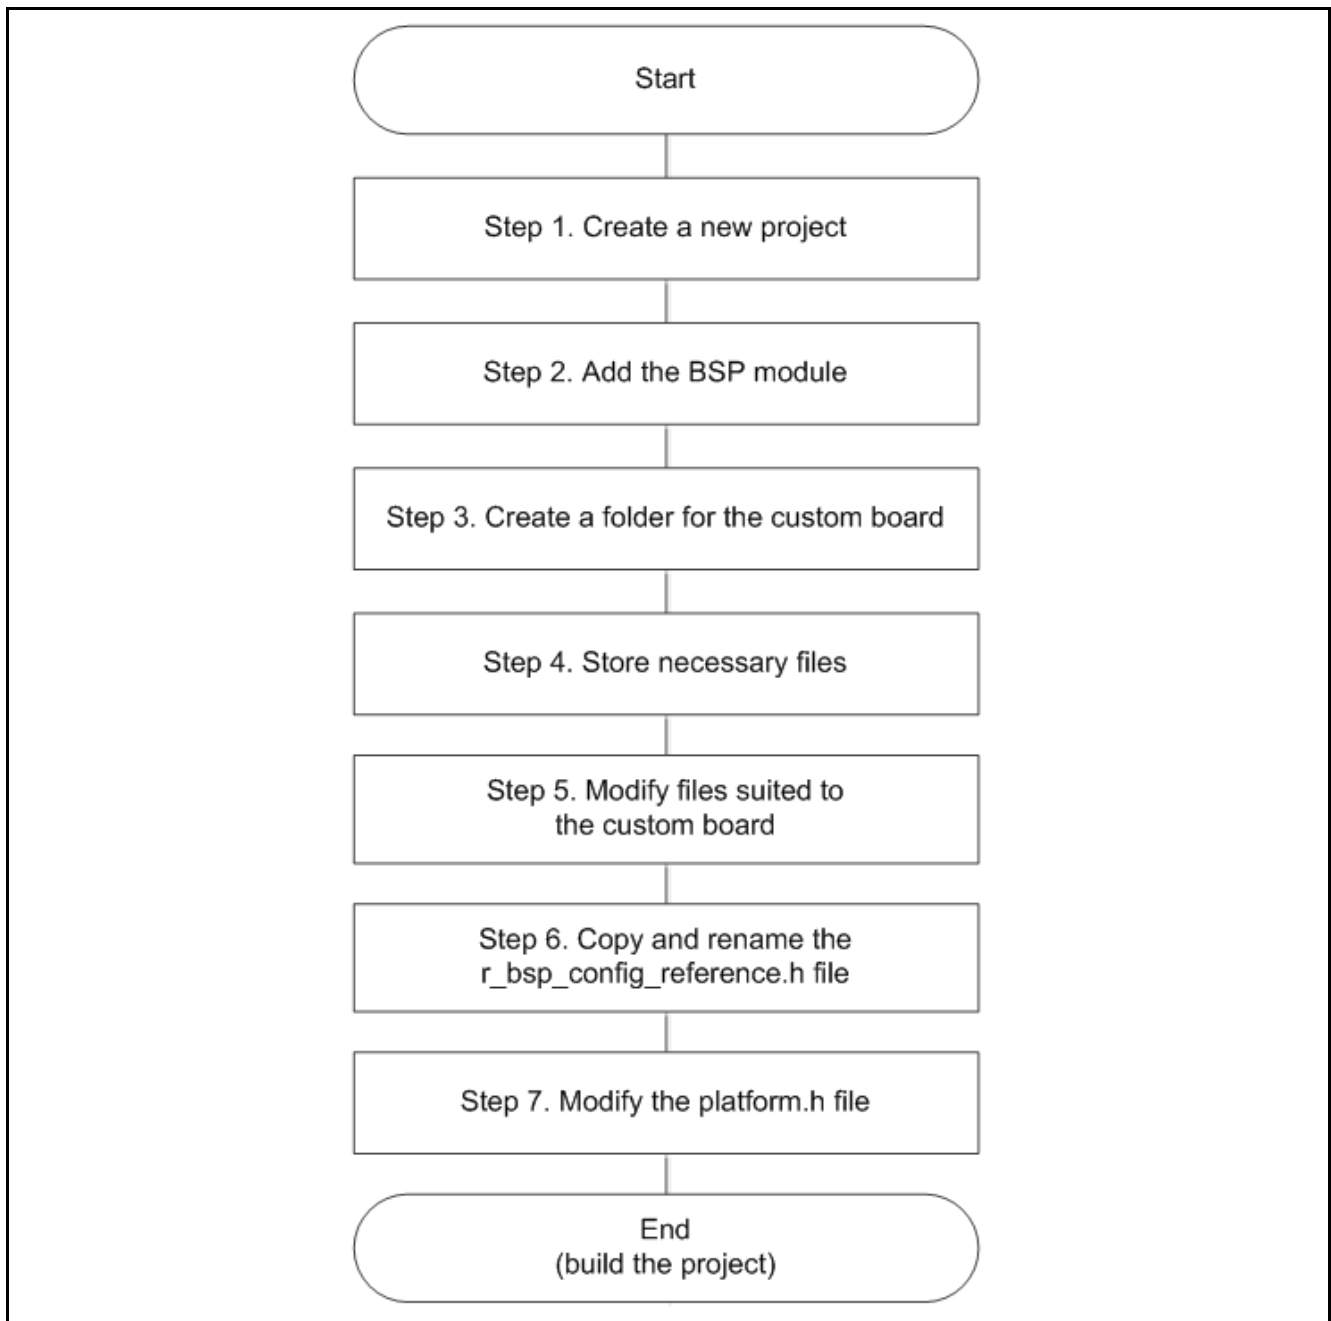

## RX Family Board Support Package Module Using Firmware Integration Technology

### Step 1. Create a New Project (Mandatory)

To create a new project, refer to "Creating Empty Project" in the "Board Support Package Module Using Firmware Integration Technology" application note (R01AN1685).


### Step 2. Add the BSP Module (Mandatory)

To add the BSP module to the new project (user project) created in step 1, refer to "Adding r\_bsp with e<sup>2</sup> studio FIT Plug-in" in the "Board Support Package Module Using Firmware Integration Technology" application note (R01AN1685).

Choose the following options when adding the BSP module on the FIT plug-in.

- Family, Series, Group: MCU used.
- Target Board: MCU board used.

For example, when using the RX111 to create the user board, choose "RSKRX111" or "RSKRX64M". By choosing the appropriate options here, the board folder for the custom board can be created easily.

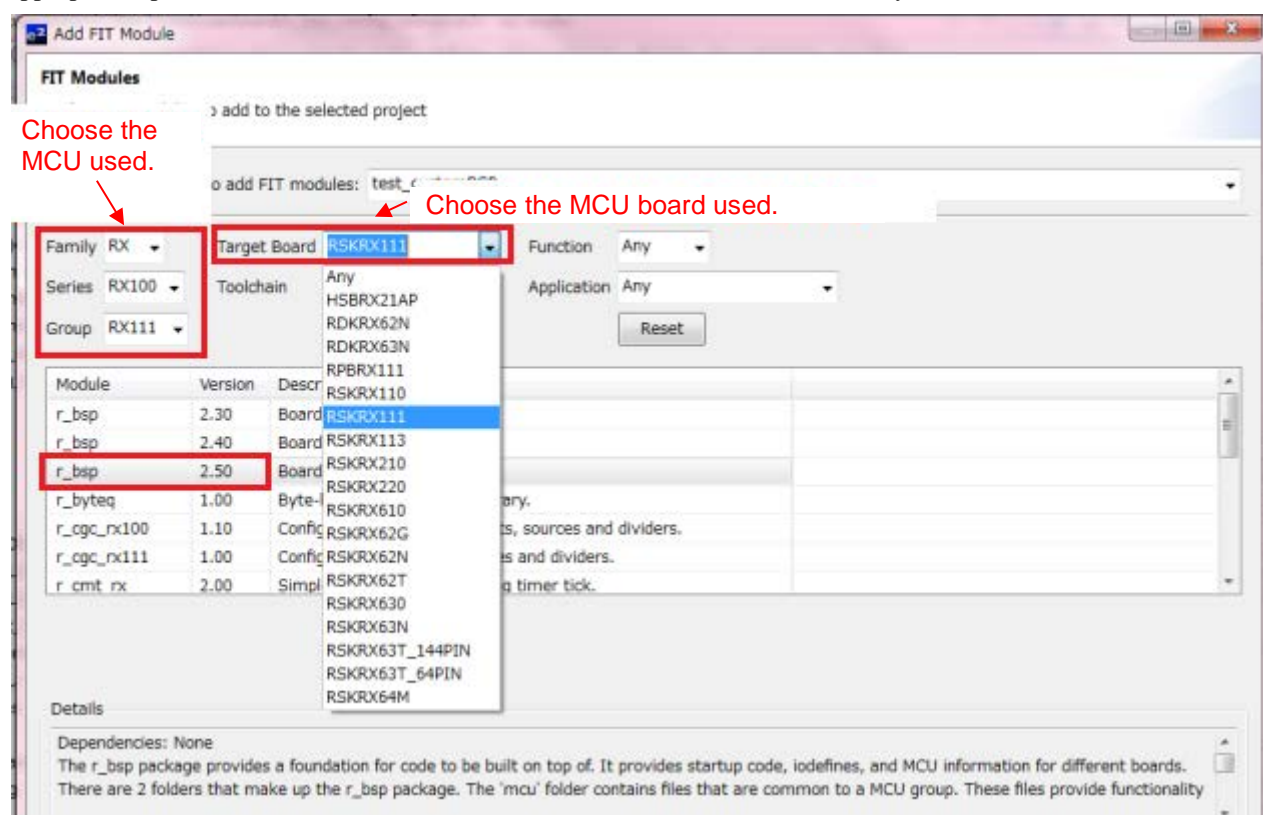




### Step 3. Create a Folder for the Custom Board

The r\_bsp folder should now be present in the user project. Below, the board folder under the r\_bsp folder is modified to create the custom BSP. The code in the mcu folder does not require modification.

- 1) Confirm that the board folder (rskrx111 here) specified in step 2 and the user folder are generated in the board folder under the r\_bsp folder.
- 2) Use the user folder as the folder for the custom board (optional).

Rename the folder name (optional). The folder name does not have to be changed.

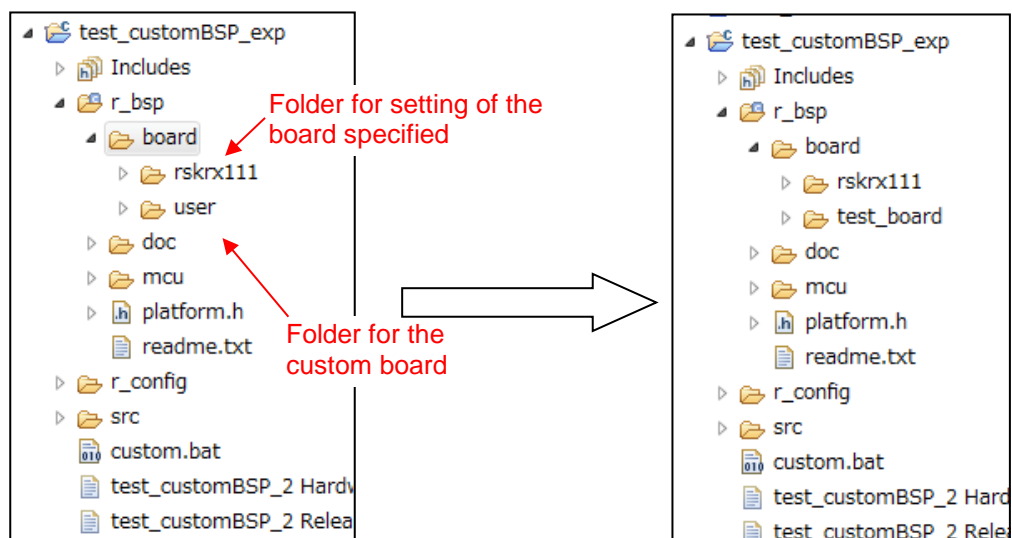


Folder structure after the BSP module is added.

Example when the folder name is changed for the custom board

### Step 4. Store Necessary Files (Mandatory)


Store necessary files in the folder created in step 3.

- 1) Copy all files in the rskrx111 folder and paste them in the folder for the custom board. Then overwrite the r\_bsp.h file.

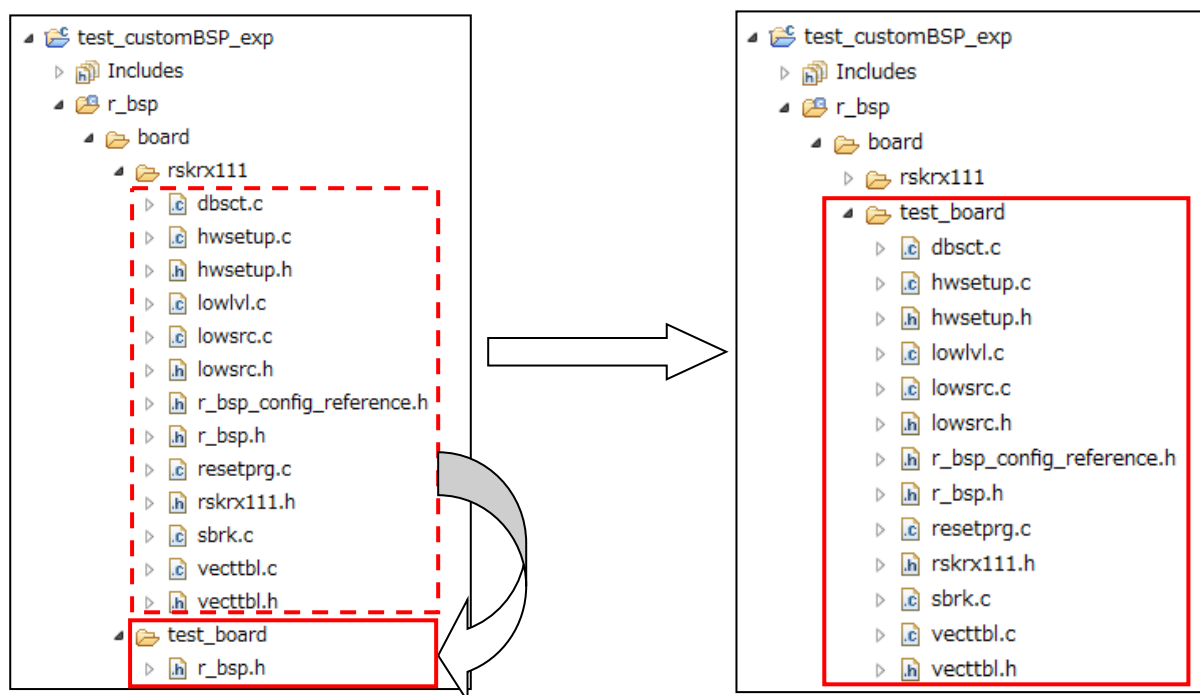

- 2) Exclude the rskrx111 folder from build.

(The folder can be deleted if it is not necessary after the folder for the custom board is created.)

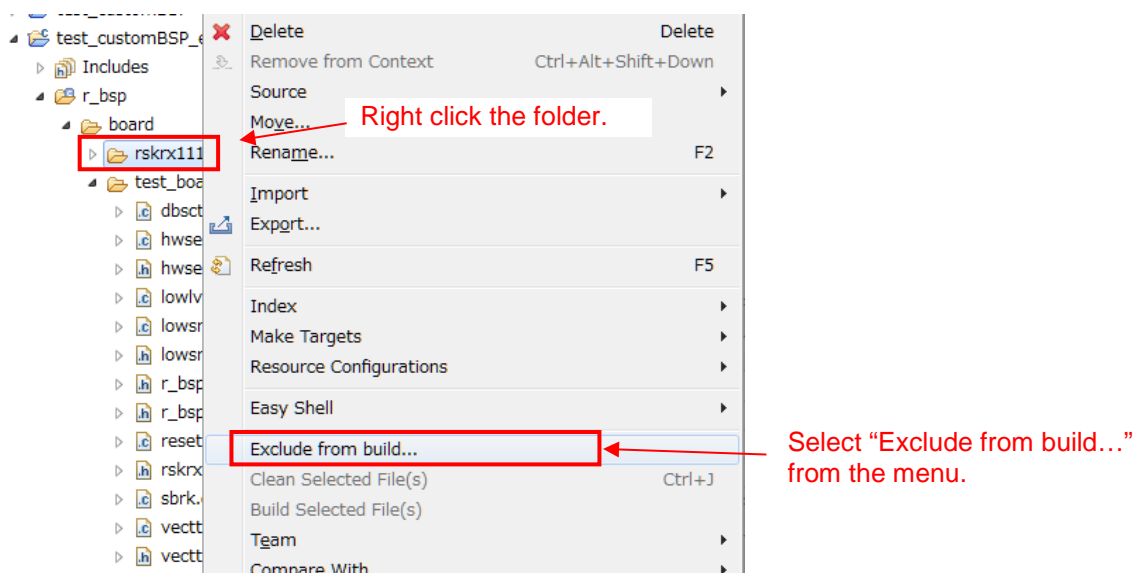

### Step 5. Modify Files Suited to the Custom Board (Mandatory)

Modify the following four files suited to the custom board.

#### 1. hwsetup.c

This file executes the following four functions.

- **Function: output\_ports\_configure**

This function initializes ports used for LEDs, switches, SCI, and ADC.

Ports need to be configured with either of procedures below according to the board used.

If not configuring pins in this function:

- 1) Comment out or delete the function declaration of the output\_ports\_configure function.
- 2) Delete the output\_ports\_configure function which is called in the hardware\_setup function.
- 3) Comment out or delete the output\_ports\_configure function.

Then configure settings described in "2. \*board\_specific\_defines\*.h" as well.

If configuring pins in this function:

- 1) Comment out or delete the source code in the output\_ports\_configure function.
- 2) Configure pins according to the board used.

- **Function: bsp\_non\_existent\_port\_init**

This function initializes nonexistent ports. No additional processing is required for this function.

- **Function: interrupts\_configure**

This function configures interrupt settings which are performed prior to the main function.

When such settings are required, add the settings in this function.

- **Function: peripheral\_modules\_enable**

This function configures settings for peripheral functions which are performed prior to the main function.

When such settings are required, add the settings in this function.

Examples of processing are shown below when not configuring pins in the output\_ports\_configure function.

```
/* *****  
Private global variables and functions  
***** */  
/* MCU I/O port configuration function declaration */  
static void output_ports_configure(void);  
  
/* Interrupt configuration function declaration */  
static void interrupts_configure(void);  
  
/* MCU peripheral module configuration function declaration */  
static void peripheral_modules_enable(void);
```

← Comment out or delete this part.

```

/*****
 * Function name: hardware_setup
 * Description : Contains setup functions called at device restart
 * Arguments : none
 * Return value : none
 *****/
void hardware_setup(void)
{
    output_ports_configure();
    interrupts_configure();
    peripheral_modules_enable();
    bsp_non_existent_port_init();
}

```

← Comment out or delete this line.

```

static void output_ports_configure(void)
{
    /* Enable LEDs. */
    /* Start with LEDs off. */
    LED0 = LED_OFF;
    LED1 = LED_OFF;
    LED2 = LED_OFF;
    LED3 = LED_OFF;

    /* Set LED pins as outputs. */
    LED0_PDR = 1;
    LED1_PDR = 1;
    LED2_PDR = 1;
    LED3_PDR = 1;

    /* Enable switches. */
    /* Set pins as inputs. */
    SW1_PDR = 0;
    SW2_PDR = 0;
    SW3_PDR = 0;

    /* Set port mode registers for switches. */
    SW1_PMR = 0;
    SW2_PMR = 0;
    SW3_PMR = 0;

    /* Unlock MPC registers to enable writing to them. */
    R_BSP_RegisterProtectDisable(BSP_REG_PROTECT_MPC);

    /* TXD1 is output. */
    PORT1.PMR.BIT.B6 = 0;
    MPC.P16PFS.BYTE = 0x0A;
    PORT1.PDR.BIT.B6 = 1;
    PORT1.PMR.BIT.B6 = 1;
    /* RXD1 is input. */
    PORT1.PMR.BIT.B5 = 0;
    MPC.P15PFS.BYTE = 0x0A;
    PORT1.PDR.BIT.B5 = 0;
    PORT1.PMR.BIT.B5 = 1;

    /* Configure the pin connected to the ADC Pot as an analog input */
    #if (BSP_CFG_BOARD_REVISION == 0)
        PORT4.PMR.BIT.B4 = 0;
        MPC.P44PFS.BYTE = 0x80; //Set ASEL bit and clear the rest
        PORT4.PDR.BIT.B4 = 0;
    #elif (BSP_CFG_BOARD_REVISION == 1)
        PORT4.PMR.BIT.B0 = 0;
        MPC.P40PFS.BYTE = 0x80; //Set ASEL bit and clear the rest
        PORT4.PDR.BIT.B0 = 0;
    #endif
}

```

← Comment out or delete this part.

### 2. \*board\_specific\_defines\*.h

The board used becomes the name of this file (e.g. rskrx111.h). This file has definitions of pins used for switches, LEDs, and so on, and their settings vary depending on the board used.

However this file is not necessary when using the custom board. Perform the following steps.

- 1) Delete the \*board\_specific\_defines\*.h file from the folder for the custom board.
- 2) Delete the following line in the r\_bsp.h file.

```
#include "board/rskrx111/rskrx111.h"
```

### 3. r\_bsp.h

This header file is included in platform.h and has all #includes required for the board and the MCU. The include paths associated with the board need to be modified.

- 1) Modify the include paths which start with "board/" as follows:

Change the path to "board/*name of the folder for the custom board*/file name".

Example:

Before modification: **#include** "board/rskrx111/rskrx111.h"

After modification: **#include** "board/test\_board/rskrx111.h"

```

/*****
INCLUDE APPROPRIATE MCU AND BOARD FILES
*****/
#include "mcu/all/r_bsp_common.h"
#include "r_bsp_config.h"
#include "mcu/rx111/register_access/iodef.h"
#include "mcu/rx111/mcu_info.h"
#include "mcu/rx111/mcu_locks.h"
#include "mcu/rx111/locking.h"
#include "mcu/rx111/cpu.h"
#include "mcu/rx111/mcu_init.h"
#include "mcu/rx111/mcu_interrupts.h"
#include "board/test_board/rskrx111.h"
#include "board/test_board/hwsetup.h"
#include "board/test_board/lowsrc.h"
#include "board/test_board/vecttbl.h"
#endif /* BSP_BOARD_RSKRX111 */

```

Change this part to the folder name for the custom board.

## RX Family Board Support Package Module Using Firmware Integration Technology

### 4. r\_bsp\_config\_reference.h

This header file has settings to provide default options of the board. Macro definitions that are included in this file and need to be modified according to the custom board are listed in the table below. Change the settings as required.

For example, when the setting in the copied board folder uses the PLL as the system clock while the user system uses the HOCO, change the clock setting for BSP\_CFG\_CLOCK\_SOURCE from PLL to HOCO.

Also confirm usage conditions for macros not in the table below and modify them as required.

**Table 7.1 Macros to be modified to reflect the Custom Board**

Macro	Description
BSP_CFG_CLOCK_SOURCE	Selects a crystal on the board and a clock source.
BSP_CFG_XTAL_HZ	Specifies a value according to the crystal on the board (default value: RSK setting).
BSP_CFG_PLL_DIV	When using the PLL: Specifies an available setting value using the crystal on the board.
BSP_CFG_PLL_MUL	When using the PLL: Specifies an available setting value using the crystal on the board.
BSP_CFG_ICK_DIV	Specifies an available setting value using the crystal on the board.
BSP_CFG_PCKB_DIV	Specifies an available setting value using the crystal on the board.
BSP_CFG_PCKD_DIV	Specifies an available setting value using the crystal on the board.
BSP_CFG_FCK_DIV	Specifies an available setting value using the crystal on the board.

### Step 6. Copy and Rename the r\_bsp\_config\_reference.h File (Mandatory)

After step 5, copy the r\_bsp\_config\_reference.h file, paste it in the r\_config folder, and rename the copied file to "r\_bsp\_config.h".

### Step 7. Modify the platform.h File (Mandatory)

This header file needs to be modified to specify the r\_bsp.h file in the newly created folder for the custom board. Follow the steps below for the modification.

- 1) Uncomment the line under the comment "/\* User Board - Define your own board here. \*/".
- 2) Change the folder name after "board/" to the folder name for the custom board.

Before modification:

```
/* User Board - Define your own board here. */  
//#include "../board/user/r_bsp.h"
```

After modification:


```
/* User Board - Define your own board here. */  
#include "../board/test_board/r_bsp.h"
```

## 8. Adding FIT Modules to the User Project


This section describes how to add the FIT module to the user project. The procedure to add the peripheral FIT module to the existing user project without creating a new project is described. The FIT configurator in the e<sup>2</sup> studio is used to add the FIT module.

### Step 1. Adding the FIT module using the FIT configurator

1. Click Renesas Views >> e2 solution toolkit >> FIT Configurator to open the FIT configurator.
2. Select the user created project from the list in the 'Name of the project to add FIT modules' field.
3. Select a GENERIC board from the list in the 'Target Board' field.
4. Select the *r\_bsp* and the peripheral FIT module from the 'Available Modules' pane and click the Add Module button.
5. Confirm that the *r\_bsp* and the peripheral FIT module selected are displayed in the 'Selected Modules' pane, and click the Generate Code button.

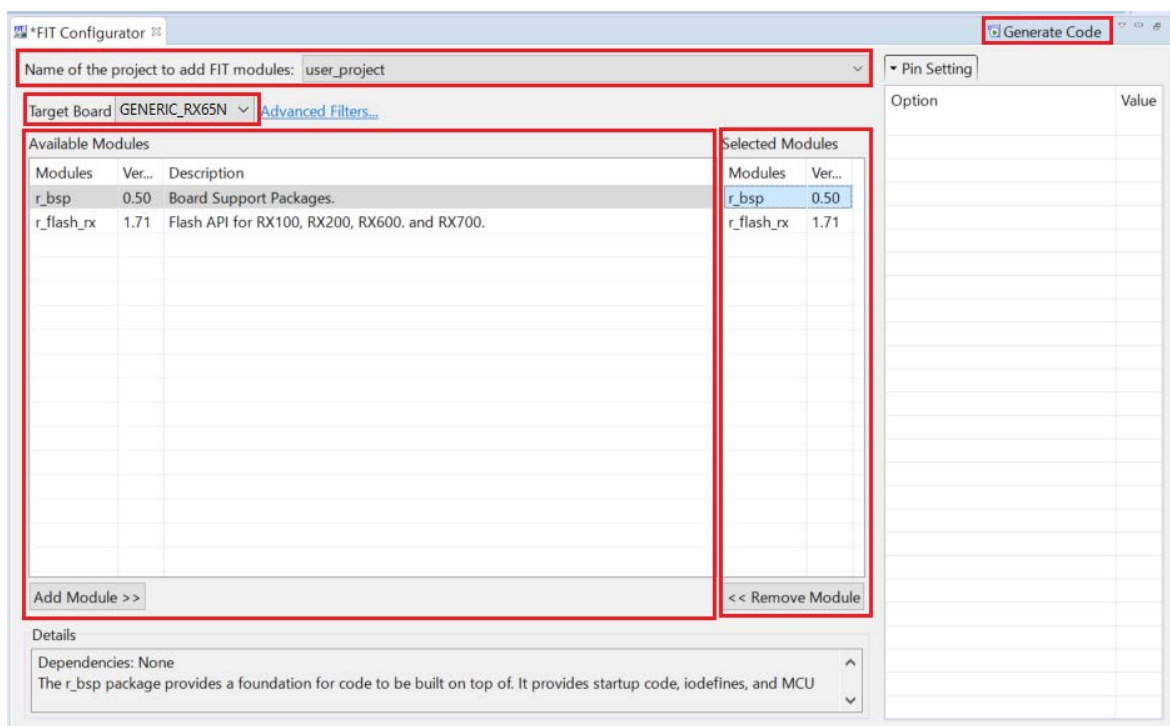


6. Check the contents for code generation in the 'FIT Generation – Summary' window and click OK.

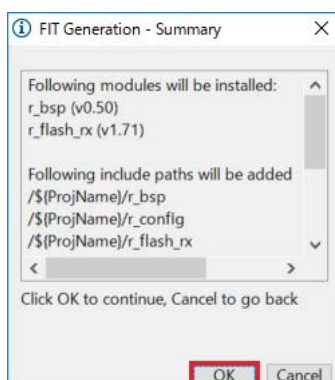


7. When the 'FIT project toolchain settings' window appears, click **Cancel**.

This window appears when the necessary settings to use the BSP and FIT modules have not been done. Settings for the compiler option and the Standard library option are described in "Step 2. Setting the Project Environment".

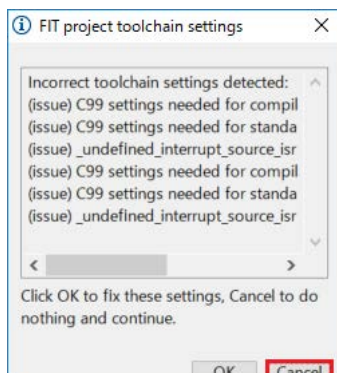


### Step 2. Setting the Project Environment

1. Select Renesas Tool Setting (click the e<sup>2</sup> icon on the menu bar) to open the 'Properties for <project name>' window and select  
C/C++ Build >> Settings >> Tool Settings (tab) >> Compiler >> Source >> Source file, and then specify 'C99' in the 'C:' field. The FIT module assumes 'C99' to be specified for the C language setting.

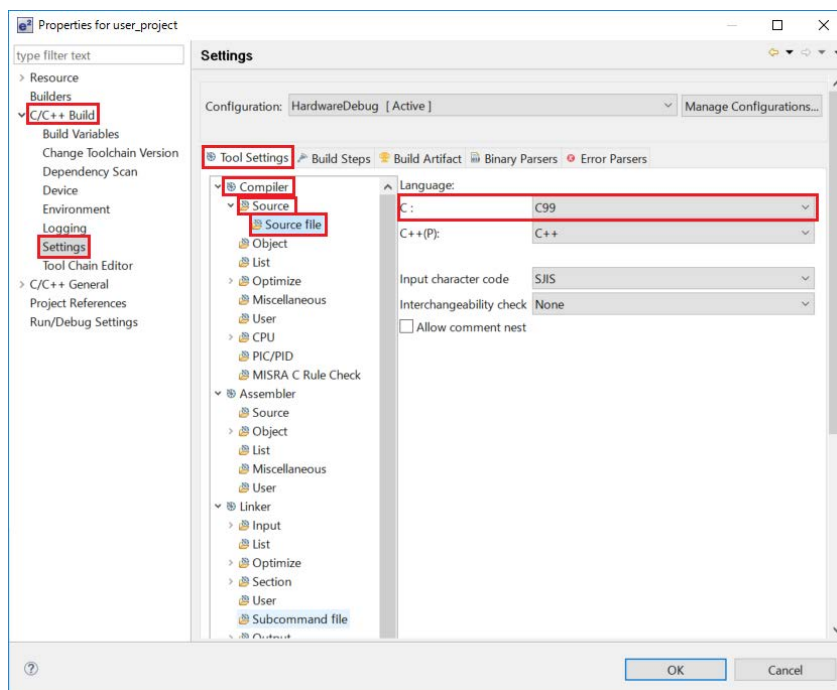



2. Select Renesas Tool Setting (click the e<sup>2</sup> icon on the menu bar) to open the ‘Properties for <project name>’ window and select C/C++ Build >> Settings >> Tool Settings >> Standard Library >> Contents, and then specify ‘C99’ in the ‘Library configuration’ field. The FIT module assumes ‘C99’ to be specified for the library setting for C language.

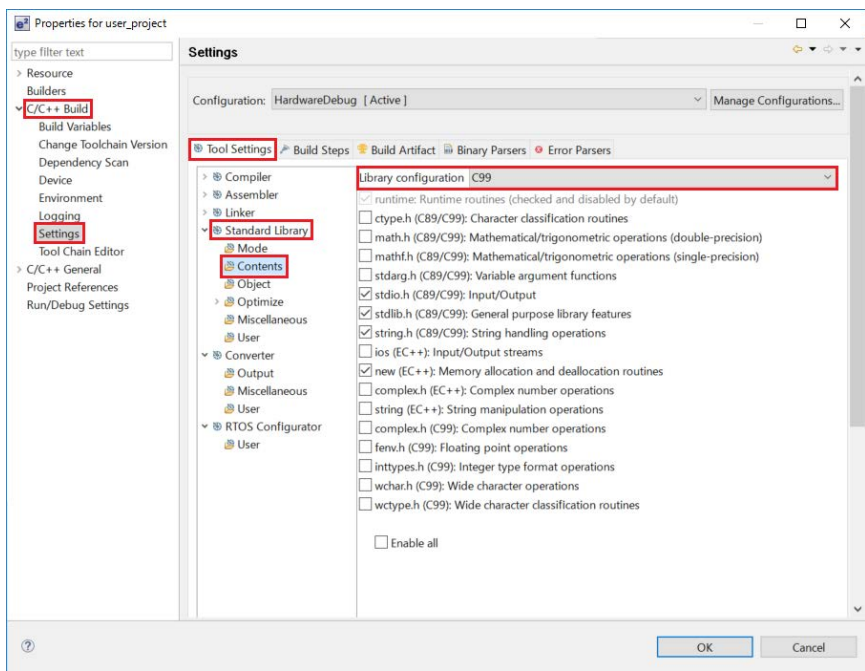

3. Specify sections for the FIT module.

When the FIT module project is generated in the e<sup>2</sup> studio, sections for the FIT module will be specified. FIT module assumes these sections are used for the project.

Table 8-1 lists the Sections for the FIT module.

**Table 8-1 Sections for the FIT module**

Address	Section Name
0x00000004	SU
	SI
	B_1
	R_1
	B_2
	R_2
	B
	R
0xFFxxxxx *1	C_1
	C_2
	C
	C\$*
	D*
	W*
	L
	P*
0xFFFFFFFF80	EXCEPTVECT / FIXEDVECT *2
0xFFFFFFFFFC *3	RESETVECT *3

Note 1. The address varies depending on the device selected when generating the project.

Note 2. Section names are different between RXv2 core and RXv1 core. The section names are EXCEPTVECT for RXv2 and FIXEDVECT for RXv1.

Note 3. This is only specified when RXv2 core is selected.

For device CPU, refer to the Features section in the User's Manual: Hardware.

---

### Step 3. Startup disable

---

1. Disable the BSP startup. See Section 2.23.1 Setting the Startup Disable Function for details.



---

### Notes

---

1. When the code is generated with the FIT configurator, include paths necessary for using the FIT module are automatically added.

To check include paths added, select Renesas Tool Setting (click the e<sup>2</sup> icon on the menu bar) to open the 'Properties for <project name>' window and select C/C++ General >> Path and Symbols, and then check the paths in the 'Includes' and the 'Source and Location' tabs.

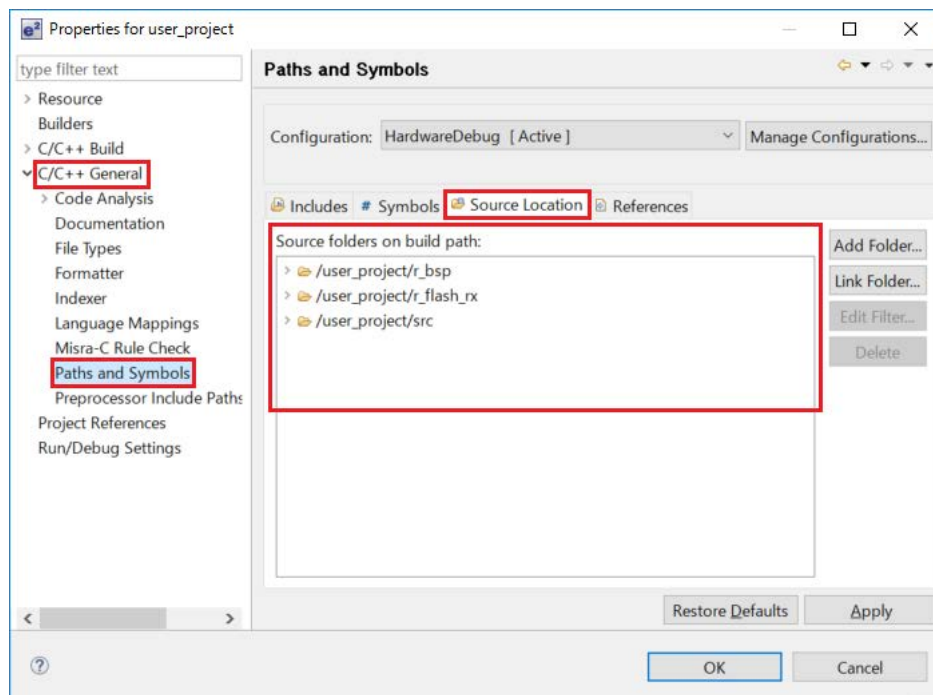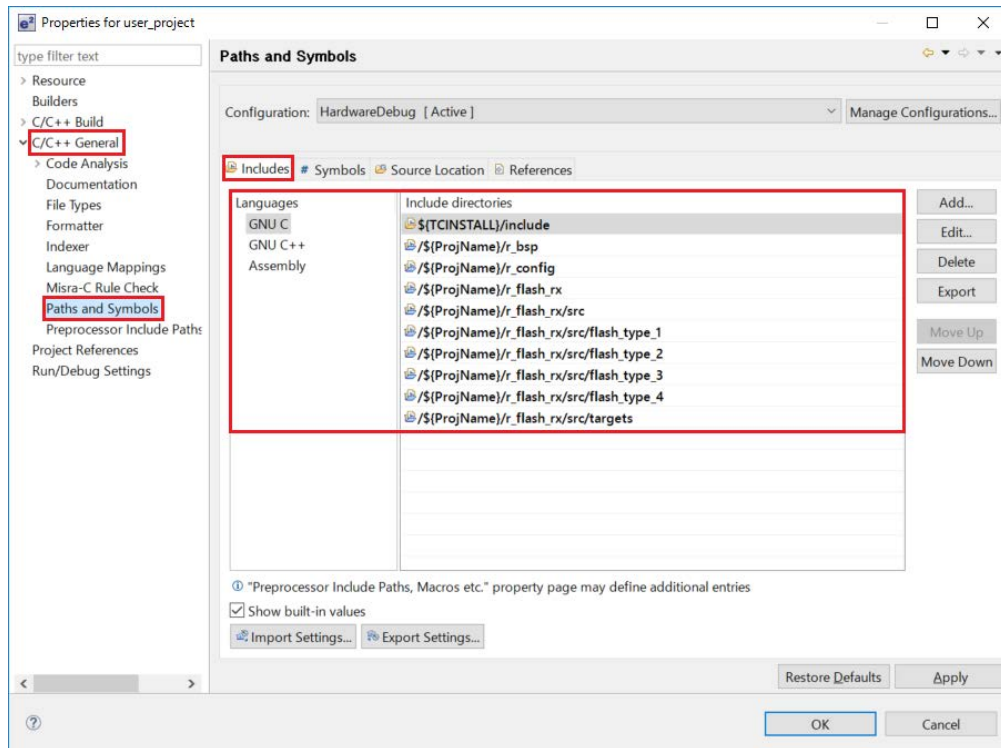

## 9. Appendices

### 9.1 Confirmed Operation Environment

This section describes confirmed operation environment for this module.

**Table 9.1 Confirmed Operation Environment (Rev.3.10)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 4.1.0.018
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V2.03.00 Compiler option: The following option is added to the default settings of the integrated development environment. ● -lang = C99
Endian	Big endian/little endian
Revision of the module	Rev.3.10
Board used	Renesas Starter Kit for RX130 (product No.: RTK5005130SxxxxxBE)

**Table 9.2 Confirmed Operation Environment (Rev.3.20)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 4.1.0.018
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V2.03.00 Compiler option: The following option is added to the default settings of the integrated development environment. ● -lang = C99
Endian	Big endian/little endian
Revision of the module	Rev.3.20
Board used	Renesas Starter Kit for RX24T (product No.: RTK500524TSxxxxxBE)

**Table 9.3 Confirmed Operation Environment (Rev.3.30)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 4.2.0.012
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V2.03.00 Compiler option: The following option is added to the default settings of the integrated development environment. ● -lang = C99
Endian	Big endian/little endian
Revision of the module	Rev.3.30
Board used	Renesas Starter Kit for RX231 (product No.: R0K505231SxxxBE)

## **RX Family Board Support Package Module Using Firmware Integration Technology**

**Table 9.4 Confirmed Operation Environment (Rev.3.31)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 4.3.0.007
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V2.03.00 Compiler option: The following option is added to the default settings of the integrated development environment. <ul style="list-style-type: none"><li>● -lang = C99</li></ul>
Endian	Big endian/little endian
Revision of the module	Rev.3.31
Board used	Renesas Starter Kit for RX23T (product No.: RTK500523TSxxxxxBE)

**Table 9.5 Confirmed Operation Environment (Rev.3.40)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 5.0.1.005
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V2.05.00 Compiler option: The following option is added to the default settings of the integrated development environment. <ul style="list-style-type: none"><li>● -lang = C99</li></ul>
Endian	Big endian/little endian
Revision of the module	Rev.3.40
Board used	Renesas Starter Kit+ for RX65N (product No.: RTK500565NSxxxxxBE)

**Table 9.6 Confirmed Operation Environment (Rev.3.50)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 5.2.0.020
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V2.06.00 Compiler option: The following option is added to the default settings of the integrated development environment. <ul style="list-style-type: none"><li>● -lang = C99</li></ul>
Endian	Big endian/little endian
Revision of the module	Rev.3.50
Board used	Renesas Starter Kit for RX24T (product No.: RTK500524TSxxxxxBE) Renesas Starter Kit for RX24U (product No.: RTK500524USxxxxxBE)

## RX Family Board Support Package Module Using Firmware Integration Technology

**Table 9.7 Confirmed Operation Environment (Rev.3.60)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 5.4.0.015 (RX130) Renesas Electronics e <sup>2</sup> studio Version 6.0.0.001 (RX65N)
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V2.07.00 Compiler option: The following option is added to the default settings of the integrated development environment. <ul style="list-style-type: none"><li>● -lang = C99</li></ul>
Endian	Big endian/little endian
Revision of the module	Rev3.60
Board used	Renesas Starter Kit for RX130 (product No.: RTK5005130SxxxxxBE) Renesas Starter Kit for RX130-512KB (product No.: RTK5051308SxxxxxBE) Renesas Starter Kit+ for RX65N (product No.: RTK500565NSxxxxxBE) Renesas Starter Kit+ for RX65N-2MB (product No.: RTK50565N2SxxxxxBE)

**Table 9.8 Confirmed Operation Environment (Rev.3.70)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 6.1.0
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V2.07.00 Compiler option: The following option is added to the default settings of the integrated development environment. <ul style="list-style-type: none"><li>● -lang = C99</li></ul>
Endian	Big endian/little endian
Revision of the module	Rev3.70
Board used	Renesas Starter Kit for RX111 (product No.: R0K505111SxxxBE) Renesas Starter Kit for RX113 (product No.: R0K505113SxxxBE) Renesas Starter Kit for RX130 (product No.: RTK5005130SxxxxxBE) Renesas Starter Kit for RX130-512KB (product No.: RTK5051308SxxxxxBE) Renesas Starter Kit for RX231 (product No.: R0K505231SxxxBE) Renesas Starter Kit for RX23T (product No.: RTK500523TSxxxxxBE) Renesas Starter Kit for RX24T (product No.: RTK500524TSxxxxxBE) Renesas Starter Kit for RX24U (product No.: RTK500524USxxxxxBE) Renesas Starter Kit+ for RX64M (product No.: R0K50564MSxxxBE) Renesas Starter Kit+ for RX71M (product No.: R0K50571MSxxxBE) RX65N Envision Kit (product No.: RTK5RX65N2CxxxxxBR)

**Table 9.9 Confirmed Operation Environment (Rev.3.71)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 6.1.0
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V2.07.00 Compiler option: The following option is added to the default settings of the integrated development environment. <ul style="list-style-type: none"><li>● -lang = C99</li></ul>
Endian	Big endian/little endian
Revision of the module	Rev3.71
Board used	Renesas Starter Kit+ for RX65N-2MB (product No.: RTK50565N2SxxxxxBE) RX65N Envision Kit (product No.: RTK5RX65N2CxxxxxBR)

## **RX Family Board Support Package Module Using Firmware Integration Technology**

**Table 9.10 Confirmed Operation Environment (Rev.3.80)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 7.0.0
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V2.08.00 Compiler option: The following option is added to the default settings of the integrated development environment. <ul style="list-style-type: none"><li>● -lang = C99</li></ul>
Endian	Big endian/little endian
Revision of the module	Rev3.80
Board used	Renesas Starter Kit for RX111 (product No.: R0K505111SxxxBE) Renesas Starter Kit for RX113 (product No.: R0K505113SxxxBE) Renesas Starter Kit for RX130 (product No.: RTK5005130SxxxxxBE) Renesas Starter Kit for RX130-512KB (product No.: RTK5051308SxxxxxBE) Renesas Starter Kit for RX210 (B Mask) (product No.: R0K505210SxxxBE) Renesas Starter Kit for RX231 (product No.: R0K505231SxxxBE) Renesas Starter Kit for RX23T (product No.: RTK500523TSxxxxxBE) Renesas Starter Kit for RX63T (64-pin) (product No.: R0K50563TSxxxBE) Renesas Starter Kit for RX63T (144-pin) (product No.: R0K5563THSxxxBE) Renesas Starter Kit+ for RX64M (product No.: R0K50564MSxxxBE) Renesas Starter Kit+ for RX65N (product No.: RTK500565NSxxxxxBE) Renesas Starter Kit+ for RX65N-2MB (product No.: RTK50565N2SxxxxxBE) Renesas Starter Kit+ for RX71M (product No.: R0K50571MSxxxBE) Target Board for RX130 (product No.: RTK5RX1300CxxxxxBR) Target Board for RX231 (product No.: RTK5RX2310CxxxxxBR) Target Board for RX65N (product No.: RTK5RX65N0CxxxxxBR) RX65N Envision Kit (product No.: RTK5RX65N2CxxxxxBR)

**Table 9.11 Confirmed Operation Environment (Rev.3.90)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 7.0.0
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V3.00.00 Compiler option: The following option is added to the default settings of the integrated development environment. <ul style="list-style-type: none"><li>● -lang = C99</li></ul>
Endian	Big endian/little endian
Revision of the module	Rev3.90
Board used	Renesas Starter Kit for RX66T (product No.: RTK50566T0SxxxxxBE)

## **RX Family Board Support Package Module Using Firmware Integration Technology**

**Table 9.12 Confirmed Operation Environment (Rev.3.91)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 7.0.0
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V3.00.00 Compiler option: The following option is added to the default settings of the integrated development environment. <ul style="list-style-type: none"><li>● -lang = C99</li></ul>
Endian	Big endian/little endian
Revision of the module	Rev3.91
Board used	Renesas Starter Kit for RX66T (product No.: RTK50566T0SxxxxxBE)

**Table 9.13 Confirmed Operation Environment (Rev.4.00)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 7.1.0
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V3.00.00 Compiler option: The following option is added to the default settings of the integrated development environment. <ul style="list-style-type: none"><li>● -lang = C99</li></ul>
Endian	Big endian/little endian
Revision of the module	Rev4.00

**Table 9.14 Confirmed Operation Environment (Rev.4.01)**

Item	Details
Integrated development environment	Renesas Electronics e <sup>2</sup> studio Version 7.2.0
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V3.00.00 Compiler option: The following option is added to the default settings of the integrated development environment. <ul style="list-style-type: none"><li>● -lang = C99</li></ul>
Endian	Big endian/little endian
Revision of the module	Rev4.01
Board used	Renesas Starter Kit for RX72T (product No.: RTK5572Txxxxxxxxxx)



### 9.2 Troubleshooting

---

(1) Q: I have added the FIT module to the project and built it. Then I got the error: Could not open source file "platform.h".

A: The FIT module may not be added to the project properly. Check if the method for adding FIT modules is correct with the following documents:

- When using CS+:  
Application note "Adding Firmware Integration Technology Modules to CS+ Projects (R01AN1826)"
- When using e<sup>2</sup> studio:

Application note "Adding Firmware Integration Technology Modules to Projects (R01AN1723)"

When using a FIT module, the board support package FIT module (BSP module) must also be added to the project. For this, refer to the application note "Board Support Package Module Using Firmware Integration Technology (R01AN1685)".

(2) Q: I have added the FIT module to the project and built it. Then I got an error: ERROR - Valid clock source must be chosen in r\_bsp\_config.h using BSP\_CFG\_CLOCK\_SOURCE macro.

A: The setting in the file "r\_bsp\_config.h" may be wrong. Check the file "r\_bsp\_config.h". If there is a wrong setting, set the correct value for that. Refer to 3 Configuration.

## Technical Update Information

The following technical update applies to this module.

- TN-RX\*-A021A
- TN-RX\*-A138A
- TN-RX\*-A164A
- TN-RX\*-A169A

## Website and Support

Renesas Electronics Website

<http://www.renesas.com/>

Inquiries

<http://www.renesas.com/contact/>

All trademarks and registered trademarks are the property of their respective owners.

# Revision Record

Rev.	Date	Description	
		Page	Summary
2.30	Nov.15.13	—	First Release.
2.40	Feb.18.14	—	Added support for RX21A, RX220, RX110. Expanded 'MCU Information' subsection.
2.50	Mar.13.14	—	Added support for RX64M.
2.60	Jul.15.14	—	Added section for Creating a BSP Module for a Custom Board.
2.70	Aug.5.14	—	Added support for RX113.
2.80	Jan.21.15	—	Added support for RX71M.
2.81	Mar.31.15	—	Supported 240 MHz of the operating frequency (default) for RX71M.
2.90	Jun.30.15	—	Added support for RX231.
3.00	Sep.30.15	—	Added support for RX23T.
3.01	Sep.30.15	Program	Modified the BSP FIT module due to the software issues.

## Modification Regarding Clocks

### [Description]

For processing to switch a clock immediately after a reset, there is an error in determination of the condition in processing for switching to high-speed operating mode when exceeding allowable frequency range of middle-speed operating mode. This may cause middle-speed operating mode to be set with a frequency out of the allowable frequency range.

### [Conditions]

When the following three conditions are all met:

- RX231 or RX23T is used with the BSP FIT module rev. 3.00 or earlier.
- The initial definition of the highest clock frequency is as follows:  $12\text{ MHz} < \text{the highest clock frequency} \leq 32\text{ MHz}$  (RX231).
- The initial definition of the ICLK is as follows:  $12\text{ MHz} < \text{ICLK} \leq 32\text{ MHz}$  (RX23T).

### [Workaround]

Use rev. 3.01 or a later version of the BSP FIT module.

## Modification Regarding Stacks

### [Description]

The large stack size defined by the BSP FIT module may cause a lack of the RAM area used for other than stack or heap.

### [Conditions]

When the following two conditions are met:

- RX23T is used with the BSP FIT module rev. 3.00.
- `BSP_CFG_USER_STACK_ENABLE = 1`

### [Workaround]

Use rev. 3.01 or a later version of the BSP FIT module.

---

Rev.	Date	Description	
		Page	Summary
3.01	Sep.30.15	Program	Modified the BSP FIT module due to the software issues.
			<u>Modification Regarding Locks</u>
			[Description] For the lock function, predefined indexes according to hardware functions do not exactly correspond to actual hardware functions supported. Thus the lock function may not be used for some hardware functions.
			[Conditions] When the following three conditions are all met: - RX231 or RX23T is used with the BSP FIT module rev. 3.00 or earlier. - The function R_BSP_HardwareLock or R_BSP_HardwareUnlock is used. - BSP_CFG_USER_LOCKING_ENABLED = 0
			[Workaround] Use rev. 3.01 or a later version of the BSP FIT module.
			This modification includes the following changes in definitions. - Definitions added (RX23T) BSP_LOCK_CMPC0, CMPC1, CMPC2, BSP_LOCK_SMC11, SMC15 - Definitions added (RX231) BSP_LOCK_CMPB0, CMPB1, CMPB2, CMPB3, BSP_LOCK_LPT - Definitions deleted (RX231) BSP_LOCK_CMPB, BSP_LOCK_SMC12, SMC13, SMC14, SMC17, SMC110, SMC111
3.10	Dec.1.15	—	Added support for RX130.
		1, 6, 8	Modified descriptions in the following sections: Target Device, 2.6 Clock Setup, 2.14 Trusted Memory
		62	Added the following section: Technical Update Information
3.20	Feb.1.16	—	Added support for RX24T.
		13, 14	Added the following macro definitions in section 3.2.6 Clock Setup: - BSP_CFG_MAIN_CLOCK_SOURCE - BSP_CFG_MOSC_WAIT_TIME - BSP_CFG_ROM_CACHE_ENABLE
		Program	Modified the PCLKA to satisfy the clock restriction (ICLK=PCLKA) of Ethernet Controller (ETHERC). (RX63N)

Rev.	Date	Description	
		Page	Summary
3.30	Feb.29.16	—	Added support for RX230.
		—	Update RX113 iodef.h to V1.0A.
		43	5.15 R_BSP_SoftwareDelay, Description changed
		Program	Modified the BSP FIT module.
			<u>Modification Regarding API Functions</u>
			[Description] Since subtraction of overhead in the R_BSP_SoftwareDelay function is more than necessary, it may not be able to secure the specified duration.
			[Workaround] Change the following definition (the overhead cycles). - OVERHEAD_CYCLES - OVERHEAD_CYCLES_64
			[Note] This modification is compared with the BSP FIT module Rev.3.20 or earlier, the processing time of R_BSP_SoftwareDelay function is longer.
3.31	May.19.16	—	Updated RX230 and RX231 iodef.h to V1.0F.
		—	Changed RX23T iodef.h to V1.1.
		—	Changed RX24T iodef.h to V1.0A.
		—	Changed RX64M iodef.h to V1.0.
		14	3.2.6 Clock Setup Amended the following macro definition: <ul style="list-style-type: none"> <li>• BSP_CFG_MOSC_WAIT_TIME</li> </ul> Added the following macro definitions: <ul style="list-style-type: none"> <li>• BSP_CFG_HOCO_WAIT_TIME</li> <li>• BSP_CFG_SOSC_WAIT_TIME</li> </ul>
		Program	<u>Modification Regarding Memory</u> Changed the setting values in the following macro definition to match the increased RAM capacity (RX23T): <ul style="list-style-type: none"> <li>• BSP_RAM_SIZE_BYTES</li> </ul>

Rev.	Date	Description	
		Page	Summary
3.31	May.19.16	Program	<p><u>Modification Regarding Clocks</u> The following items are now supported. Made partial changes to the program code (RX23T, RX64M, and RX71M).</p> <p>[Description]</p> <ul style="list-style-type: none"> <li>Added HOCO as a selectable clock source for the system clock (RX23T only).</li> <li>The oscillation source of the main clock oscillator is selectable.</li> <li>The wait time of the main clock oscillator is selectable.</li> </ul> <p>The oscillation source of the sub-clock oscillator is selectable (RX64M and RX71M only).</p> <p>[Note]</p> <p>With these changes, the wait time default values for the main clock oscillator and sub-clock oscillator of the RX64M and RX71M are set to the values after a reset listed in the user's manual. Note that the new default values differ from the BSP FIT module default values listed in rev. 3.30 and earlier.</p> <p><u>Modification Regarding Clocks</u> Amended the HOCO oscillation setting because the setting value was not appropriate when HOCO oscillation is enabled in option function select register 1 (OFS1.HOCOEN = 1) (RX64M and RX71M).</p> <p>[Description]</p> <ul style="list-style-type: none"> <li>Made changes so that when HOCO oscillation is enabled in option function select register 1 (OFS1.HOCOEN = 1) and HOCO is selected as the clock source of the system clock, HOCO oscillation does not stop.</li> <li>Set the HOCO power supply to OFF when HOCO oscillation is disabled in option function select register 1 (OFS1.HOCOEN = 0) and HOCO is not selected as the clock source of the system clock.</li> </ul> <p><u>Modification Regarding interrupts</u> Made changes to the bsp_interrupt_group_enable_disable function in the program code to conform to the IPR setting procedure in the user's manual (RX64M and RX71M).</p> <p>[Description]</p> <p>Changed the program code so that writing to the IPRr register occurs when the value of the corresponding IERm.IENj bit is 0.</p> <p><u>Modification Regarding STDIO &amp; Debug console</u> Improved the following (RX23T, RX64M, and RX71M).</p> <p>[Description]</p> <p>The module did not operate properly when BSP_CFG_USER_CHARGET_ENABLED or BSP_CFG_USER_CHARPUT_ENABLED was set to "enabled" (1), so the program code was modified to ensure proper operation.</p>

Rev.	Date	Description	
		Page	Summary
3.31	May.19.16	Program	<p><u>Modification Regarding API Functions</u>  Deleted unnecessary enumerated constants from the R_BSP_RegisterProtectEnable and R_BSP_RegisterProtectDisable functions, and added HOCO enumerated constant (RX23T).</p> <p>[Description]  Deleted the BSP_REG_PROTECT_VRCR constant of the bsp_reg_protect_t enumerated argument of the R_BSP_RegisterProtectEnable and R_BSP_RegisterProtectDisable functions.  Added BSP_REG_PROTECT_HOCOWTCR.</p>
3.40	Oct.1.16	— 17	<p>Added support for RX65N.  3.2.7 Registers in ROM &amp; External Memory Access Protection  Added the following macro definitions:</p> <ul style="list-style-type: none"> <li>• BSP_CFG_FAW_REG_VALUE</li> <li>• BSP_CFG_ROMCODE_REG_VALUE</li> </ul>
		Program	<p><u>Modification Regarding Clocks</u>  (1) Changed the default value of the following definition in <i>r_bsp_config_reference.h</i>, because it becomes the cause of compile errors in the LPT module (RX130).</p> <ul style="list-style-type: none"> <li>• BSP_CFG_LPT_CLOCK_SOURCE</li> </ul> <p>Changed the default value from 2 to 0.</p> <p>(2) Fixed the error of the following definitions in <i>mcu_info.h</i> (RX230, RX231).  Case of the "BSP_CFG_LPT_CLOCK_SOURCE = 1".</p> <ul style="list-style-type: none"> <li>• BSP_LPTSRCCLK_HZ</li> </ul> <p>Changed the default value from "15360" to "15000".  Case of the "BSP_CFG_LPT_CLOCK_SOURCE = 2".</p> <ul style="list-style-type: none"> <li>• Deleted the definition.</li> </ul> <p>(3) Added the following macro definition in <i>mcu_info.h</i> (RX130).</p> <ul style="list-style-type: none"> <li>• BSP_LPTSRCCLK_HZ</li> </ul>

Rev.	Date	Description	
		Page	Summary
3.50	Mar.15.17	—	Added support for RX24U
		—	Changed RX24T iodef.h to V1.0H.
		15	3.2.6 Clock Setup Amended the following macro definition contests:
			<ul style="list-style-type: none"> <li>• BSP_CFG_USE_CGC_MODULE</li> </ul>
		16	3.2.7 Registers in ROM & External Memory Access Protection Amended the following macro definition contests:
			<ul style="list-style-type: none"> <li>• BSP_CFG_OFS1_REG_VALUE</li> </ul>
		19	4.5 Supported Toolchains Amended the contents
		62	Added 8, Appendix
		Program	<u>Modification Regarding Memory</u> Changed the setting values in the following macro definition to match the increased ROM and RAM capacity (RX24T): <ul style="list-style-type: none"> <li>• BSP_ROM_SIZE_BYTES</li> <li>• BSP_RAM_SIZE_BYTES</li> </ul>
			<u>Modification Regarding Package</u> Added the following macro definition to match the increased 64 Pin Packages (RX24T): <ul style="list-style-type: none"> <li>• BSP_PACKAGE_LFQFP64</li> <li>• BSP_PACKAGE_PINS</li> </ul>
			<u>Modification Regarding Clocks</u> The following items are now supported. Made partial changes to the program code (RX24T).  [Description] <ul style="list-style-type: none"> <li>• Added HOCO as a selectable clock source for the system clock.</li> <li>• Added HOCO as a selectable input clock source for the PLL circuit.</li> </ul>
			<u>Modification Regarding STDIO &amp; Debug console</u> Improved the following (RX24T).  [Description] <p>The module did not operate properly when BSP_CFG_USER_CHARGET_ENABLED or BSP_CFG_USER_CHARPUT_ENABLED was set to “enabled” (1), so the program code was modified to ensure proper operation.</p>
			<u>Modification Regarding API Functions</u> Deleted unnecessary enumerated constants from the R_BSP_RegisterProtectEnable and R_BSP_RegisterProtectDisable functions, and added HOCO enumerated constant (RX24T).  [Description] <p>Deleted the BSP_REG_PROTECT_VRCR constant of the bsp_reg_protect_t enumerated argument of the R_BSP_RegisterProtectEnable and R_BSP_RegisterProtectDisable functions. Added BSP_REG_PROTECT_HOCOWTCR.</p>



Rev.	Date	Description	
		Page	Summary
3.60	May.15.17	—	Added support for RX130-512KB.
		—	Added support for RX65N-2MB.
		—	Added support for GENERIC-RX65N.
		—	Updated RX110 iodef.h to V1.0B.
		—	Updated RX111 iodef.h to V1.1A.
		—	Updated RX113 iodef.h to V1.0C.
		—	Updated RX130 iodef.h to V2.0.
		—	Updated RX210 iodef.h to V1.5.
		—	Updated RX21A iodef.h to V1.1C.
		—	Updated RX220 iodef.h to V1.1A.
		—	Updated RX230 iodef.h to V1.0I.
		—	Updated RX231 iodef.h to V1.0I.
		—	Updated RX23T iodef.h to V1.1C.
		—	Updated RX62N iodef.h to V1.4.
		—	Updated RX62T iodef.h to V2.0.
		—	Updated RX62G iodef.h to V2.0.
		—	Updated RX630 iodef.h to V1.6A.
		—	Updated RX63N/RX631 iodef.h to V1.8A.
		—	Updated RX63T iodef.h to V2.1C.
		—	Updated RX64M iodef.h to V1.0A.
		—	Updated RX65N iodef.h to V2.0.
		—	Updated RX71M iodef.h to V1.0A.
		—	Applied the following technical update:
		—	- TN-RX*-A138A
		—	- TN-RX*-A164A
		—	- TN-RX*-A169A
		—	Modified the description in 1.2 File Structure.
		4	Revised Figure 1-1: r_bsp File Structure.
		4	Added Figure 1-2: Structures of Evaluation Board Folder and
		5	generic Folder.
		—	Modified the description in 2.2 Initialization.
		7	Revised Figure 2-1: PowerON_Reset_PC() Flowchart.
		7	Added Figure 2-2: Flowchart of System Clock Setting
		8	Modified the descriptions in 2.14 Trusted Memory.
		11	Added 2.15 Bank Mode.
		11	Moved the section "Group Interrupts" from 4.10.7 to 2.20 and
		11	modified the description.
		—	Moved the section "Software Configurable Interrupts" from
		11	4.10.8 to 2.21.
		—	Added 2.23 Startup Disable.
		13	Modified the descriptions in 3.2.4 CPU Modes & Boot Modes
		19	including Table 3-4.
		—	Corrected and added the following definitions in 3.2.6 Clock
		20	Setup:
		—	- Addition: BSP_CFG_RTC_ENABLE
		—	- Addition: BSP_CFG_SOSC_DRV_CAP
		—	- Correction: BSP_CFG_PLL_SOURCE ->
		—	BSP_CFG_PLL_SCR

		Description	
Rev.	Date	Page	Summary
3.60	May.15.17	22-23	Modified and added the following definitions in 3.2.7 Registers in ROM & External Memory Access Protection: - Modification: BSP_CFG_OFS1_REG_VALUE - Addition: BSP_CFG_CODE_FLASH_BANK_MODE - Addition: BSP_CFG_CODE_FLASH_START_BANK
		24	Added 3.2.11 Startup Disable.
		26	Added 4.9.3 Interrupt Control Parameter.
		28	Modified 4.10.3 Interrupt Error Codes.
		28	Modified 4.10.4 Interrupt Control Commands.
		29	Added 4.10.7 Unit for Software Delay.
		29	Changed 4.12 Adding Driver to Your Project.
		30	Added 4.13 Code size.
		31	Modified 5. API Functions.
		50	Added 5.15 R_BSP_InterruptControl().
		52	Added 5.17 R_BSP_GetIClkFreqHz().
		53	Added 5.18 R_BSP_StartupOpen().
		55	Added 6.1 Creating a FIT Project.
		59	Added 6.2 Adding FIT Module with e <sup>2</sup> studio FIT Configurator.
		72	Added 8. Adding FIT Modules to the User Project.
		79	Added Table 9.7 Operation Confirmation Environment (Rev.3.60).
		79	Added 9.2 Creating a Project with FIT Plug-in.
		79	Moved the section "Creating an Empty Project" from 6.1 to 9.2.1 and modified some descriptions.
		85	Moved the section "Adding r_bsp with e <sup>2</sup> studio FIT Plug-in" from 6.2 to 9.2.2.
		88	Added 9.3 Troubleshooting.
		Program	<u>Changes associated with functions:</u>  Deleted unnecessary transition to User Mode. (RX130) - Description: Deleted the following function. PSW_PM_to_UserMode function.  Added the startup disable function. (RX65N) - Description: Added the macro definition, BSP_CFG_STARTUP_DISABLE.  Added the bank function. (RX65N) - Description: Added processing for setting the bank function in vecttbl.c. If a package with the ROM of 1 Mbytes or less is selected, this processing will be disabled.  Modified the procedure for initializing the ADSAM register. (RX65N) - Description: Modified the procedure to hold the setting of module-stop state before the ADSAM register is initialized so that the setting can be restored after the initialization.

Rev.	Date	Description	
		Page	Summary
3.60	May.15.17	Program	<p><u>Changes associated with packages:</u></p> <p>Added new package specifications. (RX130) [Description]</p> <p>(1) Added the following macro definitions for new packages.</p> <ul style="list-style-type: none"> <li>- BSP_MCU_RX130_512KB</li> <li>- BSP_PACKAGE_LFQFP100</li> </ul> <p>(2) Added setting values of the following macro definitions regarding new packages.</p> <ul style="list-style-type: none"> <li>- BSP_CFG_MCU_PART_PACKAGE: Values: FP = 0x5 = LFQFP/100/0.50</li> <li>- BSP_CFG_MCU_PART_MEMORY_SIZE: Values: 6 = 0x6 = 128KB/32KB/8KB 7 = 0x7 = 384KB/48KB/8KB 8 = 0x8 = 512KB/48KB/8KB</li> </ul> <p>Added new package specifications. (RX65N) [Description]</p> <p>(1) Added the following macro definitions for new packages.</p> <ul style="list-style-type: none"> <li>- BSP_CFG_CODE_FLASH_BANK_MODE</li> <li>- BSP_CFG_CODE_FLASH_START_BANK</li> <li>- BSP_MCU_RX65N_2MB</li> <li>- BSP_PACKAGE_LFQFP176</li> <li>- BSP_PACKAGE_LFBGA176</li> <li>- BSP_PACKAGE_TFLGA177</li> <li>- BSP_PRV_PORTG_NE_PIN_MASK</li> </ul> <p>(2) Added setting values of the following macro definitions regarding new packages.</p> <ul style="list-style-type: none"> <li>- BSP_CFG_MCU_PART_PACKAGE: Values: FC = 0x0 = LFQFP/176/0.50 BG = 0x1 = LFBGA/176/0.80 LC = 0x2 = TFLGA/177/0.50</li> <li>- BSP_CFG_MCU_PART_ENCRYPTION_INCLUDED: Values: D = false = Encryption module not included, SDHI/SDSI module included, dual-bank structure H = true = Encryption module included, SDHI/SDSI module included, dual-bank structure.</li> <li>- BSP_CFG_MCU_PART_MEMORY_SIZE: Values: C = 0xC = 1.5MB/640KB/32KB E = 0xE = 2MB/640KB/32KB</li> </ul> <p>Changed the macro definitions for the RX231 package.</p> <p>(1) Added the following macro definition.</p> <ul style="list-style-type: none"> <li>- BSP_PACKAGE_WFLGA64</li> </ul> <p>(2) Deleted the following macro definition.</p> <ul style="list-style-type: none"> <li>- BSP_PACKAGE_LQFP64</li> </ul>

Rev.	Date	Description	
		Page	Summary
3.60	May.15.17	Program	<p>(3) Added setting values of the following macro definitions:</p> <ul style="list-style-type: none"> <li>- BSP_CFG_MCU_PART_PACKAGE: Values: LF = 0x1 = WFLGA/64/0.50</li> <li>- BSP_CFG_MCU_PART_VERSION: Values: C = 0xC = Chip version C = Security function not included, SDHI module not included, CAN module not included.</li> </ul> <p>(4) Deleted the setting values for the following macro definition:</p> <ul style="list-style-type: none"> <li>- BSP_CFG_MCU_PART_PACKAGE: Values: FK = 0x3 = LQFP/64/0.80 LJ = 0xA = TFLGA/100/0.65</li> <li>- BSP_CFG_MCU_PART_MEMORY_SIZE: Values: 3 = 0x3 = 64KB/12KB/8KB</li> </ul> <p>(5) Changed the setting values for the following macro definitions:</p> <ul style="list-style-type: none"> <li>- BSP_CFG_MCU_PART_MEMORY_SIZE: Value: 5 = 0x5 = 128KB/20KB/8KB -&gt; 5 = 0x5 = 128KB/32KB/8KB</li> </ul> <p>Changed the macro definition for the RX63N/RX631 package. [Description]</p> <p>(1) Changed the default value of the following macro definition:</p> <ul style="list-style-type: none"> <li>- BSP_CFG_MCU_PART_MEMORY_SIZE: (RSK only) Value: (0xB) -&gt; (0xF)</li> <li>- BSP_CFG_MCU_PART_GROUP: (RX631 only) Value: (0x2) -&gt; (0x1)</li> </ul> <p>(2) Added the following macro definition.</p> <ul style="list-style-type: none"> <li>- BSP_PACKAGE_TFLGA64</li> </ul> <p>(3) Deleted the following macro definition.</p> <ul style="list-style-type: none"> <li>- BSP_PACKAGE_LQFP80</li> </ul> <p>(4) Added setting values of the following macro definitions:</p> <ul style="list-style-type: none"> <li>- BSP_CFG_MCU_PART_PACKAGE: Values: LJ = 0xA = TFLGA/100/0.65 LH = 0xB = TFLGA/64/0.65</li> <li>- BSP_CFG_MCU_PART_ENCRYPTION_INCLUDED: Values: H = true = CAN included/DEU included/PDC not included. G = false = CAN not included/DEU included/PDC not included. S = true = CAN included/DEU not included/PDC included. F (only 64-pin TFLGA) = true = CAN included/DEU not included/PDC not included.</li> </ul>

Rev.	Date	Description	
		Page	Summary
3.60	May.15.17	Program	<p>- BSP_CFG_MCU_PART_MEMORY_SIZE:  Values: F = 0xF = 2MB/256KB/32KB  G = 0x10 = 1.5MB/192KB/32KB  J = 0x13 = 1.5MB/256KB/32KB  K = 0x14 = 2MB/192KB/32KB  M = 0x16 = 256KB/64KB/32KB  N = 0x17 = 384KB/64KB/32KB  P = 0x19 = 512KB/64KB/32KB  W = 0x20 = 1MB/192KB/32KB  Y = 0x22 = 1MB/256KB/32KB</p> <p>(5) Deleted the setting values for the following macro definition:  - BSP_CFG_MCU_PART_PACKAGE:  Values: LA = 0x6 = TFLGA/100/0.65  FN = 0x7 = LQFP/80/0.50  - BSP_CFG_MCU_PART_CAN_INCLUDED:  Values: E = = 3V included (RX63T). Ignore.  - BSP_CFG_MCU_PART_MEMORY_SIZE:  Values: 4 = 0x4 = 32KB/8KB/8KB  5 = 0x5 = 48KB/8KB/8KB</p> <p>(6) Changed the setting values for the following macro definitions:  - BSP_CFG_MCU_PART_MEMORY_SIZE:  Value: 6 = 0x6 = 64KB/8KB/8KB  -&gt; 6 = 0x6 = 256KB/128KB/32KB  Value: 7 = 0x7 = 384KB/64KB/32KB  -&gt; 7 = 0x7 = 384KB/128KB/32KB  Value: 8 = 0x8 = 512KB/64KB/32KB  -&gt; 8 = 0x8 = 512KB/128KB/32KB</p> <p>Changed the macro definitions for the RX64M package.  [Description]  (1) Corrected typo for the following macro definitions:  - BSP_PACKAGE_LQFP176 -&gt;  BSP_PACKAGE_LFQFP176  - BSP_PACKAGE_LQFP144 -&gt;  BSP_PACKAGE_LFQFP144  - BSP_PACKAGE_LQFP100 -&gt;  BSP_PACKAGE_LFQFP100</p> <p>(2) Added the setting value for the following macro definition:  - BSP_CFG_MCU_PART_PACKAGE:  Value: LJ = 0xA = TFLGA/100/0.65</p> <p>(3) Deleted the setting values for the following macro definition:  - BSP_CFG_MCU_PART_PACKAGE:  Values: LA = 0x6 = TFLGA/100/0.50  JA = 0x7 = TFLGA/100/0.65</p>

Rev.	Date	Description	
		Page	Summary
3.60	May.15.17	Program	<p>Changed the macro definition for the RX65N package.</p> <p>[Description]</p> <p>(1) Corrected typo for the following macro definitions:</p> <ul style="list-style-type: none"> <li>- BSP_PACKAGE_LQFP144 -&gt; BSP_PACKAGE_LFQFP144</li> <li>- BSP_PACKAGE_LQFP100 -&gt; BSP_PACKAGE_LFQFP100</li> </ul> <p>(2) Changed the setting values for the following macro definitions:</p> <ul style="list-style-type: none"> <li>- BSP_CFG_MCU_PART_PACKAGE: Value: LJ = 0x6 = TFLGA/100/0.65 -&gt; LJ = 0xA = TFLGA/100/0.65</li> <li>- BSP_CFG_MCU_PART_GROUP: Value: 5N = 0x0 = RX65N Group -&gt; 5N/51 = 0x0 = RX65N Group/RX651 Group</li> </ul> <p>(3) Deleted the setting value for the following macro definition:</p> <ul style="list-style-type: none"> <li>- BSP_CFG_MCU_PART_GROUP: Value: 51 = 0x1 = RX65N Group</li> </ul> <p>Changed the macro definition for the RX71M package.</p> <p>[Description]</p> <p>(1) Corrected typo for the following macro definitions:</p> <ul style="list-style-type: none"> <li>- BSP_PACKAGE_LQFP176 -&gt; BSP_PACKAGE_LFQFP176</li> <li>- BSP_PACKAGE_LQFP144 -&gt; BSP_PACKAGE_LFQFP144</li> <li>- BSP_PACKAGE_LQFP100 -&gt; BSP_PACKAGE_LFQFP100</li> </ul> <p>(2) Changed the setting value for the following macro definition:</p> <ul style="list-style-type: none"> <li>- BSP_CFG_MCU_PART_PACKAGE: Value: LJ = 0x6 = TFLGA/100/0.65 -&gt; LJ = 0xA = TFLGA/100/0.65</li> </ul> <p><u>Changes associated with clocks:</u></p> <p>The following items are now supported. Made partial changes to the program code. (RX130)</p> <p>[Description]</p> <p>(1) Added definition of the following clock setting:</p> <ul style="list-style-type: none"> <li>- The oscillation source of the main clock oscillator is selectable.</li> <li>- The wait time of the main clock oscillator is selectable.</li> </ul> <p>(2) Added the following macro definition in mcu_info.h.</p> <ul style="list-style-type: none"> <li>- BSP_ILOCO_HZ</li> </ul>

Rev.	Date	Description	
		Page	Summary
3.60	May.15.17	Program	<p>Made add to the <code>lpt_clock_source_select</code> function in the program code to conform to the notes on LPT in the user's manual. (RX130)</p> <p>[Description] When the IWDT-dedicated on-chip oscillator is used as the clock source for the low-power timer, changed the program code so that writing to the IWDTCSTPR.SLCSTP bit to 0.</p> <p>Improved the following. (RX130)</p> <p>[Description] (1) When restarting the sub-clock oscillator after it has been stopped, allow at least five cycles of the sub-clock as an interval over which it is still stopped.</p> <p>Deleted the following unnecessary branch condition in the <code>lpt_clock_source_select</code> function. - <code>BSP_CFG_LPT_CLOCK_SOURCE == 2</code></p> <p>Modified the sub-clock oscillation settings. (RX64M, RX65N, RX71M)</p> <p>[Description] (1) Modified for the sub-clock oscillation settings to be specified according to the settings in <code>r_bsp_config.h</code>.</p> <p>(2) Added processing at warm start.</p> <p>(3) Added the following macro definitions regarding changes in the sub-clock oscillation settings. - <code>BSP_CFG_RTC_ENABLE</code> - <code>BSP_CFG_SOSC_DRV_CAP</code></p> <p><u>Changes associated with interrupts:</u></p> <p><u>Made add to the <code>bsp_interrupt_enable_disable</code> function in the program code. (RX130)</u></p> <p>[Description] <u>Added timeout detection enable bit (<code>BSC.BEREN.BIT.TOEN</code>) settings.</u></p>

Rev.	Date	Description	
		Page	Summary
3.60	May.15.17	Program	<p>Modified the following items for software configurable interrupts.</p> <p>[Description]</p> <p>(1) Corrected the macro definitions due to typos in names of the software configurable interrupt sources. (RX64M, RX65N, RX71M)</p> <p>The corrected interrupt sources are as follows:</p> <ul style="list-style-type: none"> <li>- TPU0_TGI0V -&gt; TPU0_TCI0V</li> <li>- TPU1_TGI1V -&gt; TPU1_TCI1V</li> <li>- TPU1_TGI1U -&gt; TPU1_TCI1U</li> <li>- TPU2_TGI2V -&gt; TPU2_TCI2V</li> <li>- TPU2_TGI2U -&gt; TPU2_TCI2U</li> <li>- TPU3_TGI3V -&gt; TPU3_TCI3V</li> <li>- TPU4_TGI4V -&gt; TPU4_TCI4V</li> <li>- TPU4_TGI4U -&gt; TPU4_TCI4U</li> <li>- TPU5_TGI5V -&gt; TPU5_TCI5V</li> <li>- TPU5_TGI5U -&gt; TPU5_TCI5U</li> <li>- MTU0_TGIV0 -&gt; MTU0_TCIV0</li> <li>- MTU1_TGIV1 -&gt; MTU1_TCIV1</li> <li>- MTU1_TGIU1 -&gt; MTU1_TCIU1</li> <li>- MTU2_TGIV2 -&gt; MTU2_TCIV2</li> <li>- MTU2_TGIU2 -&gt; MTU2_TCIU2</li> <li>- MTU3_TGIV3 -&gt; MTU3_TCIV3</li> <li>- MTU4_TGIV4 -&gt; MTU4_TCIV4</li> <li>- MTU6_TGIV6 -&gt; MTU6_TCIV6</li> <li>- MTU7_TGIV7 -&gt; MTU7_TCIV7</li> <li>- MTU8_TGIV8 -&gt; MTU8_TCIV8</li> </ul> <p>(2) Deleted the macro definition, MTU8_TGI8U since the corresponding interrupt source does not exist. (RX64M, RX71M)</p> <p>(3) Added interrupt sources for software configurable interrupts regarding new packages. (RX65N)</p> <ul style="list-style-type: none"> <li>- BSP_MAPPED_INT_CFG_B_VECT_TSIP_PROC_BUSY</li> <li>- BSP_MAPPED_INT_CFG_B_VECT_TSIP_ROMOK</li> <li>- BSP_MAPPED_INT_CFG_B_VECT_TSIP_LONG_PLG</li> <li>- BSP_MAPPED_INT_CFG_B_VECT_TSIP_TEST_BUSY</li> <li>- BSP_MAPPED_INT_CFG_B_VECT_TSIP_WRRDY0</li> <li>- BSP_MAPPED_INT_CFG_B_VECT_TSIP_WRRDY1</li> <li>- BSP_MAPPED_INT_CFG_B_VECT_TSIP_WRRDY4</li> <li>- BSP_MAPPED_INT_CFG_B_VECT_TSIP_RDRDY0</li> <li>- BSP_MAPPED_INT_CFG_B_VECT_TSIP_RDRDY1</li> <li>- BSP_MAPPED_INT_CFG_B_VECT_TSIP_INTEGRATE_WRRDY</li> <li>- BSP_MAPPED_INT_CFG_B_VECT_TSIP_INTEGRATE_RDRDY</li> </ul>



Rev.	Date	Description	
		Page	Summary
3.60	May.15.17	Program	<p>Modified the following items for group interrupts.</p> <p>[Description]</p> <p>(1) Modified the sequence to call callback functions for group interrupts. (RX64M, RX65N, RX71M) Peripherals influenced by the sequence change are as follows:</p> <ul style="list-style-type: none"> <li>- SC10 to SC17, SC112</li> <li>- SC18 to SC111 (RX65N only)</li> <li>- PDC</li> <li>- SCIFA8 to SCIFA11 (RX64M and RX71M only)</li> <li>- RSPI0</li> <li>- RSPI1 (RX71M and RX65N only)</li> <li>- RSPI2 (RX65N only)</li> </ul> <p>(2) Added the following enum definitions regarding new packages. (RX65N)</p> <p>bsp_int_src_t</p> <ul style="list-style-type: none"> <li>- BSP_INT_SRC_BL1_RIIC1_TEI1</li> <li>- BSP_INT_SRC_BL1_RIIC1_EEI1</li> <li>- BSP_INT_SRC_AL1_GLCDC_VPOS</li> <li>- BSP_INT_SRC_AL1_GLCDC_GR1UF</li> <li>- BSP_INT_SRC_AL1_GLCDC_GR2UF</li> <li>- BSP_INT_SRC_AL1_DRW2D_DRW_IRQ</li> </ul> <p>(3) Corrected the macro definitions due to typos in names of the group interrupt sources. (RX64M, RX71M) The corrected interrupt sources are as follows:</p> <ul style="list-style-type: none"> <li>- BSP_INT_SRC_BL0_CAC_FERRF -&gt; BSP_INT_SRC_BL0_CAC_FERRI</li> <li>- BSP_INT_SRC_BL0_CAC_MENDF -&gt; BSP_INT_SRC_BL0_CAC_MENDI</li> <li>- BSP_INT_SRC_BL0_CAC_OVFF -&gt; BSP_INT_SRC_BL0_CAC_OVFI</li> <li>- BSP_INT_SRC_BL0_DOC_DOPCF -&gt; BSP_INT_SRC_BL0_DOC_DOPCI</li> </ul> <p>Changed the following items regarding non-maskable interrupts.</p> <p>[Description]</p> <p>(1) Added the enum definition, BSP_INT_SRC_EXRAM to bsp_int_src_t regarding new packages. (RX65N)</p> <p>(2) Added interrupt processing for EXRAM in vecttbl.c regarding new packages. (RX65N) If a package with the ROM of 1 Mbytes or less is selected, this processing will be disabled.</p>

		Description	
Rev.	Date	Page	Summary
3.60	May.15.17	Program	<p><u>Change associated with API functions:</u></p> <p>Modified the branch condition for the number of loop cycles of the R_BSP_SoftwareDelay function.</p> <p>[Description]</p> <p>Before:</p> <pre> #if defined(BSP_MCU_RX231)    defined(BSP_MCU_RX64M)        defined(BSP_MCU_RX71M)    ...     #define CPU_CYCLES_PER_LOOP 4 #else     #define CPU_CYCLES_PER_LOOP 5 #endif </pre> <p>After:</p> <pre> #ifdef __RXV1     #define CPU_CYCLES_PER_LOOP (5) #else     #define CPU_CYCLES_PER_LOOP (4) #endif </pre> <p><u>Change associated with the lock function:</u></p> <p>Modified the lock function. (RX130)</p> <p>[Description]</p> <p>Added the following enums regarding new packages:</p> <pre> mcu_lock_t - BSP_LOCK_REMC0 - BSP_LOCK_REMC1 - BSP_LOCK_REMCOM - BSP_LOCK_SCI0 - BSP_LOCK_SCI8 - BSP_LOCK_SCI9 - BSP_LOCK_SMCI0 - BSP_LOCK_SMCI8 - BSP_LOCK_SMCI9 - BSP_LOCK_TEMPS </pre> <p>Modified the lock function. (RX65N)</p> <p>[Description]</p> <p>Added the following enums regarding new packages:</p> <pre> mcu_lock_t - BSP_LOCK_RIIC1 - BSP_LOCK_GLCDC - BSP_LOCK_DRW2D </pre>

---

Rev.	Date	Description	
		Page	Summary
3.60	May.15.17	Program	<p><u>Modification Regarding STDIO &amp; Debug console</u></p> <p>Improved the following. (RX130) [Description] The module did not operate properly when BSP_CFG_USER_CHARGET_ENABLED or BSP_CFG_USER_CHARPUT_ENABLED was set to “enabled” (1), so the program code was modified to ensure proper operation.</p> <p><u>Modification Regarding Pin Function</u></p> <p>Made changes to the output_ports_configure function in the program code to conform to the notes on MPC in the user’s manual. (RX130) [Description] When setting the given bits of the PMR register to 0, the PDR register to 0, and the PCR register to 0, changed the program code so that writing to the PmnPFS.ASEL bit to 1.</p> <p>Improved the following. (RX111) [Description] (1) PORTH does not exist. Therefore, deleted the port setting.</p> <p>(2) Deleted the following macro definition. - BSP_PRV_PORTH_NE_PIN_MASK</p>
3.70	Nov.1.17	— — — — — — — — — — — — — — — 20	<p>Added support for GENERIC-RX110. Added support for GENERIC-RX111. Added support for GENERIC-RX113. Added support for GENERIC-RX130. Added support for GENERIC-RX230. Added support for GENERIC-RX231. Added support for GENERIC-RX23T. Added support for GENERIC-RX24T. Added support for GENERIC-RX24U. Added support for GENERIC-RX64M. Added support for GENERIC-RX71M. Added support for Envision Kit for RX65N-2MB</p> <p>3.2.6 Clock Setup For BSP_CFG_LPT_CLOCK_SOURCE, “2 = LPT not used” has been added as the setting value in the Value and “The default value is 2 (LPT not used)” has been added to the description in the Meaning.</p>

Rev.	Date	Description	
		Page	Summary
3.70	Nov.1.17	Program	<p><u>Changes associated with functions:</u></p> <p>Added the startup disable function for RX110, RX111, RX113, RX130, RX230, RX231, RX23T, RX24T, RX24U, RX64M, and RX71M.</p> <p>[Description] Added the macro definition, BSP_CFG_STARTUP_DISABLE.</p> <p><u>Changes associated with the low power timer:</u></p> <p>Modified the following items for RX230 and RX231:</p> <p>[Description]</p> <p>(1) To follow the description for the ILCSTP bit in the User's Manual, processing to wait the ILOCO oscillation stabilization time has been added in the usb_lpc_clock_source_select function.</p> <p>(2) To follow the note on the LPT in the User's Manual, the code has been modified to write 0 to the IWDTCSLTPR.SLCSTP bit when the IWDT-dedicated on-chip oscillator is used as the clock source of the low power timer.</p> <p>(3) The usb_lpc_clock_source_select function included processing to stop the ILOCO. This processing has been removed since the ILOCO cannot be stopped by the program once it starts oscillation.</p> <p>(4) Added the definition of the IWDT-dedicated on-chip oscillator "BSP_ILOCO_HZ" for RX230 and RX231.</p> <p>Modified the following items for RX130, RX230, and RX231:</p> <p>[Description]</p> <p>(1) Added the following definition for when the LPT module is not used: "BSP_CFG_LPT_CLOCK_SOURCE = 2"</p> <p>(2) Changed the default value of the following definition: BSP_CFG_LPT_CLOCK_SOURCE (0) → (2)</p> <p>(3) Added a branch to processing not to oscillate the sub-clock and the ILOCO when the LPT is not used.</p>
3.71	Dec.20.17	24 80 108  Program	<p>3.2.10 Extended Bus Master Priority Setting</p> <p>Corrected typo for the 'Board used' in the Table 9.8 Operation Confirmation Environment.</p> <p>Corrected typo in Revision Record. (Rev3.70)</p> <p><u>Changes associated with functions:</u></p> <p>Added the Extended Bus Master Priority Setting function for RX65N-2MB.</p> <p>[Description] Added the following macro definition:</p> <ul style="list-style-type: none"> <li>- BSP_CFG_EBMAPCR_1ST_PRIORITY</li> <li>- BSP_CFG_EBMAPCR_2ND_PRIORITY</li> <li>- BSP_CFG_EBMAPCR_3RD_PRIORITY</li> <li>- BSP_CFG_EBMAPCR_4TH_PRIORITY</li> <li>- BSP_CFG_EBMAPCR_5TH_PRIORITY</li> </ul>

Rev.	Date	Description	
		Page	Summary
3.80	Jul.1.18	—	Added support for Target Board for RX130
		—	Added support for Target Board for RX231
		—	Added support for Target Board for RX65N
		—	Added support for the 384 KB and 256 KB ROM size for RX111.
		—	Changed the name of Section 9.
		—	Updated RX113 iodef.h to V1.1.
		—	Updated RX65N iodef.h to V2.0A.
		24, 25	Corrected some table names.
		25	Added 3.2.13 Using Smart Configurator.
		32	Corrected typo for Function name for "5.1 Summary" table. R_BSP_SutartupOpen -> R_BSP_StartupOpen
		81	Added Table 9.10 Confirmed Operation Environment (Rev.3.80).
		Program	Changes associated with functions: Added support setting function of configuration option Using GUI on Smart Configurator for only Generic of RX110, RX111, RX113, RX230, RX231, RX64M, RX65N, and RX71M. [Description] Added a setting file to support configuration option setting function by GUI.
			Supports peripheral function initialization processing by smart configurator. [Description] Added the following macro definition: -BSP_CFG_CONFIGURATOR_SELECT
			Processing was added after writing the ROMWT register of RX65N. Processing was added after writing the MEMWAIT register of RX71M. [Description] Added processing to check that the value written to the ROMWT or MEMWAIT register was reflected after the value was written to the ROMWT or MEMWAIT register.
			Supported tool news number R20TS0302. (RX113, RX210 and RX63T) [Description] Corrected a problem that caused a build error when selecting and building a specific package. For more information on this problem please reference the tool news (R20TS0302).
			Deleted unnecessary processing. (RX230, RX231 and RX23T) [Description] Deleted the processing for user boot function from RX230, RX231 and RX23T.
3.90	Jul.27.18	—	Added support for RX66T.
		1	Related Documents: Added the following document: "RX Family Adding Firmware Integration Technology Modules to Projects (R01AN1723)" "RX Family Adding Firmware Integration Technology Modules to CS+ Projects (R01AN1826)" "Renesas e <sup>2</sup> studio Smart Configurator User Guide (R20AN0451)"

Rev.	Date	Description	
		Page	Summary
3.90	Jul.27.18	19	3.2.3 STDIO & Debug Console Changed the chapter headings. Added descriptions regarding definitions. - Addition: BSP_CFG_USER_CHARGET_ENABLED - Addition: BSP_CFG_USER_CHARGET_FUNCTION - Addition: BSP_CFG_USER_CHARPUT_ENABLED - Addition: BSP_CFG_USER_CHARPUT_FUNCTION
		22	3.2.6. Clock Setup Deleted BSP_CFG_ROM_CACHE_ENABLE because it was moved to 3.2.15 ROM Cache Function.
		27	3.2.11. MCU Voltage Added descriptions and definitions. - Addition: BSP_CFG_MCU_AVCC_MV
		28, 29	Added 3.2.14 Negative Voltage Input Settings for AD Pins.
		30, 31	Added 3.2.15 ROM Cache Function.
		32	Added 3.2.16 Callback function at warm start Added 3.2.17 Board Revision.
		33	Added 3.2.18 Interrupt Priority Level When FIT Module Interrupts Are Disabled.
		40	4.14 “for”, “while” and “do while” statements: added.
		41	5.1 Summary Added R_BSP_VoltageLevelSetting function.
		47	5.7 R_BSP_RegisterProtectEnable() Changed contents of “Description” section.
		49	5.8 R_BSP_RegisterProtectDisable() Changed contents of “Description” section.
		64, 65	Added 5.19 R_BSP_VoltageLevelSetting()
		66	6. Project Setup 6.1 Adding the FIT Module to Your Project Changed chapter title and description.
		—	Deleted 6.2 Adding FIT Module with e <sup>2</sup> studio FIT Configurator
		87	9.1 Confirmed Operation Environment Added Table 9.11 Confirmed Operation Environment (Rev. 3.90).
		—	Deleted 9.2 Creating a Project with FIT Plug-in
		Program	Changes associated with functions: Changed the board folder of devices supporting Smart Configurator (RX110, RX111, RX113, RX130, RX230, RX231, RX64M, RX65N, and RX71M).  [Description] Deleted all folders other than the generic folder, since other boards can all be substituted with GENERIC_RXxxx.  Corresponds to cautionary note in Tool News (R20TS0302) regarding port initialization processing in “bsp_non_existent_port_init” function (RX113, RX210, RX231, RX610, RX62G, RX62N, RX62T, RX631, and RX63N) [Description] Revised port initialization settings. For details, see Tool News (R20TS0302).

Rev.	Date	Description	
		Page	Summary
3.90	Jul.27.18	Program	<p>Added the macro definition of ID code for RX64M, RX65N, and RX71M.</p> <p>[Description]  (1) Added the following macro definition:  - BSP_CFG_ID_CODE_LONG_1  - BSP_CFG_ID_CODE_LONG_2  - BSP_CFG_ID_CODE_LONG_3  - BSP_CFG_ID_CODE_LONG_4  (2) Added settings related to macro definitions to the settings file for the GUI-based configuration option setting functionality.  <u>Changes associated with packages:</u></p> <p>Changed the macro definitions for the RX23T package.  [Description]  (1) Deleted the following macro definition.  - BSP_CFG_MCU_PART_VERSION</p> <p>Changed the macro definitions for the RX220 package.  [Description]  (1) Added setting values of the following macro definitions regarding packages.  - BSP_CFG_MCU_PART_PACKAGE:  Values: FK = 0x3 = LQFP/64/0.80</p> <p>Changed the macro definitions for the RX62T package.  [Description]  (1) Added setting values of the following macro definitions regarding packages.  - BSP_CFG_MCU_PART_PACKAGE:  Values: FK = 0x4 = LQFP/64/0.80  <u>Changes associated with the lock function:</u></p> <p>Modified the lock function. (RX113)  [Description]  (1) Added the following enums.  mcu_lock_t  - BSP_LOCK_TEMPS</p> <p>Modified the lock function. (RX65N)  [Description]  (1) Added the following enums.  mcu_lock_t  - BSP_LOCK_SMCI10  - BSP_LOCK_SMCI11  <u>Modification Regarding Pin Function:</u>  Changed the program in the output_ports_configure function, since the timing of the pin settings differs depending on the peripheral function FIT module specifications. (RX210, RX220, RX23T, RX24T, RX24U, RX62G, RX62N, RX630, RX63N, and RX631)</p> <p>[Description]  Deleted the pin setting processing related to peripheral functions other than those for LEDs and switches.</p>

Rev.	Date	Description	
		Page	Summary
3.91	Aug.31.18	Program	<p>Changes associated with functions:  Modified the following item for RX66T.  (1) Corrected execution timing for bsp_volsr_initial_configure function.  (2) Added the process for saving and restoring general-purpose registers to the stack in the R_BSP_VoltageLevelSetting function.</p>
4.00	Oct.31.18	—	Added support for RX651 with 64 pin package.
		—	Updated RX65N iodef.h to V2.2.
		20	<p>3.2.5 RTOS  Added BSP_CFG_RTOS_SYSTEM_TIMER in Table 3-5 RTOS Defines.</p>
		87,88	<p>9.1 Confirmed Operation Environment  Corrected board used in Table 9.10 Confirmed Operation Environment (Rev. 3.90) and Table 9.11 Confirmed Operation Environment (Rev. 3.91).</p>
		88	<p>9.1 Confirmed Operation Environment  Added Table 9.13 Confirmed Operation Environment (Rev. 4.00).</p>
		Program	<p>Changes associated with functions:  Added settings related to macro definitions to the settings file for the GUI-based configuration option setting functionality for only Generic of RX23T, RX24T, and RX24U.  [Description]  Added a setting file to support configuration option setting function by GUI.</p> <p>Changed the board folder of devices supporting Smart Configurator (RX23T, RX24T, and RX24U).</p> <p>[Description]  Deleted all folders other than the generic folder, since other boards can all be substituted with GENERIC_RXxxx.</p> <p>Added support for RTOS of RX64M, RX65N and RX71M.  [Description]  Added RTOS processing  Added the following macro definition:  - BSP_CFG_RTOS_SYSTEM_TIMER</p> <p>Changes associated with packages:    Changed the macro definitions for the RX65N package.  [Description]  (1) Added setting values of the following macro definitions regarding packages.  - BSP_CFG_MCU_PART_PACKAGE:  Values: FM = 0x8 = LFQFP/64/0.50  Values: BP = 0xC = TFBGA/64/0.50  (2) Added the following macro definitions:  - BSP_PACKAGE_LFQFP64  - BSP_PACKAGE_TFBGA64</p>
		—	Added support for RX72T.
		41	<p>5.1 Summary  Added notes about RX72T.</p>
4.01	Jan.11.19	64	<p>5.19 R_BSP_VoltageLevelSetting  Added descriptions about RX72T.</p>



Rev.	Date	Description	
		Page	Summary
4.01	Jan.11.19	88	9.1 Confirmed Operation Environment Added Table 9.14 Confirmed Operation Environment (Rev. 4.01).

# General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

## 1. Precaution against Electrostatic Discharge (ESD)

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a humidifier should be used. This is recommended to avoid using insulators that can easily build up static electricity.

Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors must be grounded. The operator must also be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions must be taken for printed circuit boards with mounted semiconductor devices.

## 2. Processing at power-on

The state of the product is undefined at the time when power is supplied. The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the time when power is supplied. In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the time when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the time when power is supplied until the power reaches the level at which resetting is specified.

## 3. Input of signal during power-off state

Do not input signals or an I/O pull-up power supply while the device is powered off. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Follow the guideline for input signal during power-off state as described in your product documentation.

## 4. Handling of unused pins

Handle unused pins in accordance with the directions given under handling of unused pins in the manual. The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of the LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible.

## 5. Clock signals

After applying a reset, only release the reset line after the operating clock signal becomes stable. When switching the clock signal during program execution, wait until the target clock signal is stabilized. When the clock signal is generated with an external resonator or from an external oscillator during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Additionally, when switching to a clock signal produced with an external resonator or by an external oscillator while program execution is in progress, wait until the target clock signal is stable.

## 6. Voltage application waveform at input pin

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between  $V_{IL}$  (Max.) and  $V_{IH}$  (Min.) due to noise, for example, the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between  $V_{IL}$  (Max.) and  $V_{IH}$  (Min.).

## 7. Prohibition of access to reserved addresses

Access to reserved addresses is prohibited. The reserved addresses are provided for possible future expansion of functions. Do not access these addresses as the correct operation of the LSI is not guaranteed.

## 8. Differences between products

Before changing from one product to another, for example to a product with a different part number, confirm that the change will not lead to problems.

The characteristics of a microprocessing unit or microcontroller unit products in the same group but having a different part number might differ in terms of internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

## Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.  
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.  
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.  
Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.  
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.  
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



### SALES OFFICES

### Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "http://www.renesas.com/" for the latest and detailed information.

**Renesas Electronics Corporation**  
TOYOSU FORESIA, 3-2-24 Toyosu, Koto-ku, Tokyo 135-0061, Japan

**Renesas Electronics America Inc.**  
1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.  
Tel: +1-408-432-8888, Fax: +1-408-434-5351

**Renesas Electronics Canada Limited**  
9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3  
Tel: +1-905-237-2004

**Renesas Electronics Europe Limited**  
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K  
Tel: +44-1628-651-700

**Renesas Electronics Europe GmbH**  
Arcadiastrasse 10, 40472 Düsseldorf, Germany  
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

**Renesas Electronics (China) Co., Ltd.**  
Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China  
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

**Renesas Electronics (Shanghai) Co., Ltd.**  
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China  
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

**Renesas Electronics Hong Kong Limited**  
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong  
Tel: +852-2265-6688, Fax: +852 2886-9022

**Renesas Electronics Taiwan Co., Ltd.**  
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan  
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

**Renesas Electronics Singapore Pte. Ltd.**  
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949  
Tel: +65-6213-0200, Fax: +65-6213-0300

**Renesas Electronics Malaysia Sdn.Bhd.**  
Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

**Renesas Electronics India Pvt. Ltd.**  
No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India  
Tel: +91-80-67208700, Fax: +91-80-67208777

**Renesas Electronics Korea Co., Ltd.**  
17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea  
Tel: +82-2-558-3737, Fax: +82-2-558-5338