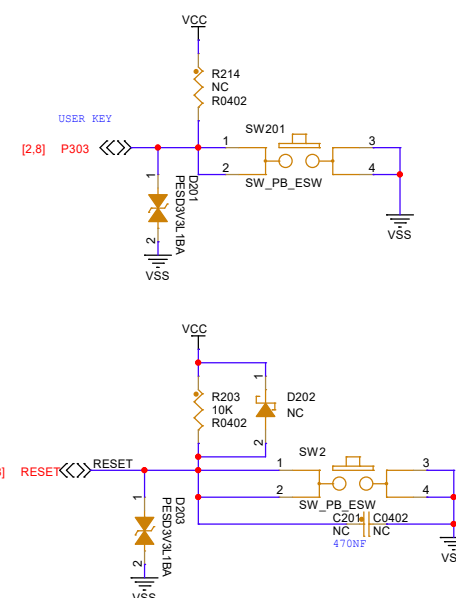


Figure 1-10 shows the pin connection diagram for the TXB0108RGYR. The diagram illustrates the internal connections of the chip, which is a 16-pin bidirectional level shifter. It connects two 3.3V systems (VCC and VSYS_3V3) and a 5V system (VCC). The chip has two sets of pins: pins 1-10 on the left and pins 11-16 on the right. The left side is connected to a 3.3V system (VCC) and the right side is connected to a 5V system (VCC). The chip is configured to translate signals between the two systems. The diagram includes labels for various pins and their functions, such as CTS, RXD2, TDO, TXD2, SWDIO, SWCLK, RTS, DBG_EN, TDI, TDO, PD04, PD05, PD03, PD08, PD09, PD02, RXD8, RXD9, TXD8, TXD9, and RESOUT. It also shows the connection of the chip to external components like resistors (R205, R206, R207, R208, R209, R210, R211, R212, R215, R216, R217) and capacitors (C202, C204). The chip is labeled 'TXB0108RGYR'.

Diagram illustrating the wiring for J201 and J202 headers:

- J201:**
 - Pin 6: VCC
 - Pin 5: P400
 - Pin 4: P401
 - Pin 3: P402
 - Pin 2: PC15
 - Pin 1: NC
- J202:**
 - Pin 6: VCC
 - Pin 5: P514
 - Pin 4: P715
 - Pin 3: P714
 - Pin 2: P515
 - Pin 1: NC

Legend for Test Points (TP):

- TP201: P210
- TP202: P211
- TP203: P212
- TP204: RESET


Note: 1.25mm间距测试点 (1.25mm pitch test points). 顺序不要打乱 (Order should not be changed).

如果使用USB HS，主晶振只能选12/20/24/48MHz

瑞萨电子www.renesas.com 东莞野火电子技术有限公司			
Title CPKCOR-RA8T2核心板			
Size A3	Document Number MCU IO	Rev V1.1	
Date:	Saturday, September 12, 2026	Sheet 2	of 10



J-Link OB

Page1: MCU 电源
Page2: MCU I/O
Page3: Jlink OB
Page4: USB HS
Page5: SDRAM
Page6: STORAGE MEMORY
Page7: 电源LDO/DCDC/MIPI/FLASH
Page8: BTB

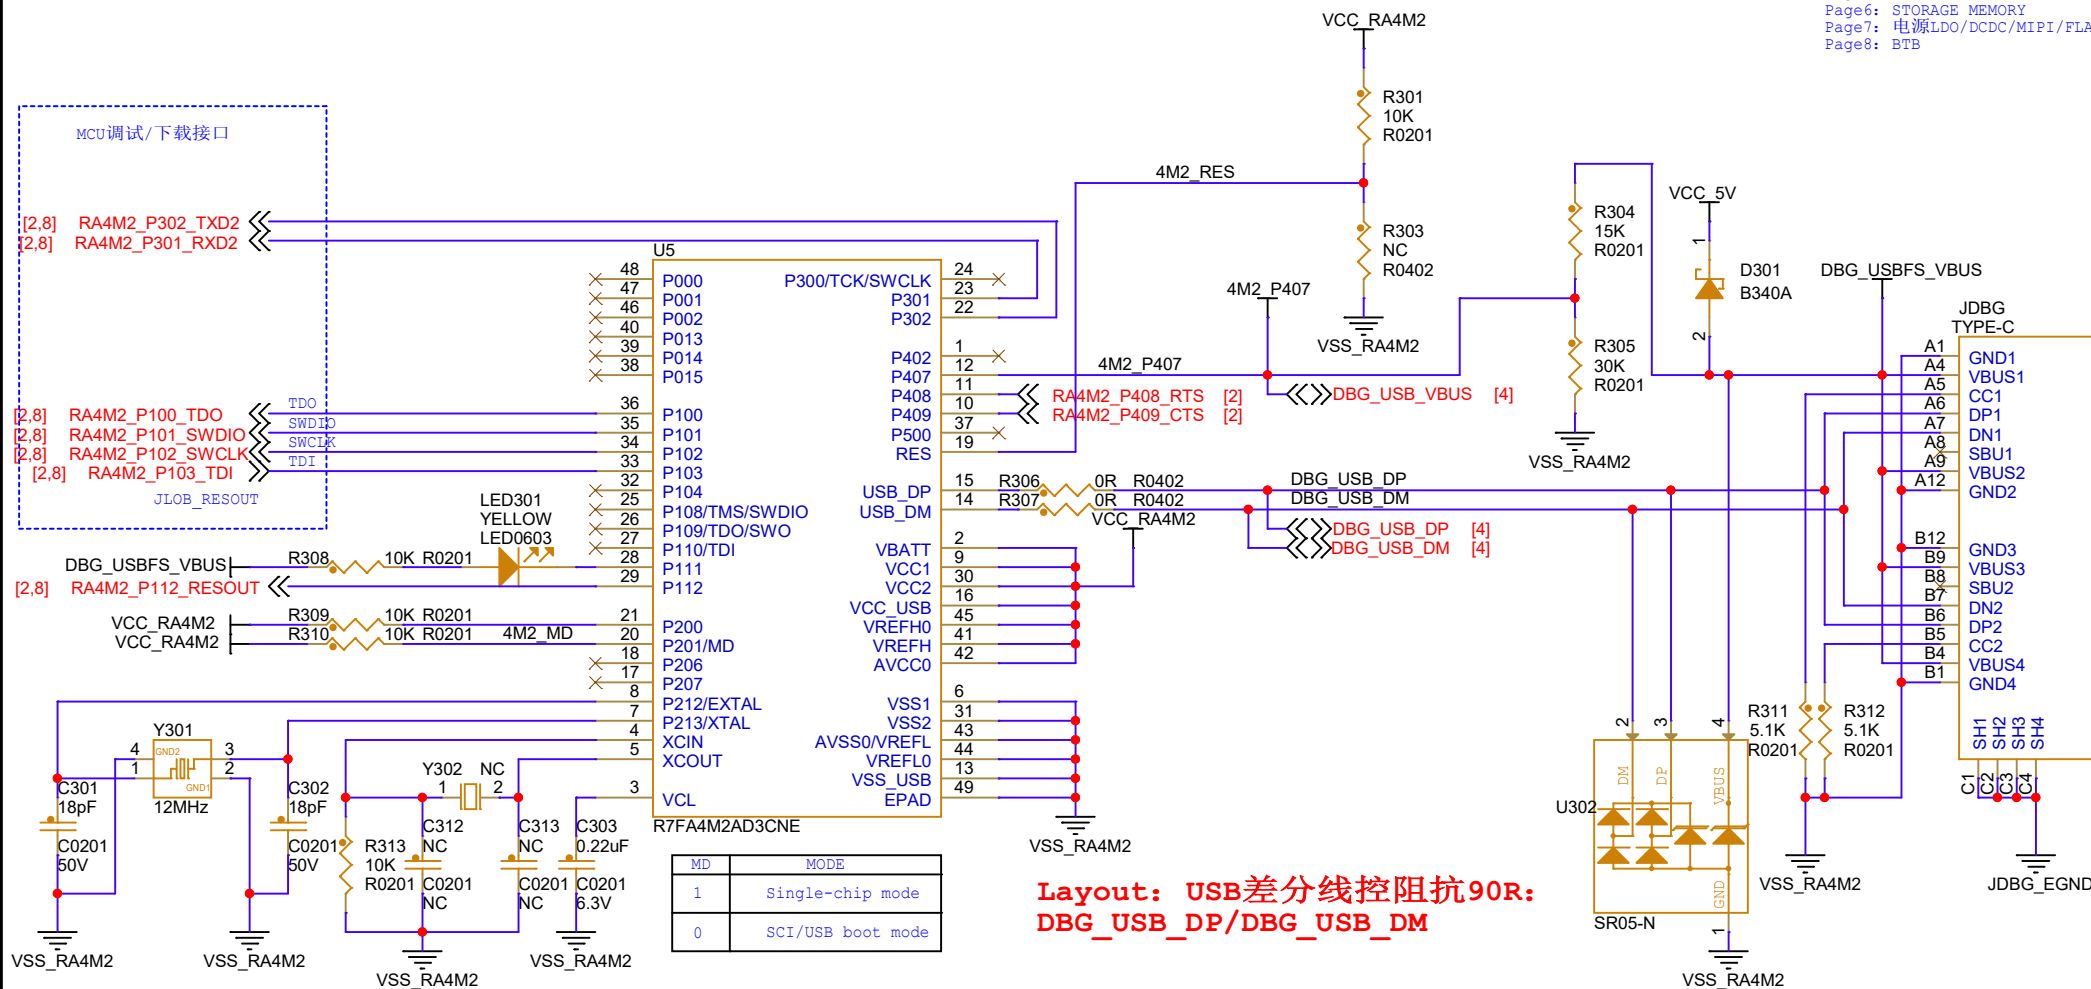

Layout: USB差分线控阻抗90R:
DBG_USB_DP/DBG_USB_DM

注意: 只能使用12MHz晶振

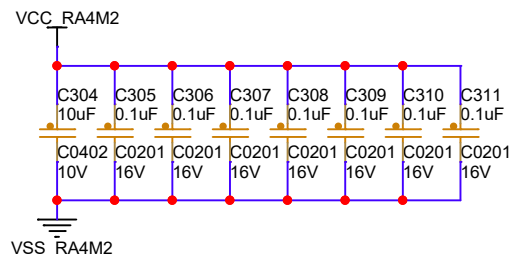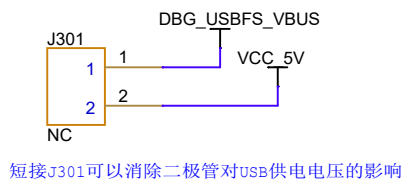


瑞萨电子www.renesas.com

Title		
CPKCOR-RA8T2核心板		
Size	Document Number	Rev
A4	Jlink OB	V1.0
Date:	Saturday, September 12, 2026	Sheet 3 of 10

USB HS



如果使用USB HS，主晶振只能选12/20/24/48MHz

Page1: MCU 电源
Page2: MCU I/O
Page3: Jlink OB
Page4: USB HS
Page5: SDRAM
Page6: STORAGE MEMORY
Page7: 电源LDO/DCDC/MIPI/FLASH
Page8: BTB
VCC 5V

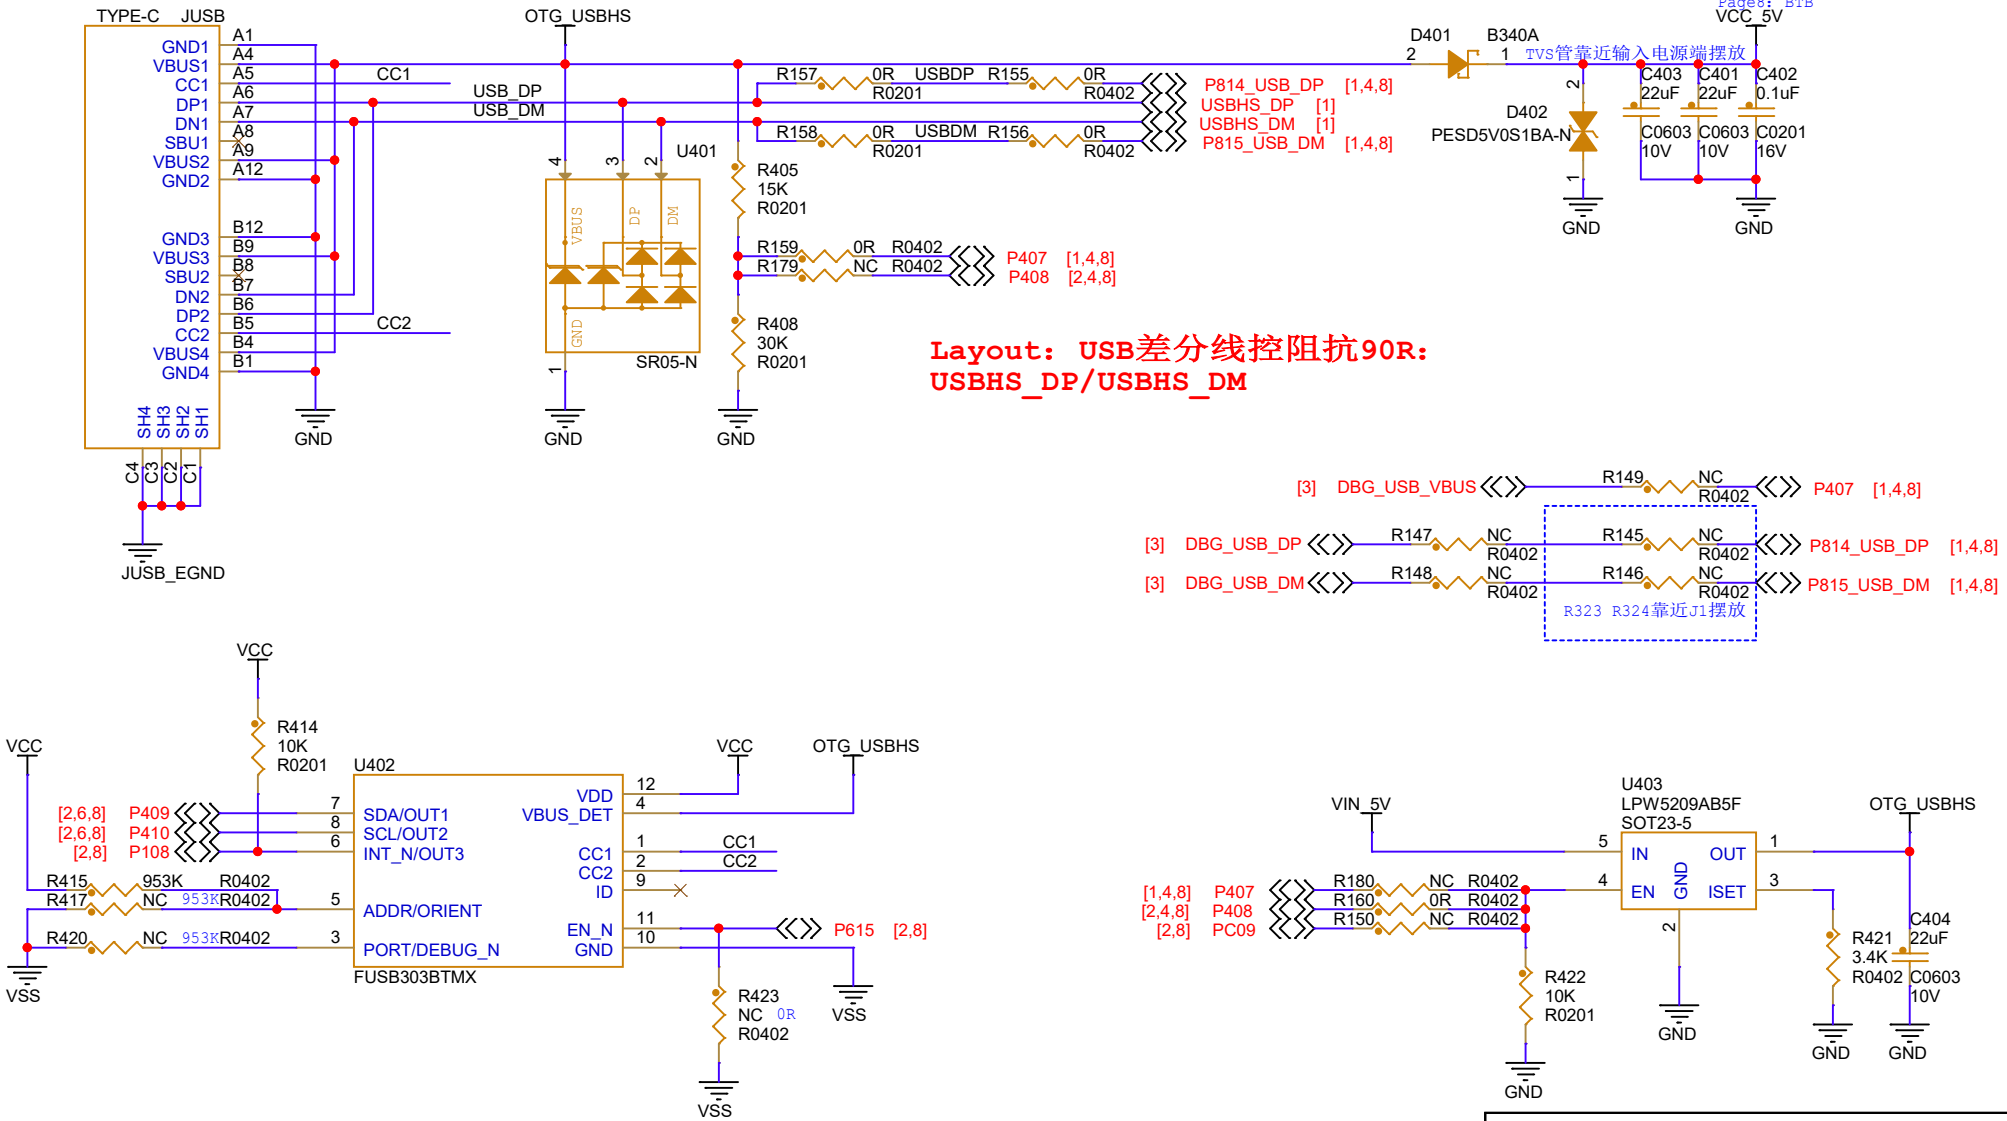



瑞萨电子www.renesas.com 东莞野火电子技术有限公司			
Title CPKCOR-RA8T2核心板			
Size A4	Document Number USB HS		Rev V1.0
Date:	Saturday, September 12, 2026		Sheet 4 of 10

FLASH

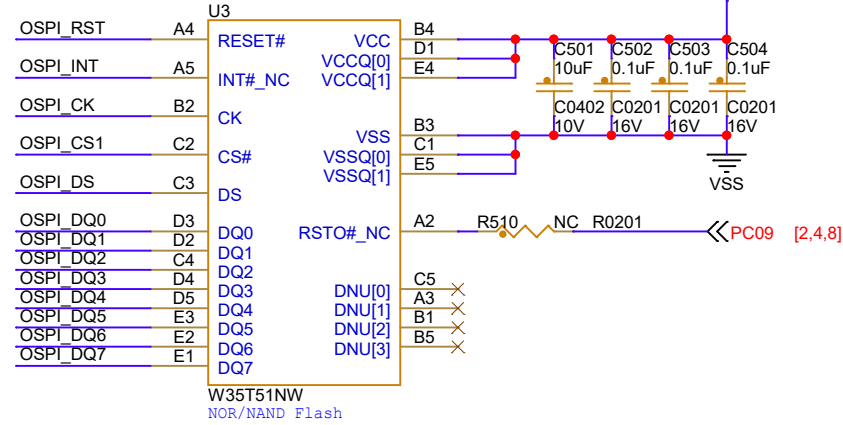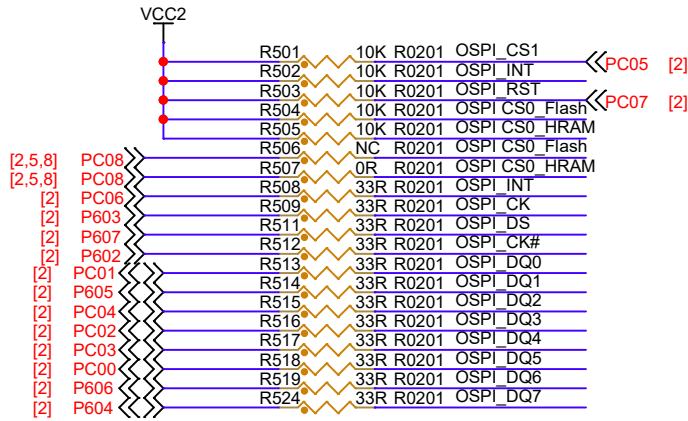

Page1: MCU 电源
Page2: MCU I/O
Page3: Jlink OB
Page4: USB HS
Page5: SDRAM
Page6: STORAGE MEMORY
Page7: 电源LDO/DCDC/MIPI/FLASH
Page8: BTB

SDRAM

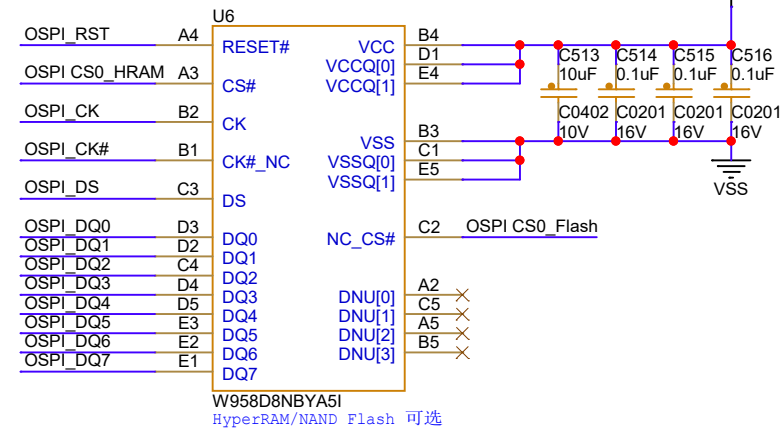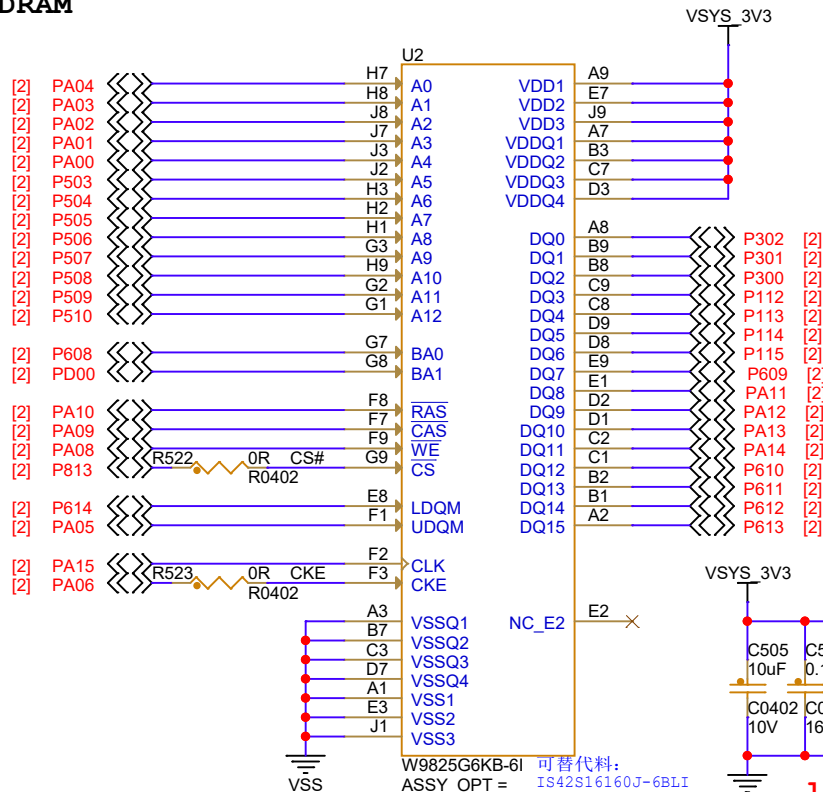


layout: SDRAM走线控阻抗50R

瑞萨电子www.renesas.com
东莞野火电子技术有限公司


Title CPKCOR-RA8T2核心板		
Size A4	Document Number SDRAM/FLASH	Rev V1.0
Date: Saturday, September 12, 2026	Sheet 5	of 10

MicroSD卡槽

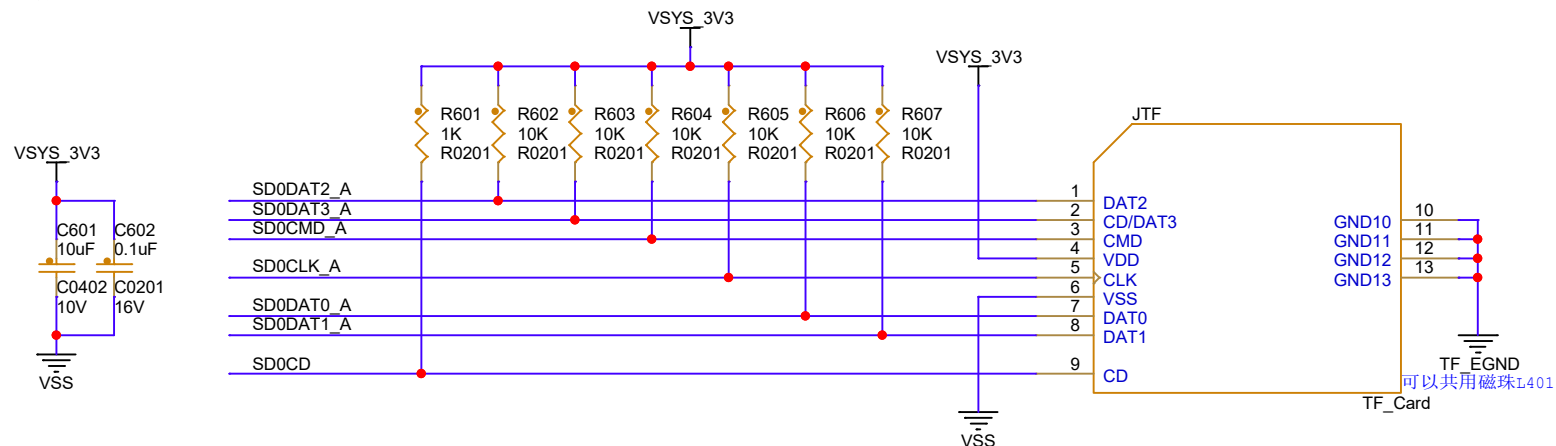


Page1: MCU 电源
 Page2: MCU I/O
 Page3: Jlink OB
 Page4: USB HS
 Page5: SDRAM
 Page6: STORAGE MEMORY
 Page7: 电源LDO/DCDC/MIPI/FLASH
 Page8: BTB


电平转换和接口保护

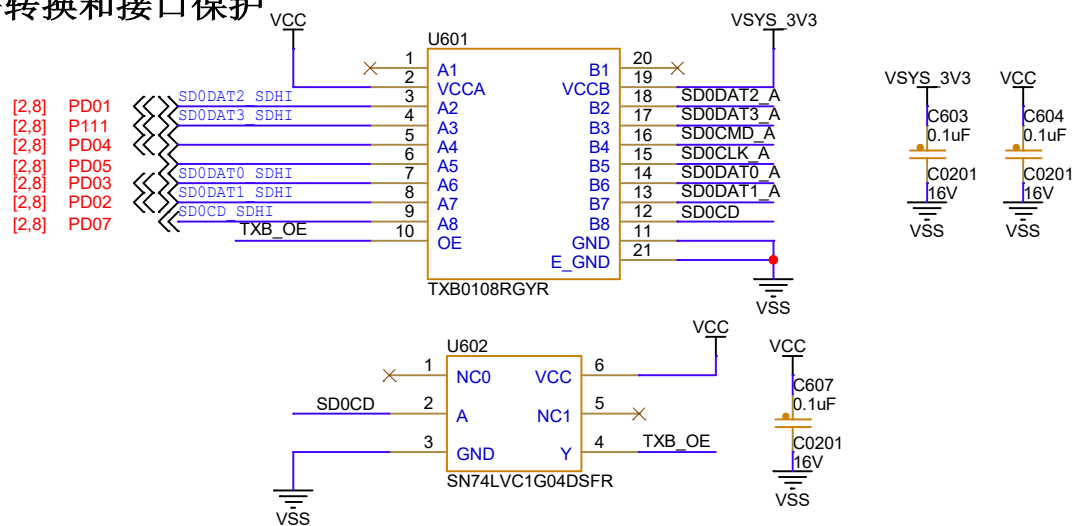

MIPI

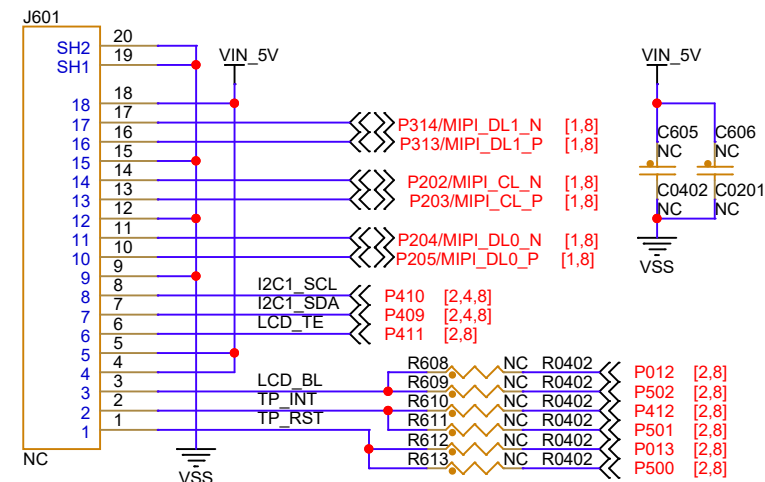

地磁传感器

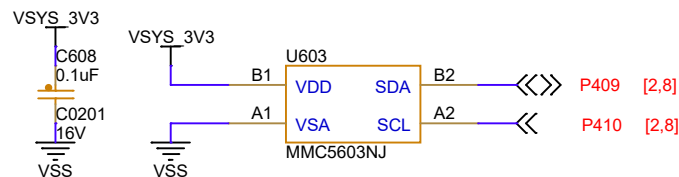

瑞萨电子 www.renesas.com
东莞野火电子技术有限公司

Title

CPKCOR-RA8T2核心板

Size
A4



Document Number	SD CARD/MIPI
-----------------	--------------

Rev	V1.0
-----	------


Date: Saturday, September 12, 2026

Sheet 6 of 10


电源分割

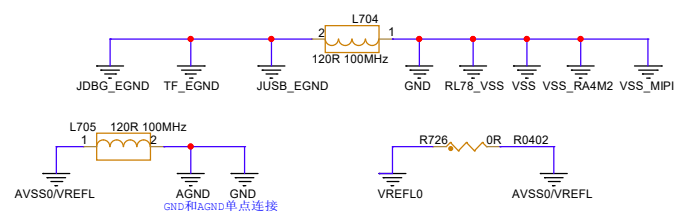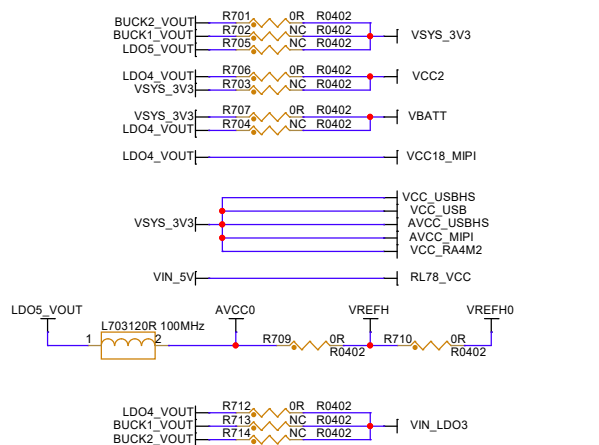


电源保护

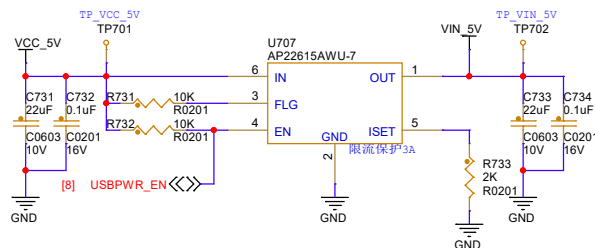


PMIC

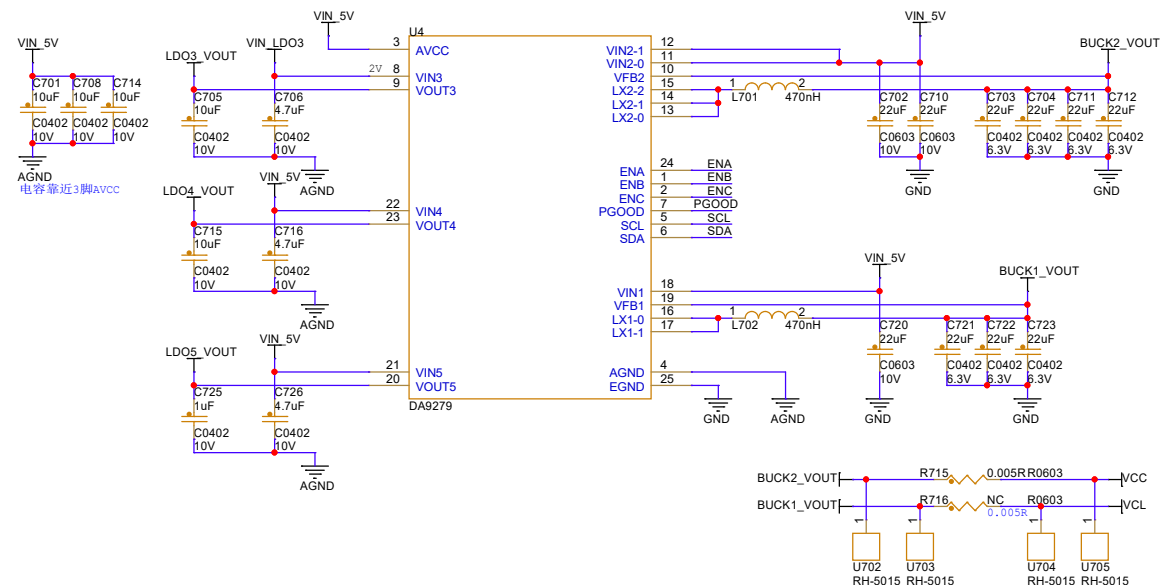

MCU

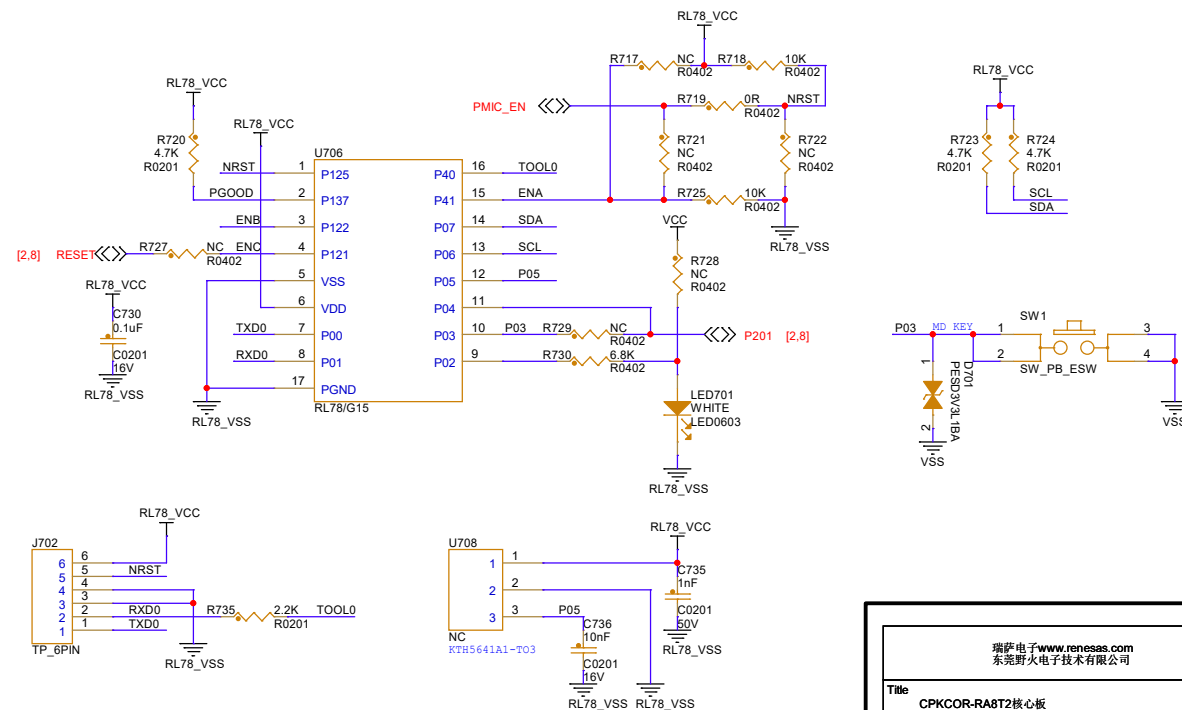

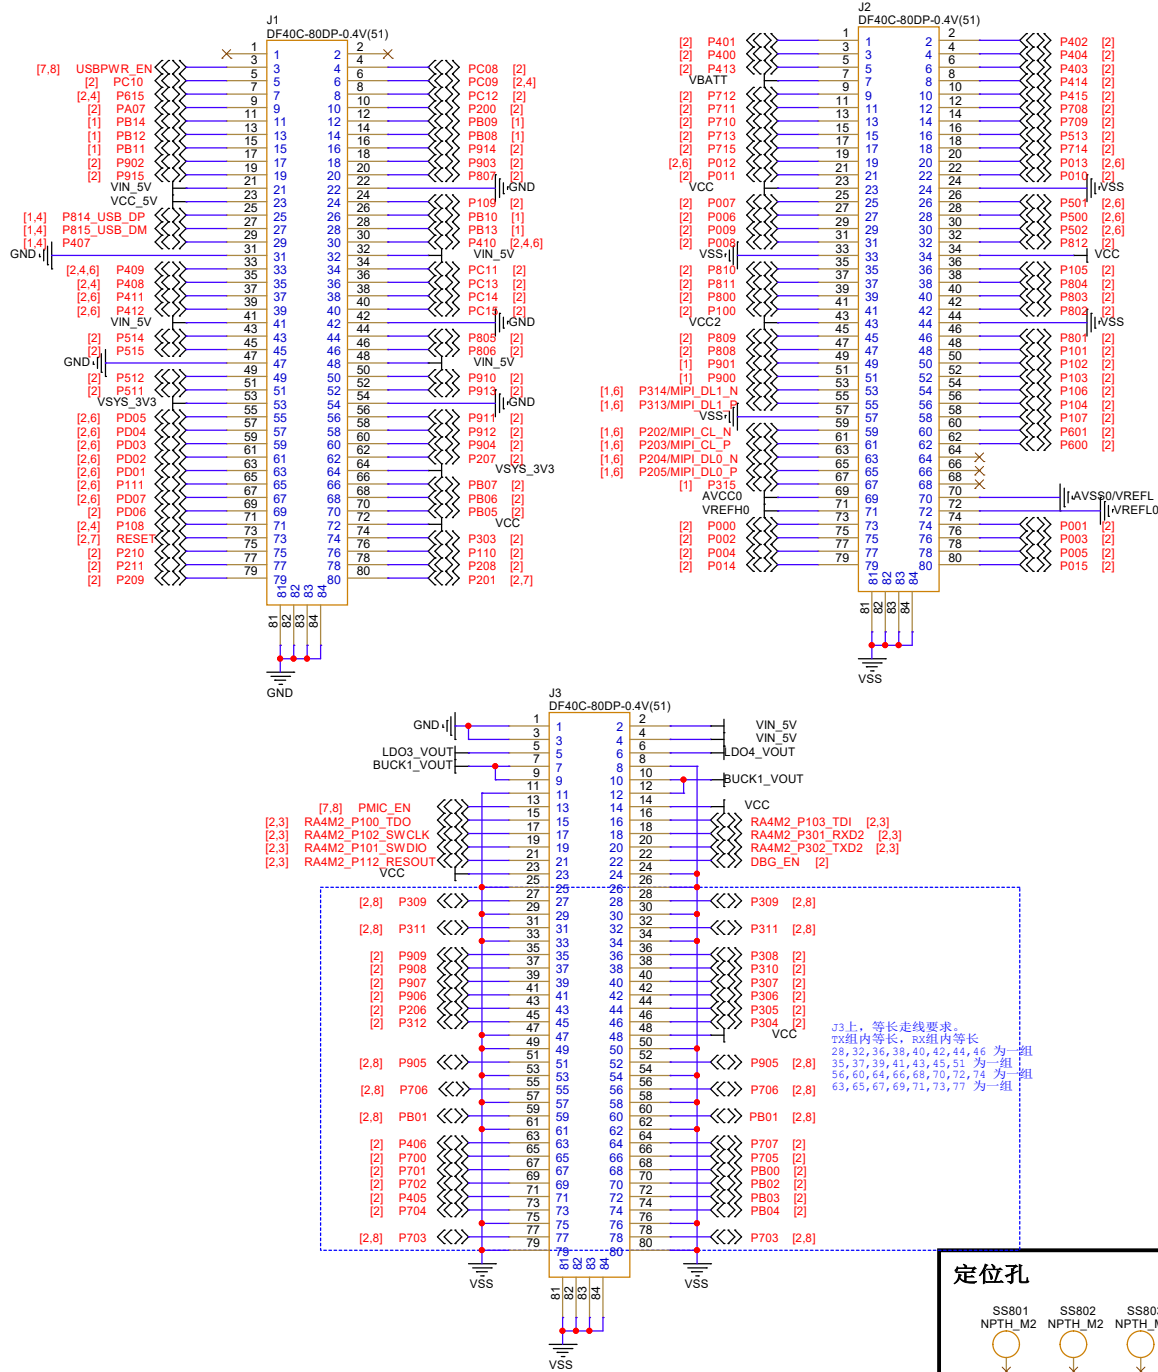

瑞萨电子www.renesas.com 东莞野火电子技术有限公司		
Title CPKCOR-RA8T2核心板		
Size A3	Document Number BTB	Rev V1.0
Date: Saturday, September 12, 2026	Sheet 8	of 10

历史版本

版本号	日期	设计	描述
V1.0	2026-06-08	LPC	初版发行


瑞萨电子www.renesas.com 东莞野火电子技术有限公司			
Title CPKCOR-RA8T2核心板			
Size A4	Document Number 历史版本		Rev V1.0
Date:	Saturday, September 12, 2026	Sheet 9	of 10

CPKCOR-RA8T2核心板_原理图_V1.0

目录

Page 1	MCU电源
Page 2	MCU I/O
Page 3	Jlink OB
Page 4	USB HS
Page 5	SDRAM/FLASH
Page 6	SD CARD/MIPI
Page 7	PMIC
Page 8	BTB
Page 9	历史版本
Page 10	目录
Page 11	
Page 12	
Page 13	
Page 14	

ART FILM - ADT

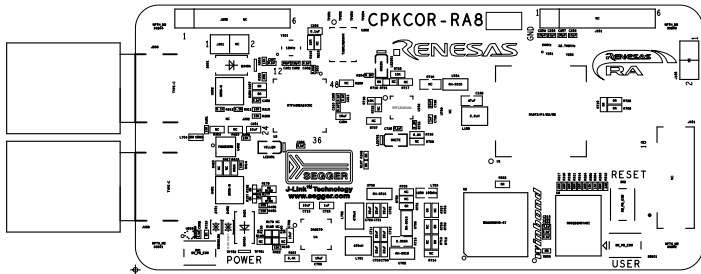

ART FILM - ADT

CPKCOR-RA8T2 Power Supply Diagram

