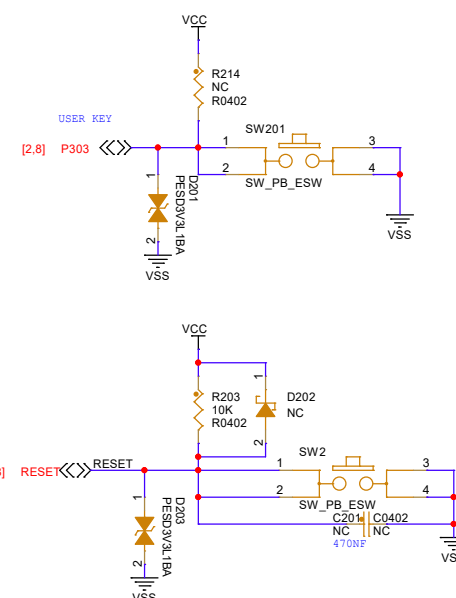


Diagram illustrating the wiring for the J201 and J202 headers:

J201:

- Pin 6: VCC
- Pin 5: P400
- Pin 4: P401
- Pin 3: P402
- Pin 2: PC15
- Pin 1: NC

J202:

- Pin 6: VCC
- Pin 5: P514
- Pin 4: P715
- Pin 3: P714
- Pin 2: P515
- Pin 1: NC

Legend:

- TP201: P210
- TP202: P211
- TP203: P212
- TP204: RESET

Note: 1.25mm间距测试点 顺序不要打乱


The schematic diagram illustrates the clock circuit for the ADXL345. It features two inverters, Y201 and Y202, configured as a ring oscillator. Inverter Y201 is a 24MHz oscillator with pins 4, 1, 3, and 2. Inverter Y202 is a 32.768KHz oscillator with pins 1 and 2. Both inverters have their inputs and outputs connected to each other. The circuit is powered by VSS and VDD (50V) and includes decoupling capacitors C204, C205, C206, and C207.

如果使用USB HS，主晶振只能选12/20/24/48MHz

瑞萨电子www.renesas.com 东莞野火电子技术有限公司			
Title CPKCOR-RA8T2核心板			
Size A3	Document Number MCU IO	Rev V1.1	
Date:	Saturday, September 12, 2026	Sheet 2	of 10



J-Link OB

Page1: MCU 电源
Page2: MCU I/O
Page3: Jlink OB
Page4: USB HS
Page5: SDRAM
Page6: STORAGE MEMORY
Page7: 电源LDO/DCDC/MIPI/FLASH
Page8: BTB

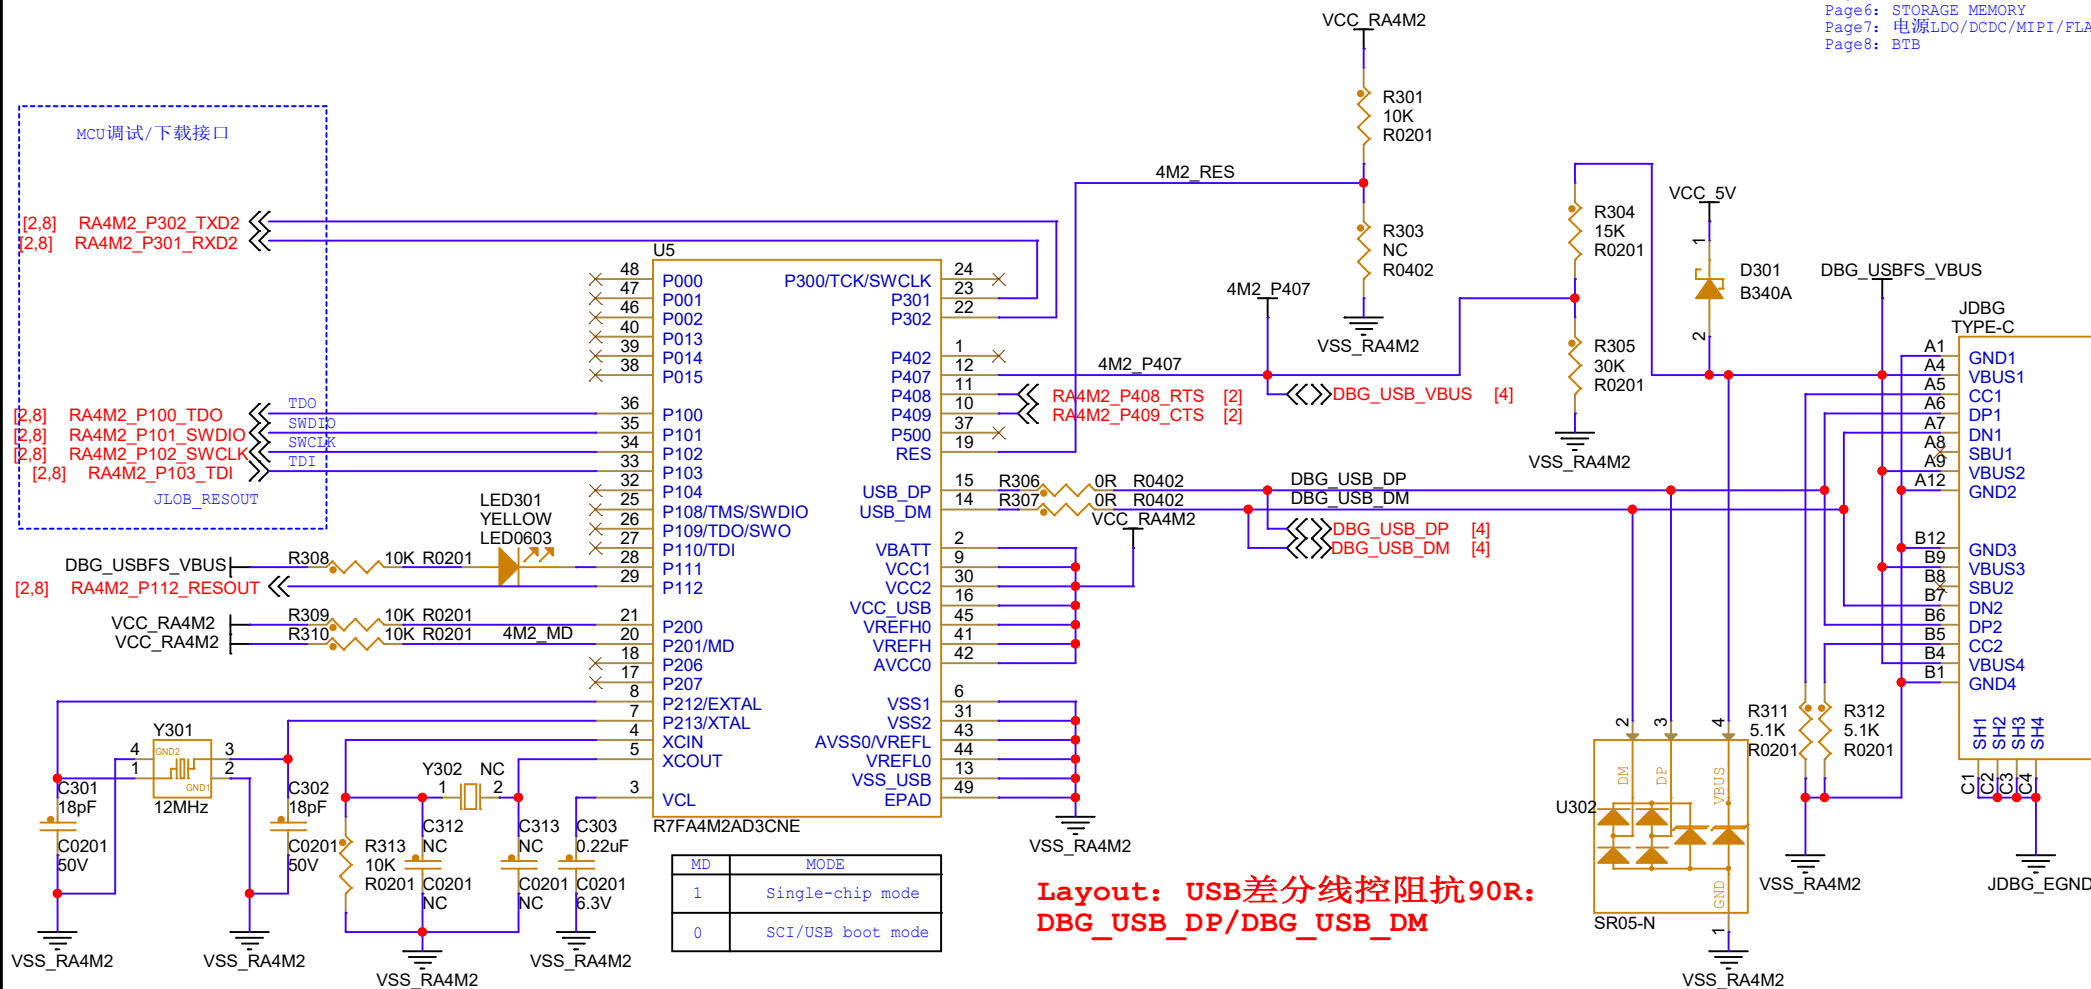

Layout: USB差分线控阻抗90R:
DBG_USB_DP/DBG_USB_DM

注意: 只能使用12MHz晶振

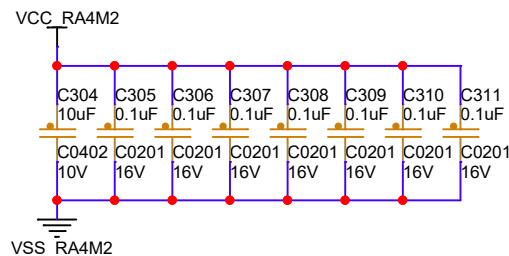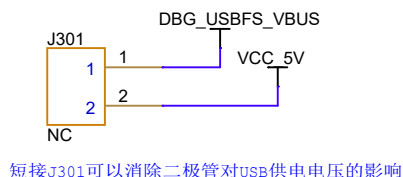


瑞萨电子www.renesas.com

Title		
CPKCOR-RA8T2核心板		
Size	Document Number	Rev
A4	Jlink OB	V1.0
Date:	Saturday, September 12, 2026	Sheet 3 of 10

USB HS

如果使用USB HS，主晶振只能选12/20/24/48MHz



Page1: MCU 电源
Page2: MCU I/O
Page3: Jlink OB
Page4: USB HS
Page5: SDRAM
Page6: STORAGE MEMORY
Page7: 电源LDO/DCDC/MIPI/FLASH
Page8: BTB
VCC 5V

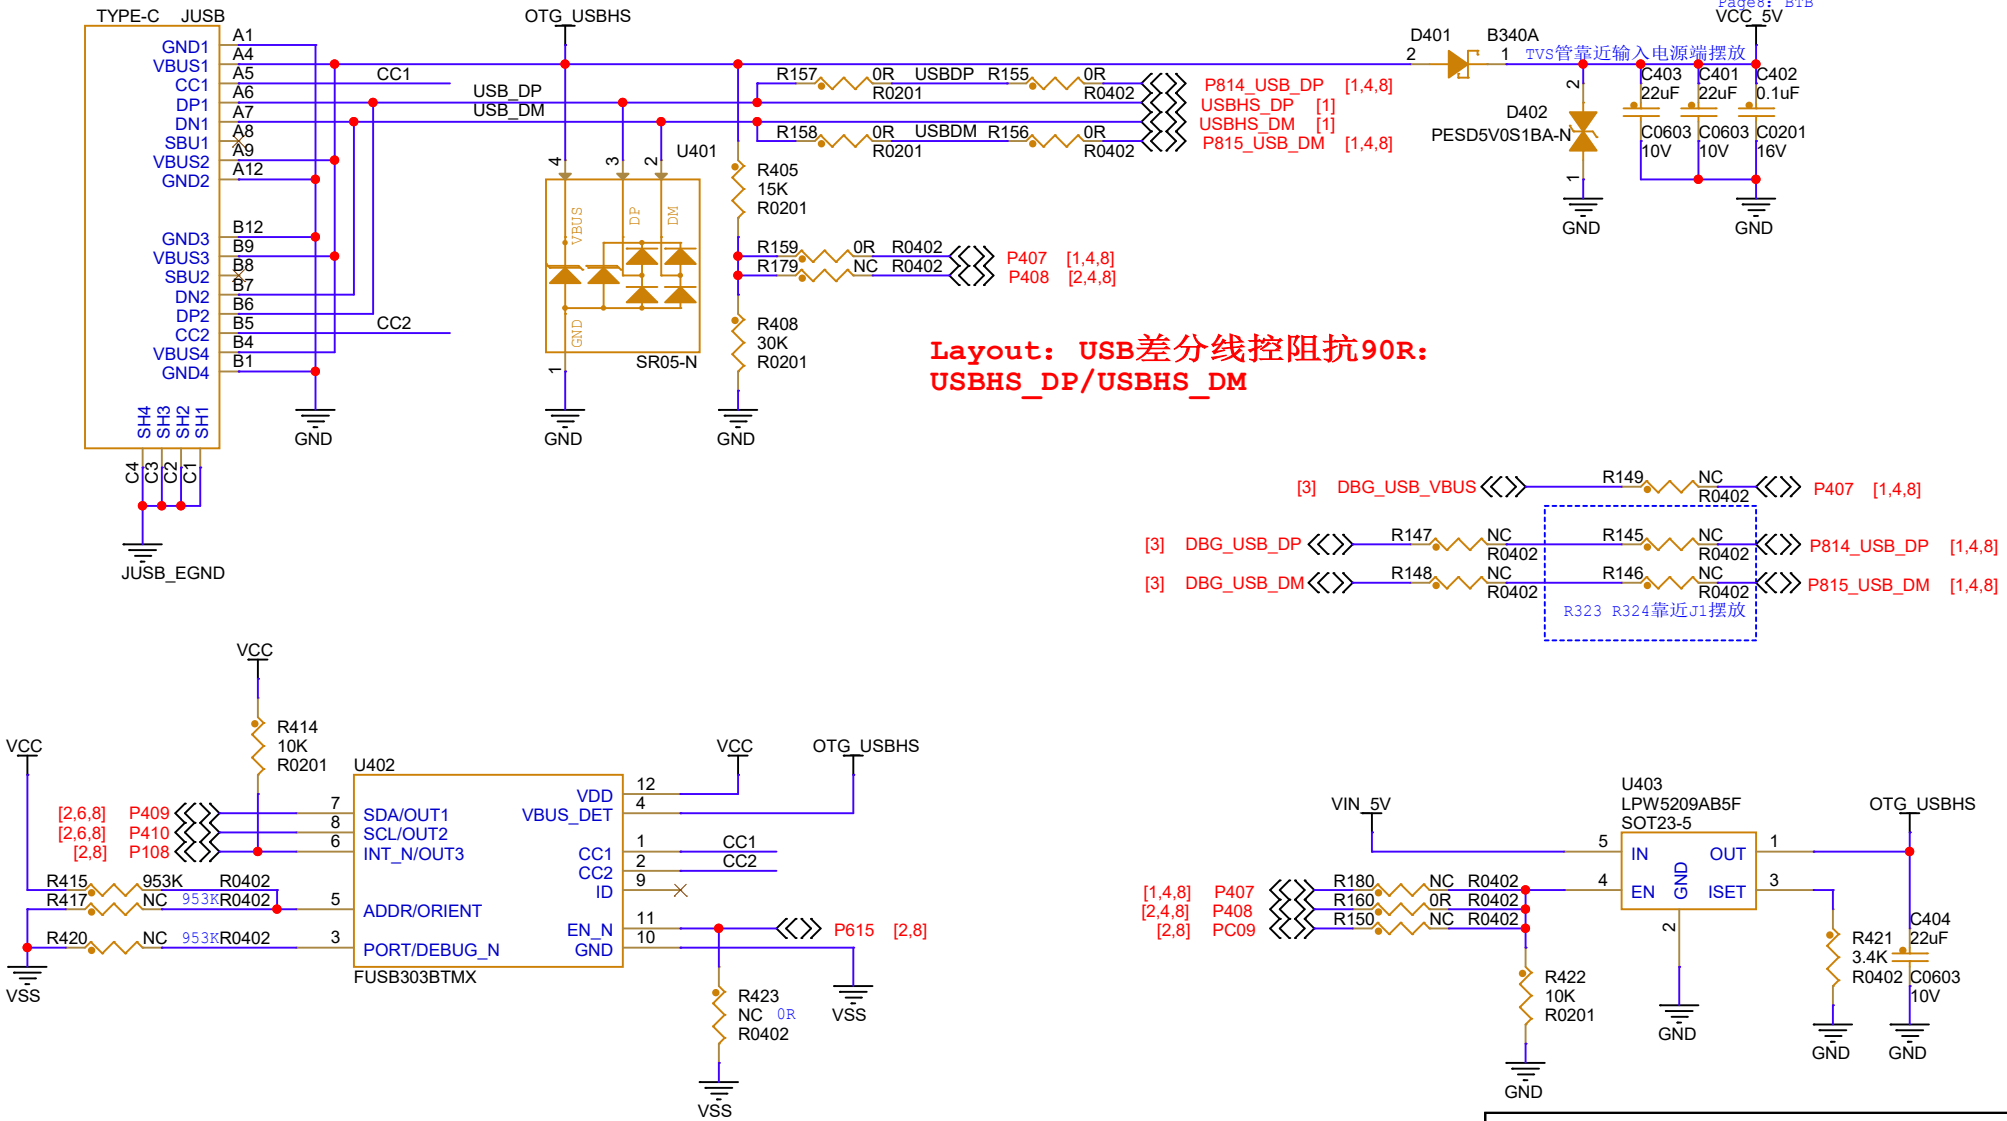

Layout: USB差分线控阻抗90R:
USBHS_DP/USBHS_DM




瑞萨电子www.renesas.com 东莞野火电子技术有限公司			
Title CPKCOR-RA8T2核心板			
Size A4	Document Number USB HS		Rev V1.0
Date:	Saturday, September 12, 2026		Sheet 4 of 10

FLASH

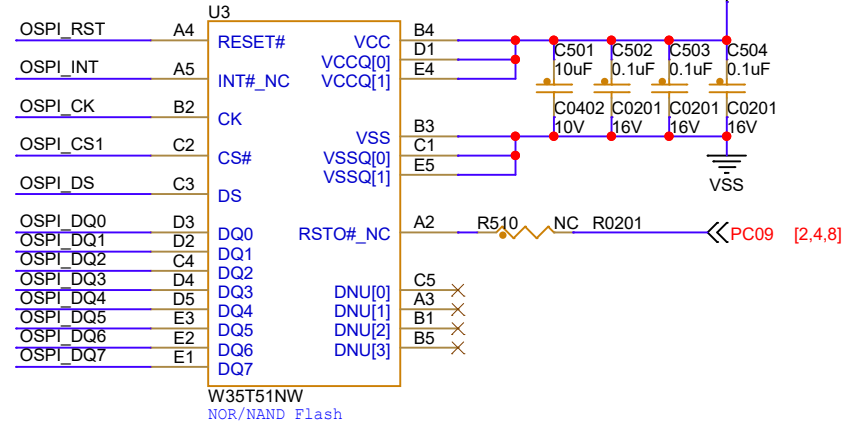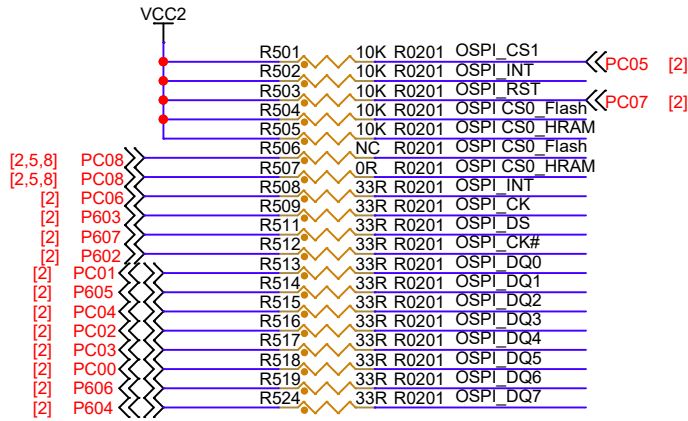

Page1: MCU 电源
Page2: MCU I/O
Page3: Jlink OB
Page4: USB HS
Page5: SDRAM
Page6: STORAGE MEMORY
Page7: 电源LDO/DCDC/MIPI/FLASH
Page8: BTB


SDRAM

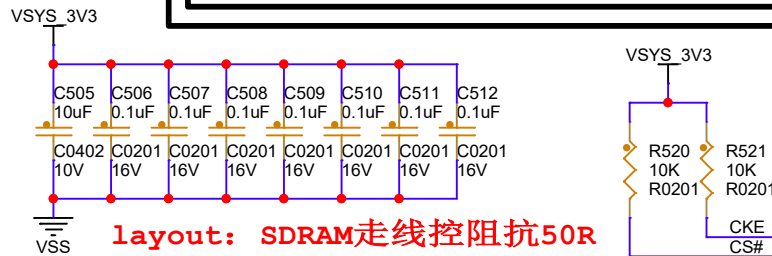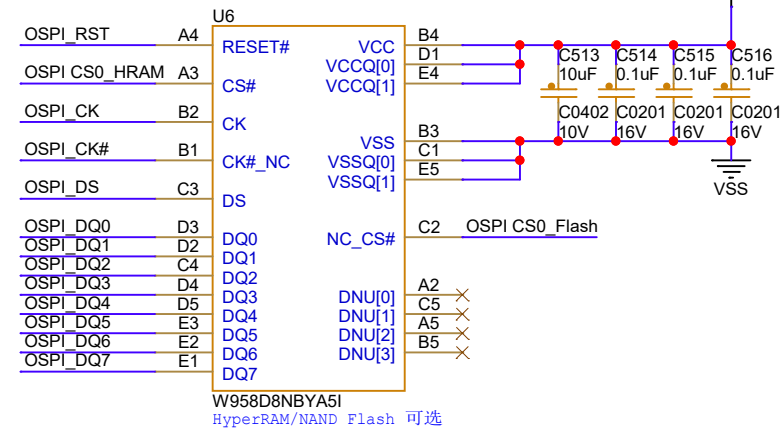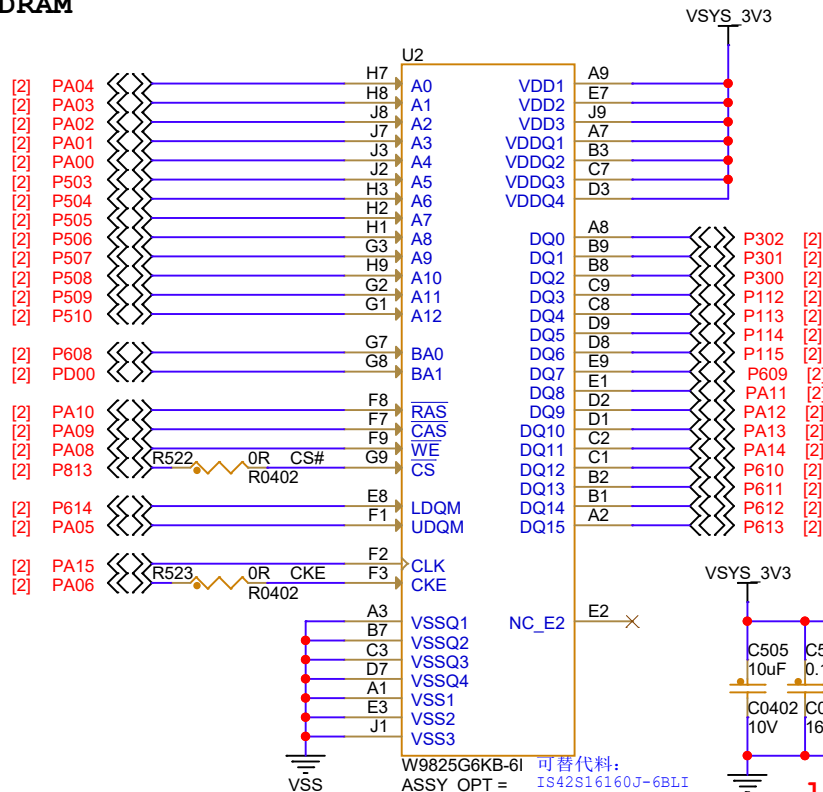

瑞萨电子www.renesas.com
东莞野火电子技术有限公司


Title CPKCOR-RA8T2核心板		
Size A4	Document Number SDRAM/FLASH	Rev V1.0
Date: Saturday, September 12, 2026	Sheet 5	of 10

MicroSD卡槽

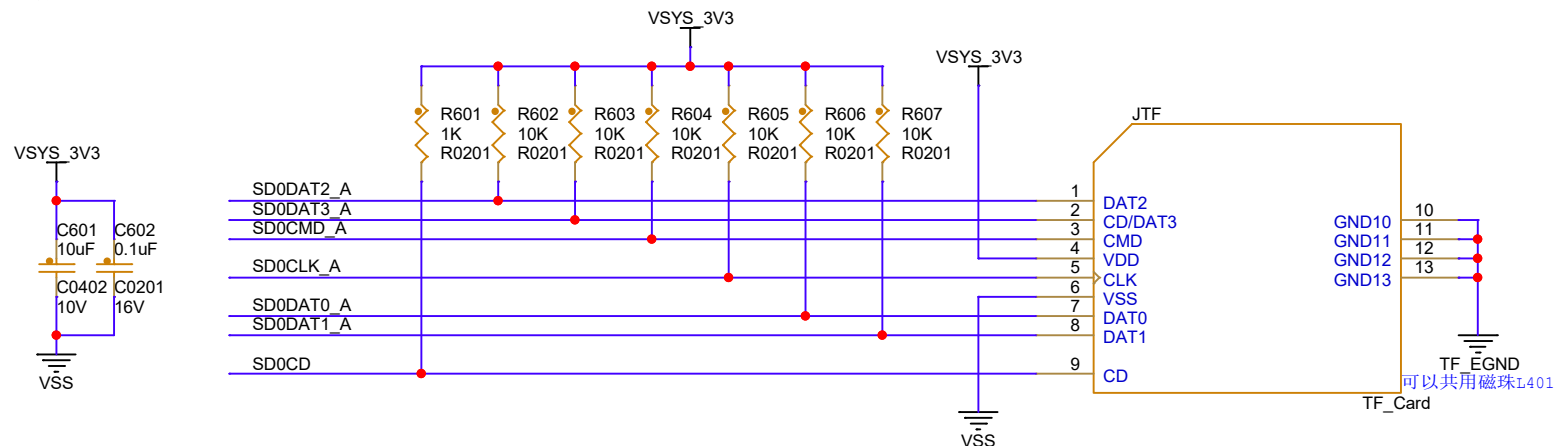


Page1: MCU 电源
Page2: MCU I/O
Page3: Jlink OB
Page4: USB HS
Page5: SDRAM
Page6: STORAGE MEMORY
Page7: 电源LDO/DCDC/MIPI/FLASH
Page8: BTB


电平转换和接口保护

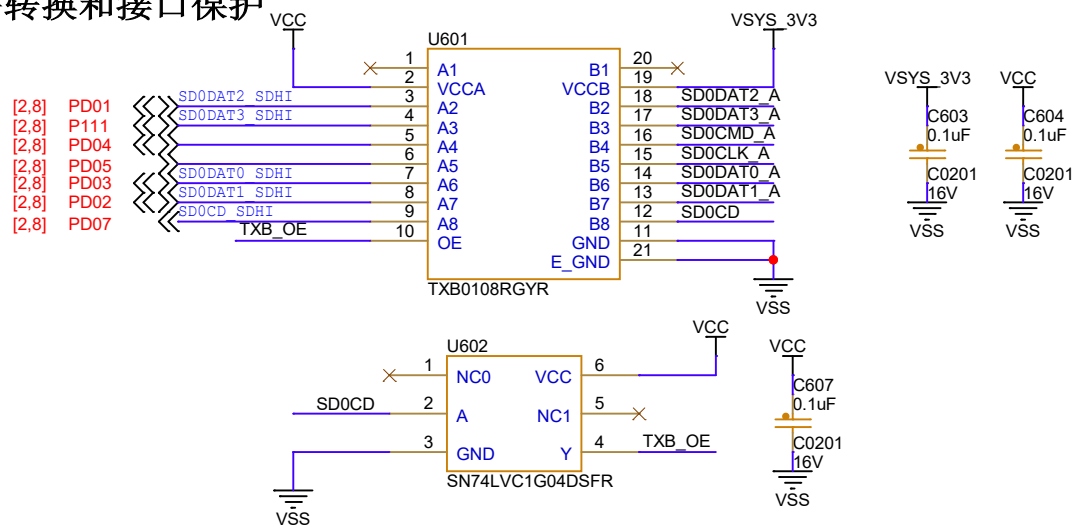

MIPI

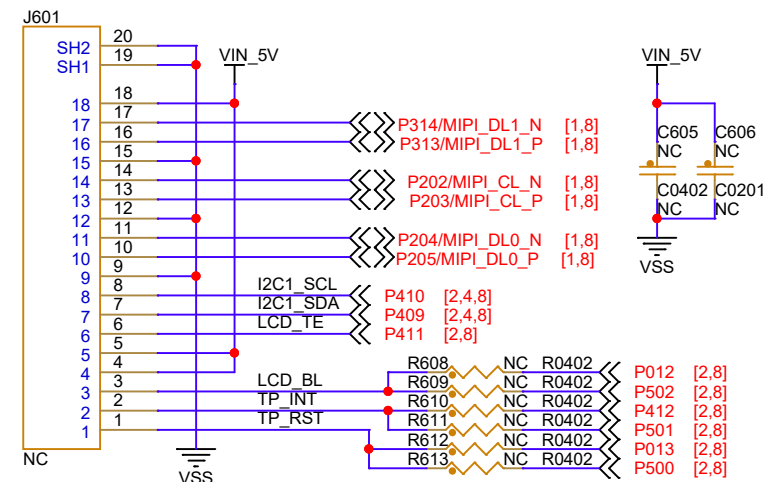



地磁传感器

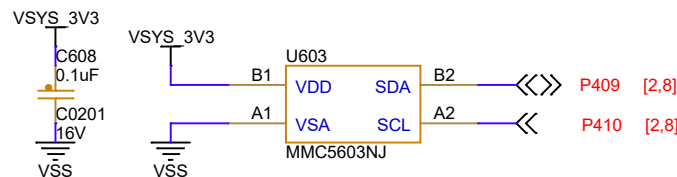


瑞萨电子 www.renesas.com
东莞野火电子技术有限公司

Title			
CPKCOR-RA8T2核心板			
Size	Document Number	Rev	
A4	SD CARD/MIPI	V1.0	
Date:	Saturday, September 12, 2026	Sheet 6	of 10


电源分割

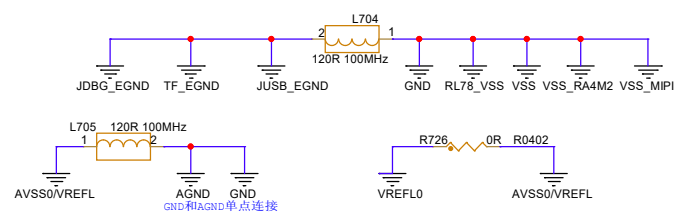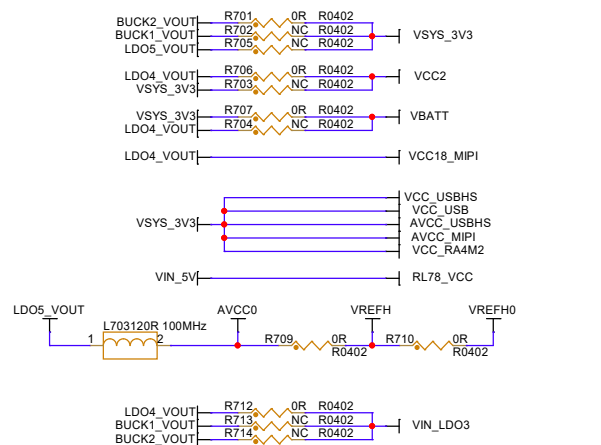


电源保护

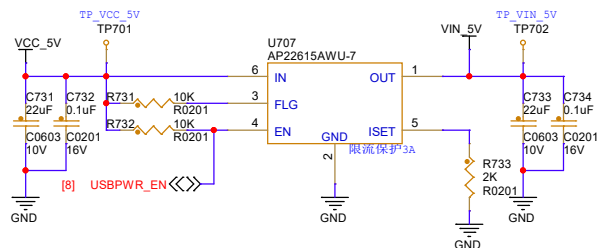


PMIC

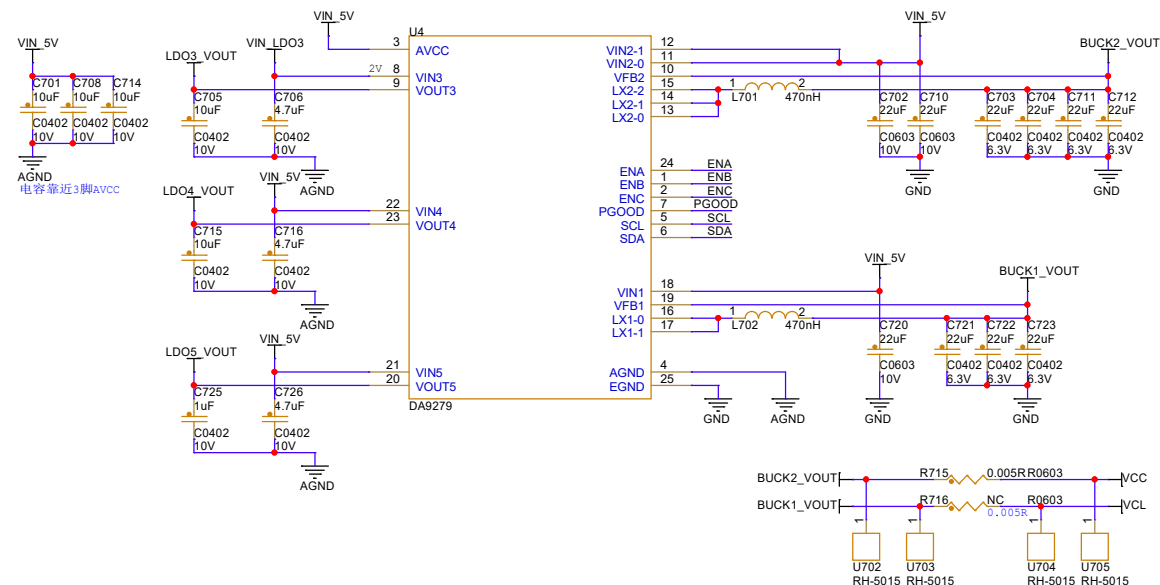

MCU

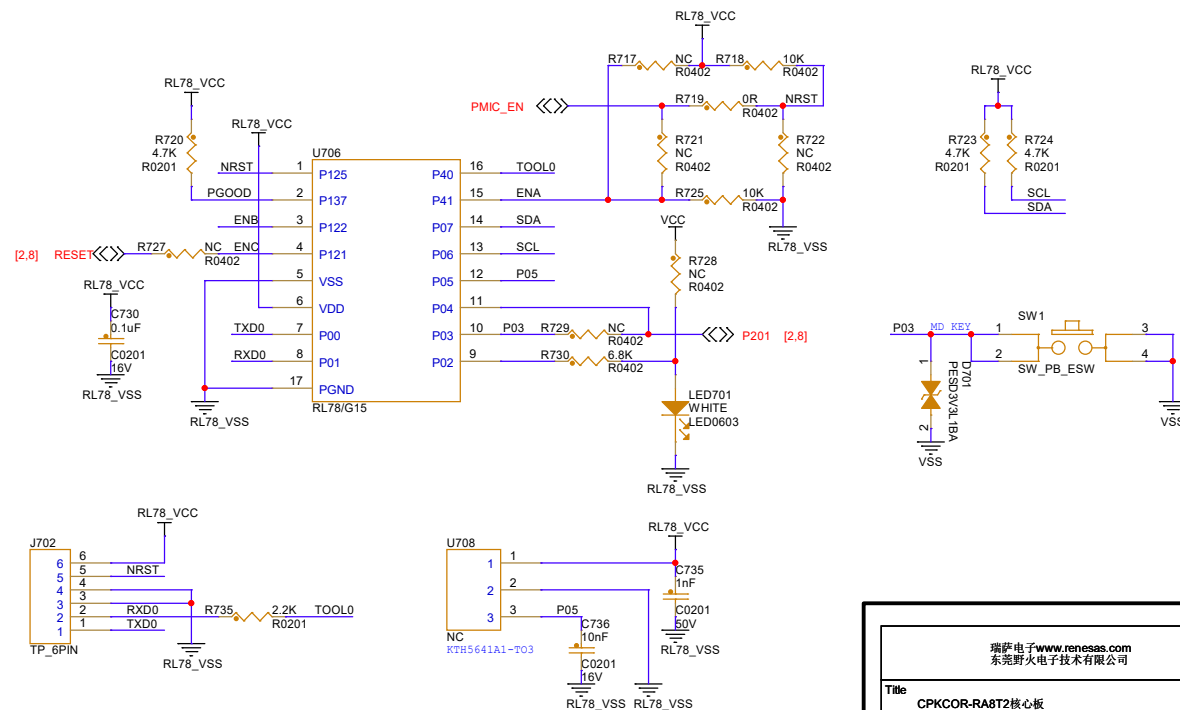

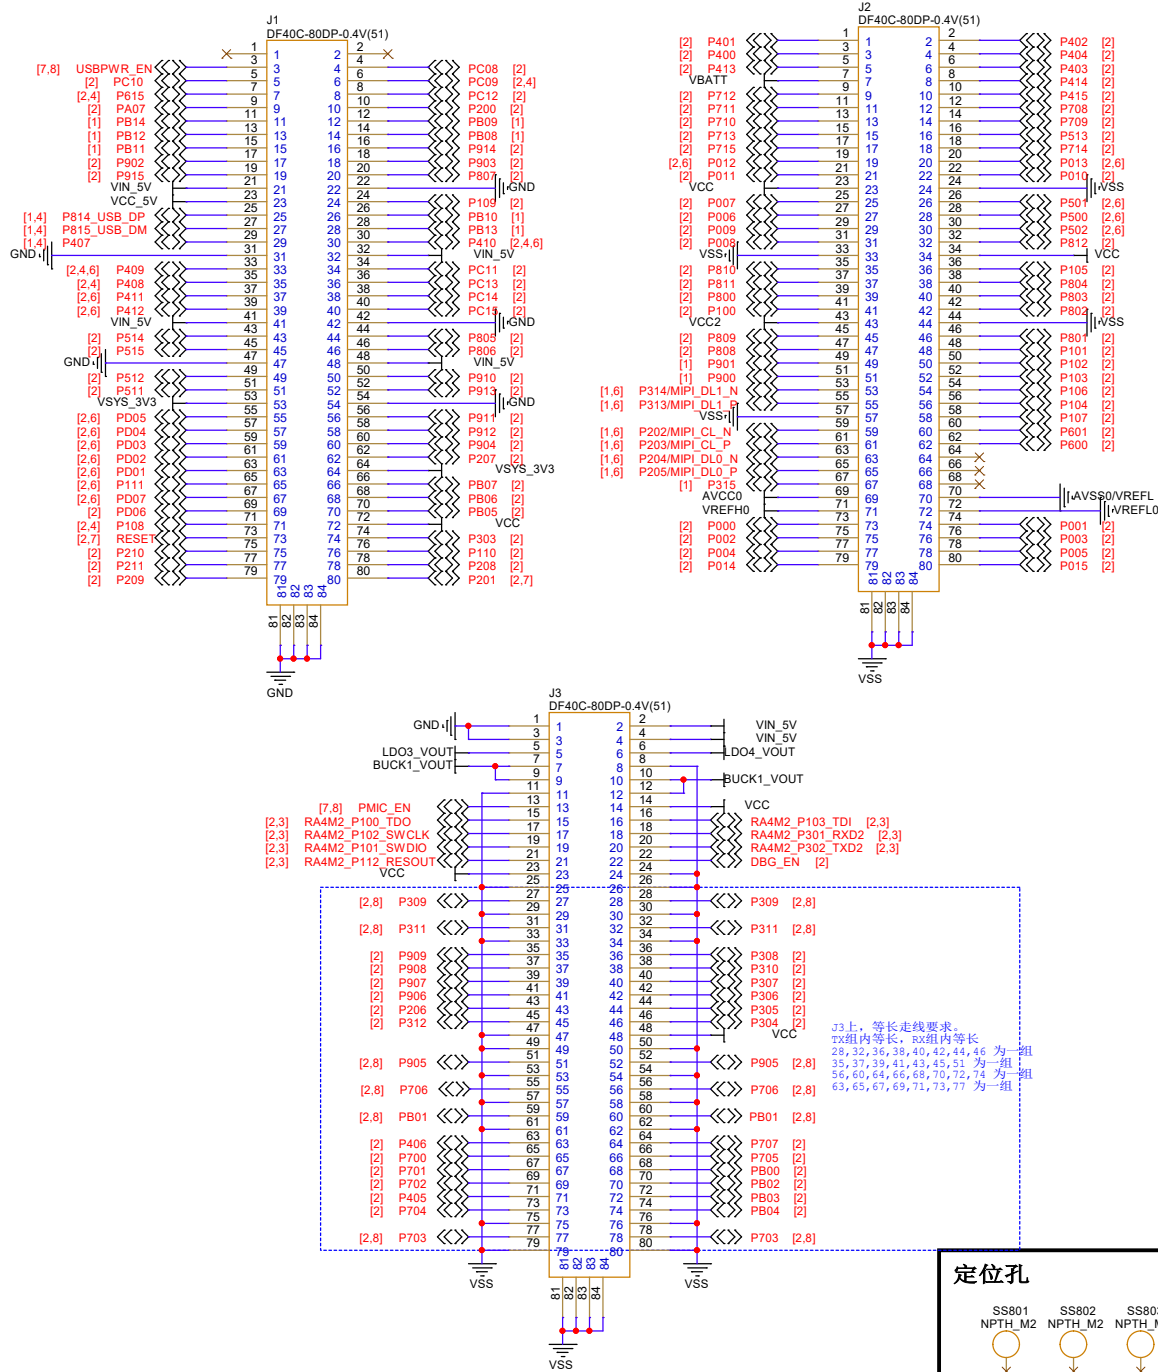

定位孔

SS801 NPTH_M2

SS802 NPTH_M2

SS803 NPTH_M2

SS804 NPTH_M2

瑞萨电子www.renesas.com 东莞野火电子技术有限公司		
Title CPKCOR-RA8T2核心板		
Size A3	Document Number BTB	Rev V1.0
Date: Saturday, September 12, 2026	Sheet 8	of 10

历史版本

版本号	日期	设计	描述
V1.0	2026-06-08	LPC	初版发行


瑞萨电子www.renesas.com 东莞野火电子技术有限公司		
Title CPKCOR-RA8T2核心板		
Size A4	Document Number 历史版本	Rev V1.0
Date: Saturday, September 12, 2026	Sheet 9	of 10

CPKCOR-RA8T2核心板_原理图_V1.0

目录

Page 1	MCU电源
Page 2	MCU I/O
Page 3	Jlink OB
Page 4	USB HS
Page 5	SDRAM/FLASH
Page 6	SD CARD/MIPI
Page 7	PMIC
Page 8	BTB
Page 9	历史版本
Page 10	目录
Page 11	
Page 12	
Page 13	
Page 14	

ART FILM - ADT

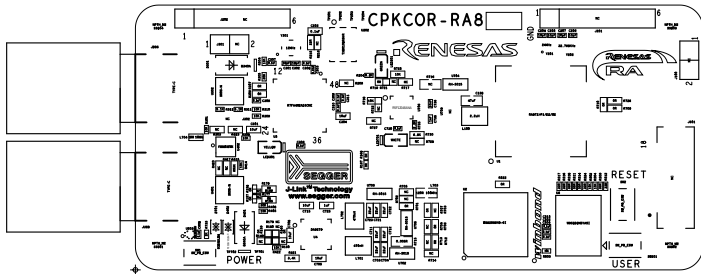

ART FILM - ADT

CPKCOR-RA8T2 Power Supply Diagram

