
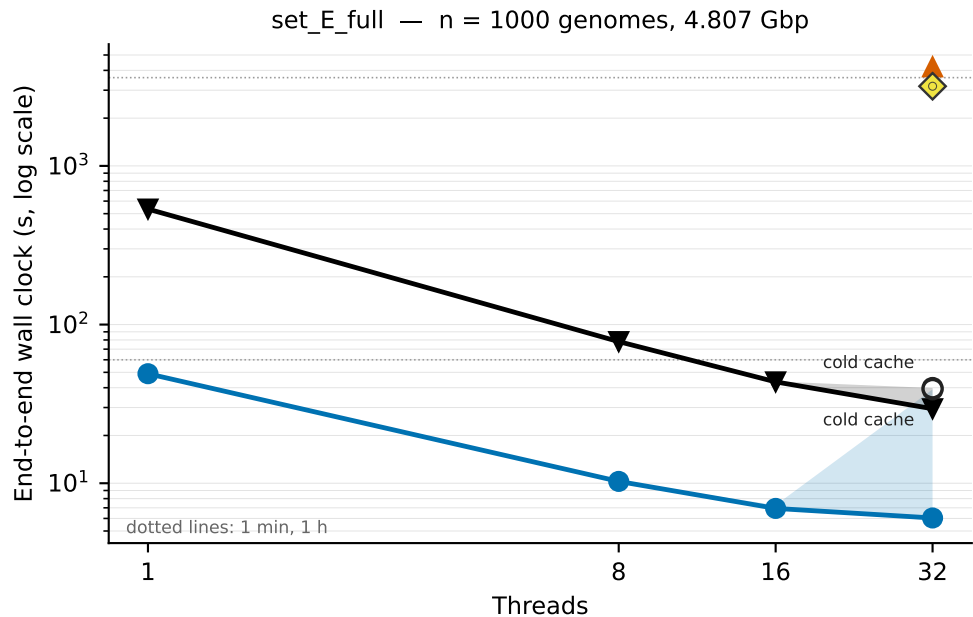


Matched-hardware, matched-input end-to-end wall clock
median (line) with full min-max range (band); every individual repeat plotted

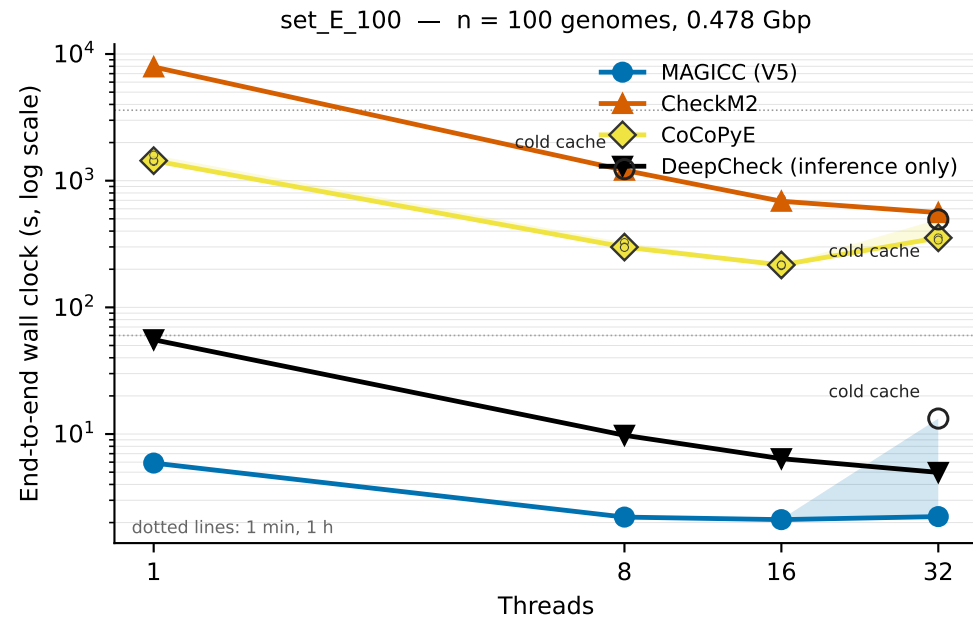

Wall clock = process start to results written, including model/database load. 48-core host, uncompressed FASTA on local ext4, page cache warm except where marked.

Ringed points are the first run to touch that input set or database after the host reboot and read it from disk; they are retained in every median and range.

CVD-safe palette (min CIE76 dE = 33.4 across normal, deuteranopic, protanopic and tritanopic vision); marker shape is redundant with colour.