



DOMETIC AWNINGS

INSTALL AND SERVICE

Danny Newman February 2026
Jarod Blackbourn August 2026



8700 MANUAL AWNING

8700 AWNING ITEM CODES AND DESCRIPTIONS

Note: “Awning” is the roller tube and fabric only – hardware is ordered separately.
(Careful when quoting)

Item No.	SKU No.	Description
878WH10	9600026975	8700 AWNING 10' POLAR WHITE
878WH11	9600026977	8700 AWNING 11' POLAR WHITE
878WH12	9600026979	8700 AWNING 12' POLAR WHITE
878WH13	9600026981	8700 AWNING 13' POLAR WHITE
878WH14	9600026983	8700 AWNING 14' POLAR WHITE
878WH15	9600026985	8700 AWNING 15' POLAR WHITE
878WH16	9600026987	8700 AWNING 16' POLAR WHITE
878WH17	9600026989	8700 AWNING 17' POLAR WHITE
878WH18	9600026991	8700 AWNING 18' POLAR WHITE
878WH19	9600026993	8700 AWNING 19' POLAR WHITE
878WH20	9600026995	8700 AWNING 20' POLAR WHITE
878WH21	9600026997	8700 AWNING 21' POLAR WHITE

Item No.	SKU No.	Description
878BK10	9600026976	8700 AWNING 10' CHARCOAL BLACK
878BK11	9600026978	8700 AWNING 11' CHARCOAL BLACK
878BK12	9600026980	8700 AWNING 12' CHARCOAL BLACK
878BK13	9600026982	8700 AWNING 13' CHARCOAL BLACK
878BK14	9600026984	8700 AWNING 14' CHARCOAL BLACK
878BK15	9600026986	8700 AWNING 15' CHARCOAL BLACK
878BK16	9600026988	8700 AWNING 16' CHARCOAL BLACK
878BK17	9600026990	8700 AWNING 17' CHARCOAL BLACK
878BK18	9600026992	8700 AWNING 18' CHARCOAL BLACK
878BK19	9600026994	8700 AWNING 19' CHARCOAL BLACK
878BK20	9600026996	8700 AWNING 20' CHARCOAL BLACK
878BK21	9600026998	8700 AWNING 21' CHARCOAL BLACK


Polar White



Charcoal Black



Colour designation above is correct; the colour stated is the colour that the awning fabric is at the sail track on the RV.

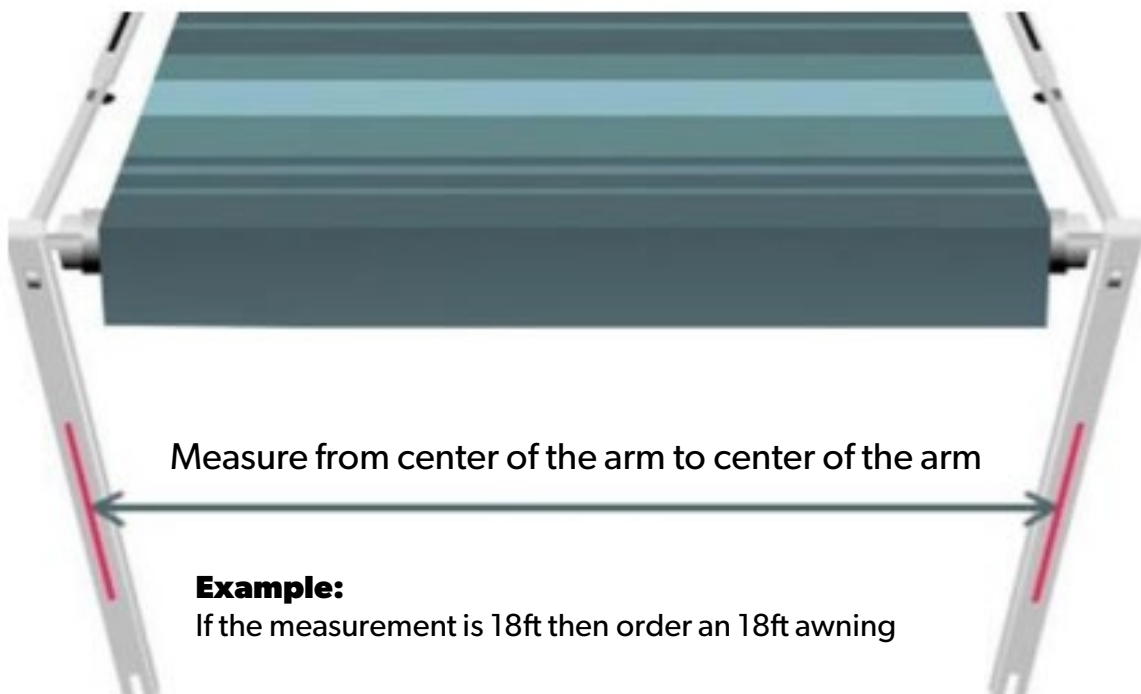

HOW TO MEASURE AWNING

FT	MM
10	3048
11	3353
12	3658
13	3962
14	4267
15	4572
16	4877
17	5182
18	5486
19	5791
20	6096
21	6401

8700 HARDWARE ITEM CODES AND DESCRIPTIONS


Item code	Description
878HS-BK	Hardware standard Black
878HS-WH	Hardware standard White
878HT-BK	Hardware Tall Black
875HT-WH	Hardware Tall White
878HU-BK	Hardware Ultra Short Black
878HU-WH	Hardware Ultra Short White

Polar White



Charcoal Black



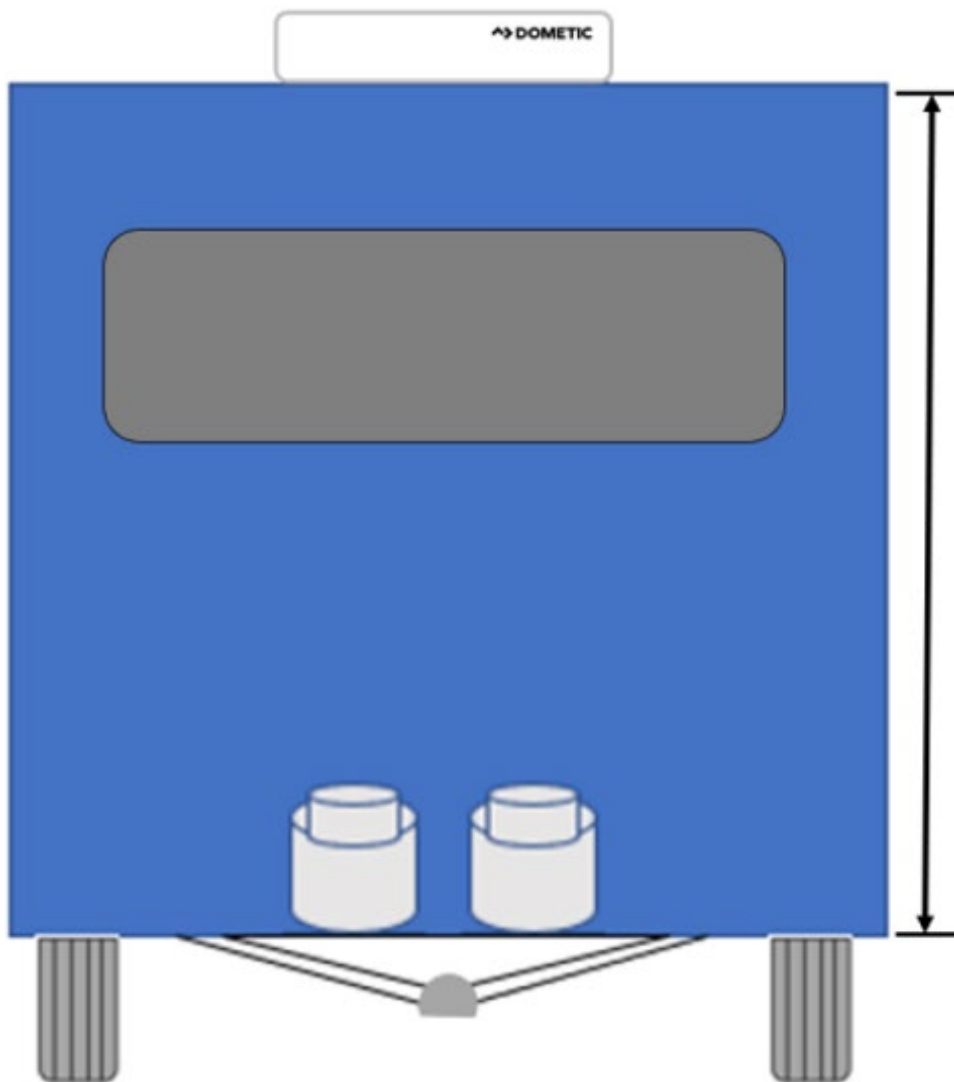

Measure the minimum wall height required for hardware.

Example:
If the van height is 1500mm
order a standard hardware

HOW TO MEASURE Hardware

Item code	Description	Minimum Length
878HS-BK	Hardware Standard Black	1620mm
878HS-WH	Hardware Standard White	1620mm
878HT-BK	Hardware Tall Black	1925mm
875HT-WH	Hardware Tall White	1925mm
878HU-BK	Hardware Ultra Short Black	1475mm
878HU-WH	Hardware Ultra Short White	1475mm

ACCESSORIES

Anti Flap Kit

The Anti-Flap Kit helps stabilise the awning and reduces movement and flapping in windy conditions.

Projection standard 2100 – 2300mm

Projection long 2250 – 2450mm

Curved Roof Rafter

The curved roof rafter helps support the awning fabric and promotes water runoff, particularly on larger awnings.

Projection 2100 – 2450mm

SKU	Item Description	Product Options
9620015822	Anti-Flap Kit (AFK)	Standard Black
9620015824	Anti-Flap Kit (AFK)	Long Black
9620015826	Anti-Flap Kit (AFK)	Standard White
9620015825	Anti-Flap Kit (AFK)	Long White
9620015827	Curved Roof Rafter (CRR)	Anodised Silver



ANTI FLAP KIT & CURVED ROOF RAFTER



8700 AWNING

RECENT CHANGES



Awning fabric used to be folded and stitched on each side



Awning fabric from mid 2025 is clean cut with no folding and stitching

Note: If replacing an older awning, some opposition anti-flap kits do not close in far enough to be tight on the fabric; Dometic anti-flap kits close to completion so do not have that problem.



The roller tube is not that hard to dent in shipment/handling; a new flat finish makes it harder to see small dents/blemishes.

Note: If you do accidentally dent the tube – don't stress, take the fabric out of the sail track (there are 3 of them) and rotate the tube to use an alternative track that places the dent underneath the fabric and therefore not visible.



TORSION ASSEMBLY REMOVING



If care is not taken when removing a torsion assembly, it is possible that the internal spring will cause the end cap to spin very suddenly and could cause injury.

Tips

- When replacing a torsion assembly, most find it easier to tension the roller before the awning is mounted on the RV this also prevents damage to the wall of the RV if a slip occurs.
- When drilling out the rivets, insert a holding pin into the end cap holes (circled) to prevent the torsion assembly from unwinding unexpectedly.
Line up pin (A) with hole (B) and you will be close to being able to push the pin straight in.

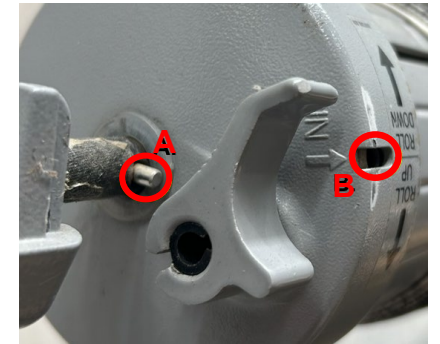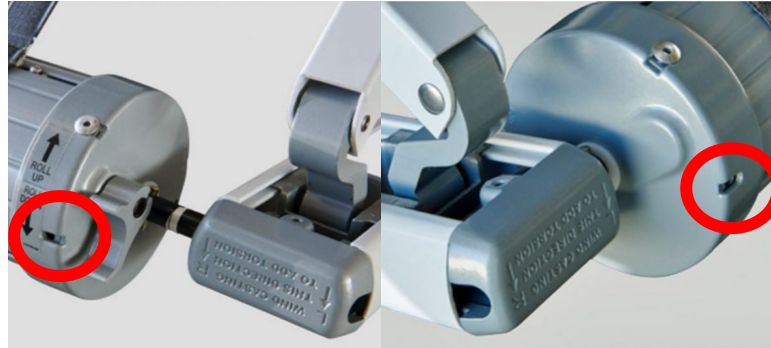

- Once a suitable winding/unwinding tool is securely installed and supporting the spring tension, the holding pin can be removed.
- Carefully use the tool to gradually unwind the torsion assembly until all spring tension has been released.



Holding Pin

It's handy to keep a couple of holding pins from an when a new awning is installed.



Tensioning Tool

Custom made tool to make tensioning safer and easier.

TORSION ASSEMBLY TENSIONING




Use extreme care when winding/unwinding the arm cap. If not controlled, the spring tension will attempt to spin the arm cap quickly and unexpectedly

The number of turns to achieve the correct torsion spring tension depends on the awning model and width.


If awning is installed on the RV and extended 2 revolutions from the awning rail, add 2 turns to the number in the table, add 6 additional turns if awning is fully extended.

Awning Width	Number of Turns
8 ft – 12 ft	8
13 ft – 14 ft	9
15 ft – 16 ft	10
17 ft – 21 ft	12


Once the torsion assembly has been tensioned to the correct number of turns insert the holding pin then insert the awning cap into the hardware.

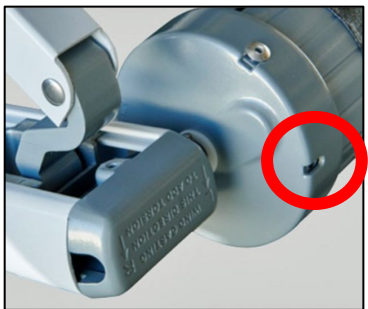


Ensure holding pins are installed in both torsion assemblies,
You can use tape to hold pin for extra assurance

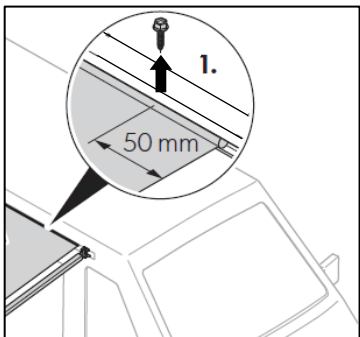

Remove the screws holding the awning fabric in the sail track.

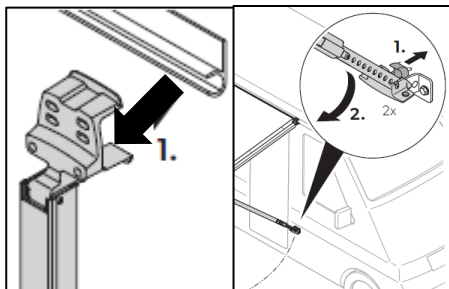

Remove the awning hardware from the RV.

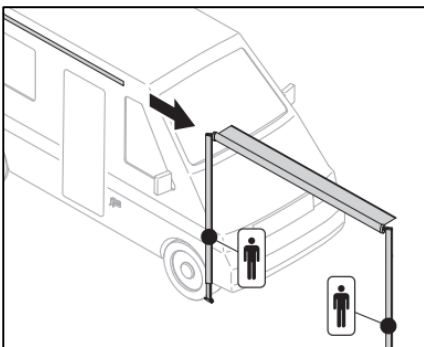

Using 2 people slide the fabric off one end of the sail track.

(The hardware can remain connected to the RV to do this, or you can also remove the hardware.)

AWNING CHANGEOVER

NOTE: For replacement fabric jobs you will receive the full tube and fabric assembly.

ISSUES YOU MAY SEE

1. Fabric stitching leaking

This can be solved by applying a seam sealer to the fabric stitching. Even some brand-new fabrics could allow water through the stitch holes in the right conditions. Normally a few days in the sun causes the fabric to seal to the stitches, but seam sealer is available for stubborn cases.

We suggest **Gear Aid Seam Grip WP**

2. Dent in roller tube

Careless handling or a simple mishap can cause small dents in the roller tube. Customers generally do not like this of course. It is not necessary in a lot of cases to replace the tube to remove this cosmetic issue, simply remove the fabric from the roller tube sail track, turn the roller 1/3 and then reinsert the fabric to the sail track. The dent is no longer visible and as Danny used to say, *"what the eye does not see the heart will not grieve"*!

3. Rippling of the fabric or small delamination spots.

Also, a cosmetic issue and does not stop the awning from doing what it is designed to do. Some small imperfections could be considered normal – this is basically a piece of vinyl after all. More severe cases may need warranty exchange. Some customers are more sensitive than others. Things like bird or bat poop left on an awning in the sun may cause some spotting. Cleaning after a trip is recommended.


4. Storm damage.

It is recommended in the manual that awnings are rolled in during heavy or prolonged wind or rain. **Storm damage is not covered by warranty.** The product is designed specifically as an awning, rather than an Annex roof; if being used as an Annex roof, the customer is unlikely to roll the awning in when the wind picks up, so they need to be advised to have a proper slope on the awning so that a dam of rainwater cannot build up on the awning, and secure it with guy ropes to prevent the wind turning ripping it off the RV. The Dometic recommendation is that the awning is rolled in for stormy weather.

5. Usage damage.

Rolling the awning up wet or applying chemicals when cleaning can cause cosmetic damage to the fabric. Recommend drying the awning prior to rolling up and only using warm soapy water to clean the awning then let it dry in the sun.


PREVENTING POTENTIAL ISSUES

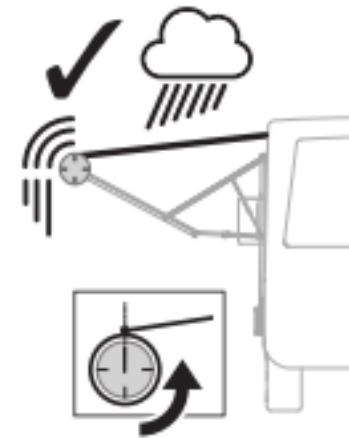

Awning needs to be set up with tension in such a way that a pool or dam is not created behind the roller tube when the awning is extended.

If an unexpected downpour occurs a large qty of water may quickly fill the "dam" and cause damage to the fabric and the roller tube.

"Dropping" one end of the awning slightly also helps with water run off.

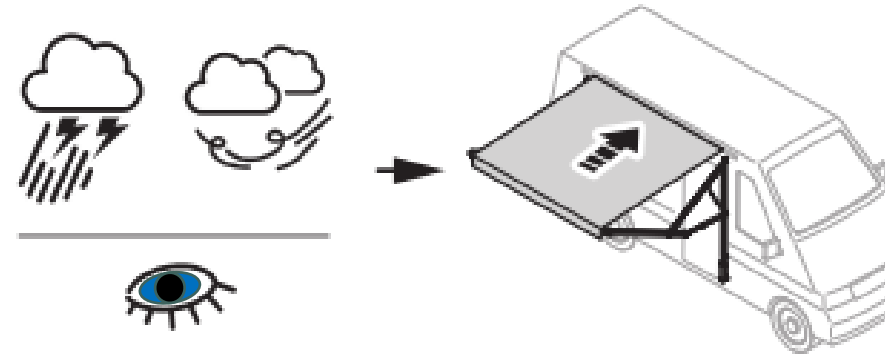

Customer should always be advised that if they see or expect stormy weather coming then the awning should be retracted.

PARTS BREAKDOWN


8700 MANUAL AWNING

White

Ref	Item No	Description
422	4453000181	PULL STRAP NYLON AWNING
431	4453000196	TORSION ASSY 8700 LH
432	4453000197	TORSION ASSY 8700 RH
430	4453000198	CAP TOP 8700 AWN H/WARE
	4453001170	BOLTS & WASHERS 8700 (2)
501	4453000045	ARM MAIN TALL LH AWN H/W WHT
501	4453000047	ARM MAIN TALL RH AWN H/W WHT
501	4453000049	ARM MAIN SHT LH AWN H/W WHT
501	4453000051	ARM MAIN STD/SHT RH AWN H/W WH
502	4453000031	RAFTER MAIN TALL AWN H/W WHT
502	4453000033	RAFTER MAIN SHT AWN H/WARE WHT
503	4453000037	RAFTER SEC TALL AWN H/WARE WHT
503	4453000039	RAFTER SEC SHT AWN H/WARE WHT
504	4453000042	ARM INNER AWN H/WARE WHT
505	4453000044	FOOT AWNING AWN H/WARE
506	4453000053	LIFT HANDLE AWN H/WARE
507	4453000055	LOCK SAFETY AWN H/WARE
508	4453000036	KNOB & NUT T/S AWN RAFTER
509	4453000056	ROD EZ PULL AWN H/WARE
510	4453000041	SLIDER ASSY & RIVET AWN H/WARE
510-B	4453000152	RIVET SLIDER ASSY AWN H/W 30MM
511	4453000035	BRACKET TOP MOUNTING AWN H/W
511-A	4453000151	RIVET MAIN RAFTR AWN H/W 35MM
512	4453000054	SLIDER CATCH AWN H/WARE
517	4453000057	BRACKET BOTTOM AWN H/WARE
	4453000058	ROLLER ASSY DOOR AWN
	4453000059	KIT INSTALL AWN H/WARE

Black

Ref	Item No	Description
422	4453000181	PULL STRAP NYLON AWNING
431	4453000196	TORSION ASSY 8700 LH
432	4453000197	TORSION ASSY 8700 RH
430	4453000198	CAP TOP 8700 AWN H/WARE
	4453001170	BOLTS & WASHERS 8700 (2)
501	4453000046	ARM MAIN TALL LH AWN H/W BLK
501	4453000048	ARM MAIN TALL RH AWN H/W BLK
501	4453000050	ARM MAIN STD/SHT LH AWN H/W BK
501	4453000052	ARM MAIN STD/SHT RH AWN H/W BK
502	4453000032	RAFTER MAIN TALL AWN H/W BLK
502	4453000034	RAFTER MAIN SHT AWN H/WARE BLK
503	4453000038	RAFTER SEC TALL AWN H/WARE BLK
503	4453000040	RAFTER SEC SHT AWN H/WARE BLK
504	4453000043	ARM INNER AWN H/WARE BLK
505	4453000044	FOOT AWNING AWN H/WARE
506	4453000053	LIFT HANDLE AWN H/WARE
507	4453000055	LOCK SAFETY AWN H/WARE
508	4453000036	KNOB & NUT T/S AWN RAFTER
509	4453000056	ROD EZ PULL AWN H/WARE
510	4453000041	SLIDER ASSY & RIVET AWN H/WARE
510-B	4453000152	RIVET SLIDER ASSY AWN H/W 30MM
511	4453000035	BRACKET TOP MOUNTING AWN H/W
511-A	4453000151	RIVET MAIN RAFTR AWN H/W 35MM
512	4453000054	SLIDER CATCH AWN H/WARE
517	4453000057	BRACKET BOTTOM AWN H/WARE
	4453000058	ROLLER ASSY DOOR AWN
	4453000059	KIT INSTALL AWN H/WARE

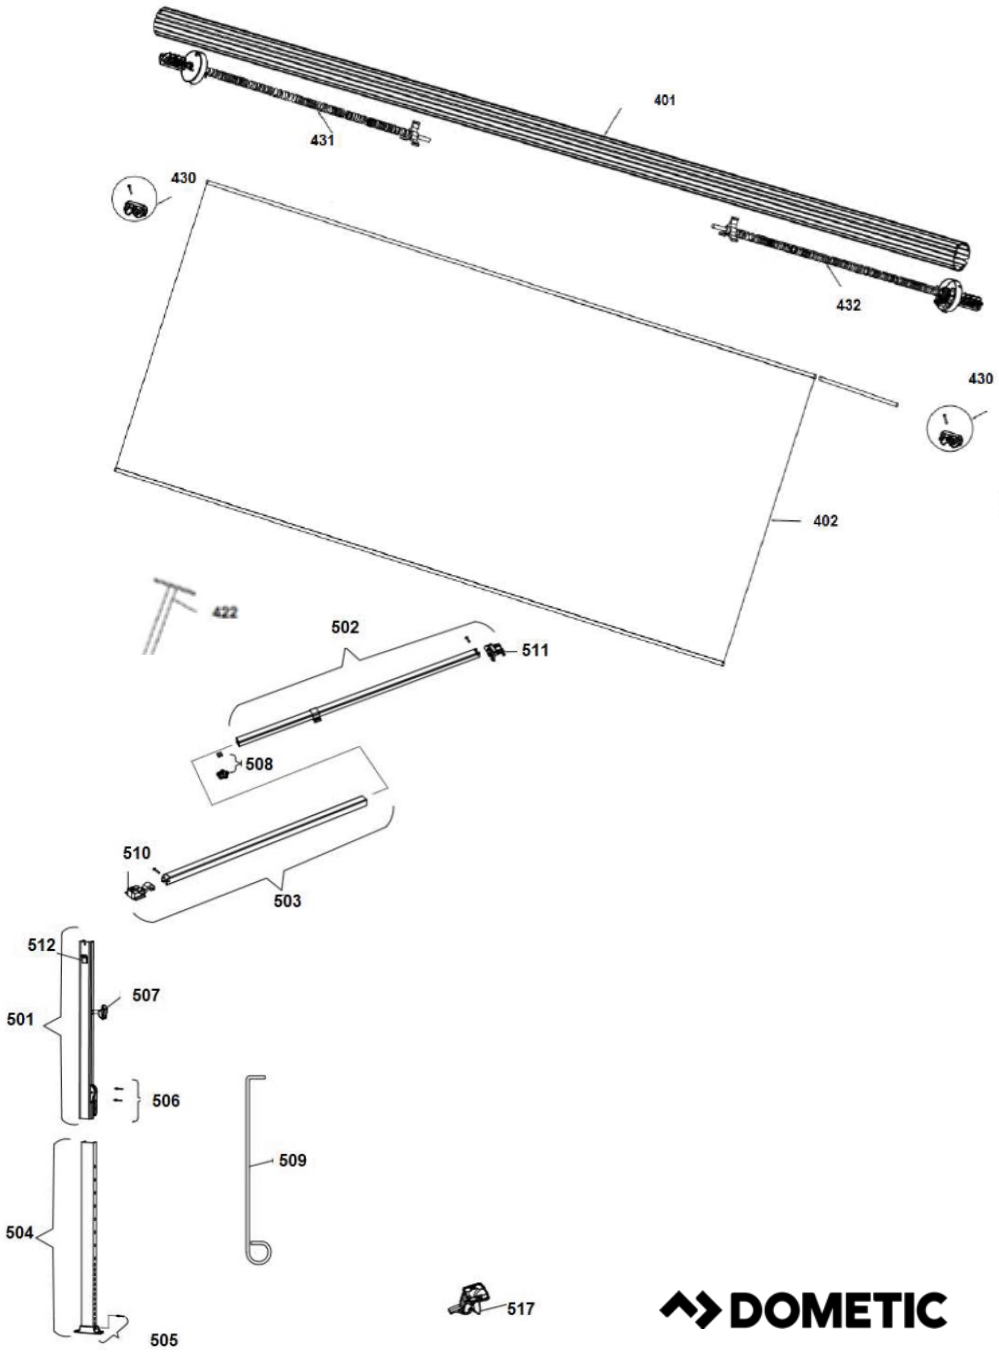



9700 POWER AWNING

Now Available

Dometic 9700 Power Awnings

Awnings

SKU	Item Description
9620013535	9700 POWER AWNING 13' WH
9620013536	9700 POWER AWNING 13' BK
9620013537	9700 POWER AWNING 14' WH
9620013538	9700 POWER AWNING 14' BK
9620013539	9700 POWER AWNING 15' WH
9620013540	9700 POWER AWNING 15' BK
9620013541	9700 POWER AWNING 16' WH
9620013542	9700 POWER AWNING 16' BK
9620013543	9700 POWER AWNING 17' WH
9620013544	9700 POWER AWNING 17' BK
9620013545	9700 POWER AWNING 18' WH
9620013546	9700 POWER AWNING 18' BK
9620013547	9700 POWER AWNING 19' WH
9620013548	9700 POWER AWNING 19' BK
9620013549	9700 POWER AWNING 20' WH
9620013550	9700 POWER AWNING 20' BK

Hardware

SKU	Item Description
9620013552	9700 POWER AWN HDW STD BK
9620013554	9700 POWER AWN HDW STD WH

Accessories (sold separately)

SKU	Item Description
9620013553	9700 ROCKER SWITCH
9620013551	9700 EXT LEG COVER WH
9620016962	9700 EXT LEG COVER BK



Rocker Switch



Extension Cover



9700 POWER AWNING

PRODUCT BENEFITS

Effortless Setup

No cranking, easy setup with rocker switch



Seamless Upgrade

Keep your existing mounting points and accessories.



Personalized Comfort

Control shade and shelter your way.



Space-Savvy Design

Fits your RV perfectly, every time.




KEY SAFETY POINTS WHEN INSTALLING


1. Keep in mind that Awning hardware has tension.



2. Left side of the awning **is** tensioned, right side (motor side) of the awning is **not** tensioned.

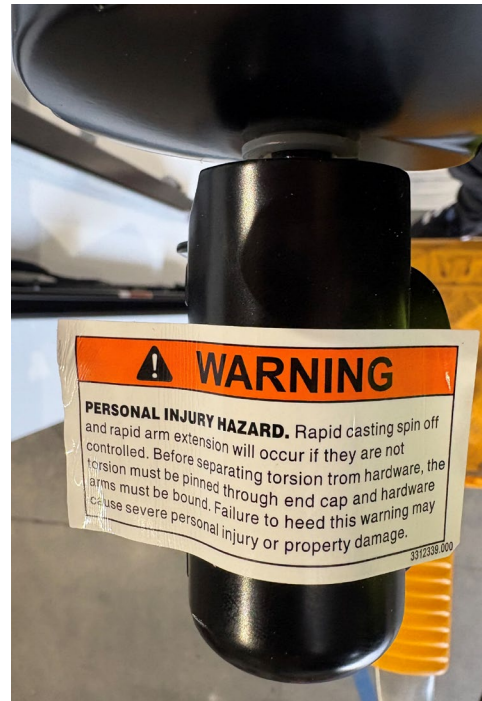

3. Ensure awning top casting is installed in the front channel.
a= Groove **b= Tongue**

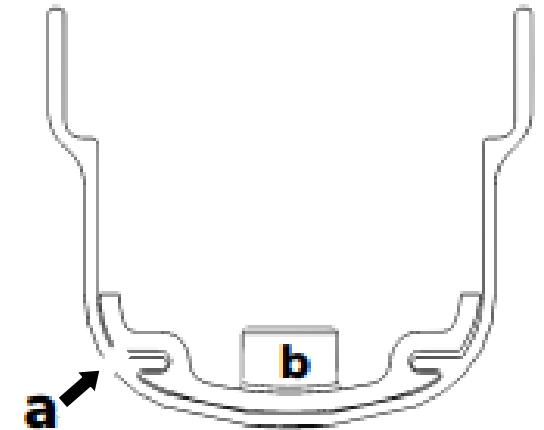

HARDWARE LEG COVER

Depending on the length the adjustable rod has been extended to, the middle section of the Extension Cover body may need to be shortened before fitting.

Quick Installation Guide



1 Remove pin 	2 Install nut and bolt 	3 Adjust to desired height 	4 Install pin 																		
5 Deploy awning 	6 Cut cover to size 	<table border="1"><thead><tr><th>Awning Height / Pin Hole #</th><th>Amount to Shorten</th></tr></thead><tbody><tr><td>1900 mm / 15th hole</td><td>No cut required</td></tr><tr><td>1875 mm / 14th hole</td><td>Shorten by 25 mm</td></tr><tr><td>1850 mm / 13th hole</td><td>Shorten by 50 mm</td></tr><tr><td>1825 mm / 12th hole</td><td>Shorten by 75 mm</td></tr><tr><td>1800 mm / 11th hole</td><td>Shorten by 100 mm</td></tr><tr><td>1775 mm / 10th hole</td><td>Shorten by 125 mm</td></tr><tr><td>1750 mm / 9th hole</td><td>Shorten by 150 mm</td></tr><tr><td>1725 mm / 8th hole</td><td>Shorten by 175 mm</td></tr></tbody></table>	Awning Height / Pin Hole #	Amount to Shorten	1900 mm / 15th hole	No cut required	1875 mm / 14th hole	Shorten by 25 mm	1850 mm / 13th hole	Shorten by 50 mm	1825 mm / 12th hole	Shorten by 75 mm	1800 mm / 11th hole	Shorten by 100 mm	1775 mm / 10th hole	Shorten by 125 mm	1750 mm / 9th hole	Shorten by 150 mm	1725 mm / 8th hole	Shorten by 175 mm	7 Install cover
Awning Height / Pin Hole #	Amount to Shorten																				
1900 mm / 15th hole	No cut required																				
1875 mm / 14th hole	Shorten by 25 mm																				
1850 mm / 13th hole	Shorten by 50 mm																				
1825 mm / 12th hole	Shorten by 75 mm																				
1800 mm / 11th hole	Shorten by 100 mm																				
1775 mm / 10th hole	Shorten by 125 mm																				
1750 mm / 9th hole	Shorten by 150 mm																				
1725 mm / 8th hole	Shorten by 175 mm																				


9700 AWNING WIRING

Motor Specifications

Parameter	Specification
Power Supply	DC12V (9-16VDC range)
Current	5.5A max
Motor Speed	26 RPM @ DC12V input
Torque	7.5 Nm @ DC12V input


Cable Sizing Table

Amps (A)	Up to 6m (Cable Length)	Up to 9m (Cable Length)
10 A (Fuse size)	1.3mm ² (16 AWG) (Cable Size)	2.1mm ² (14 AWG) (Cable Size)

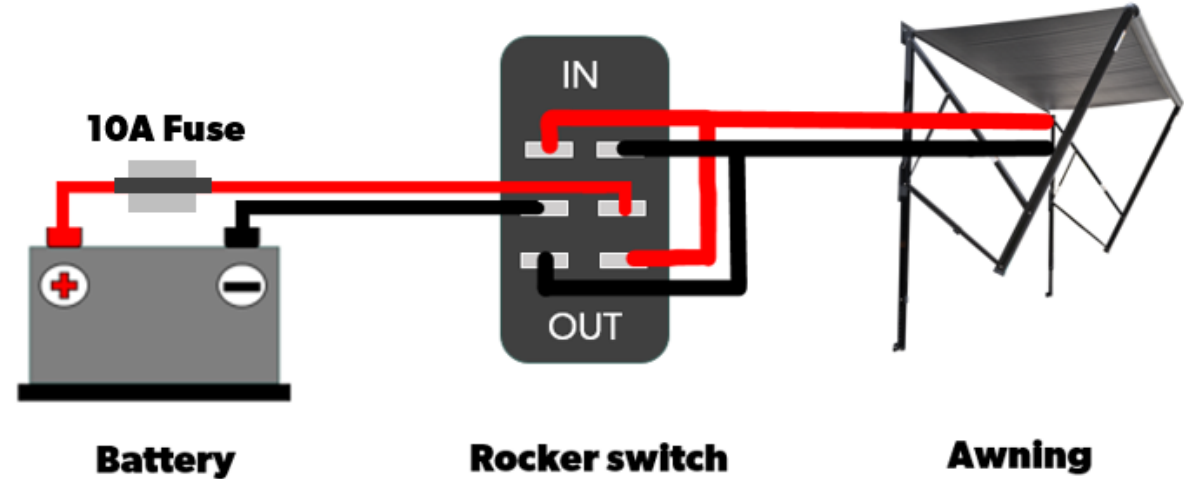


MANUAL OPERATION

The following steps are used to manual retract the awning in an emergency.

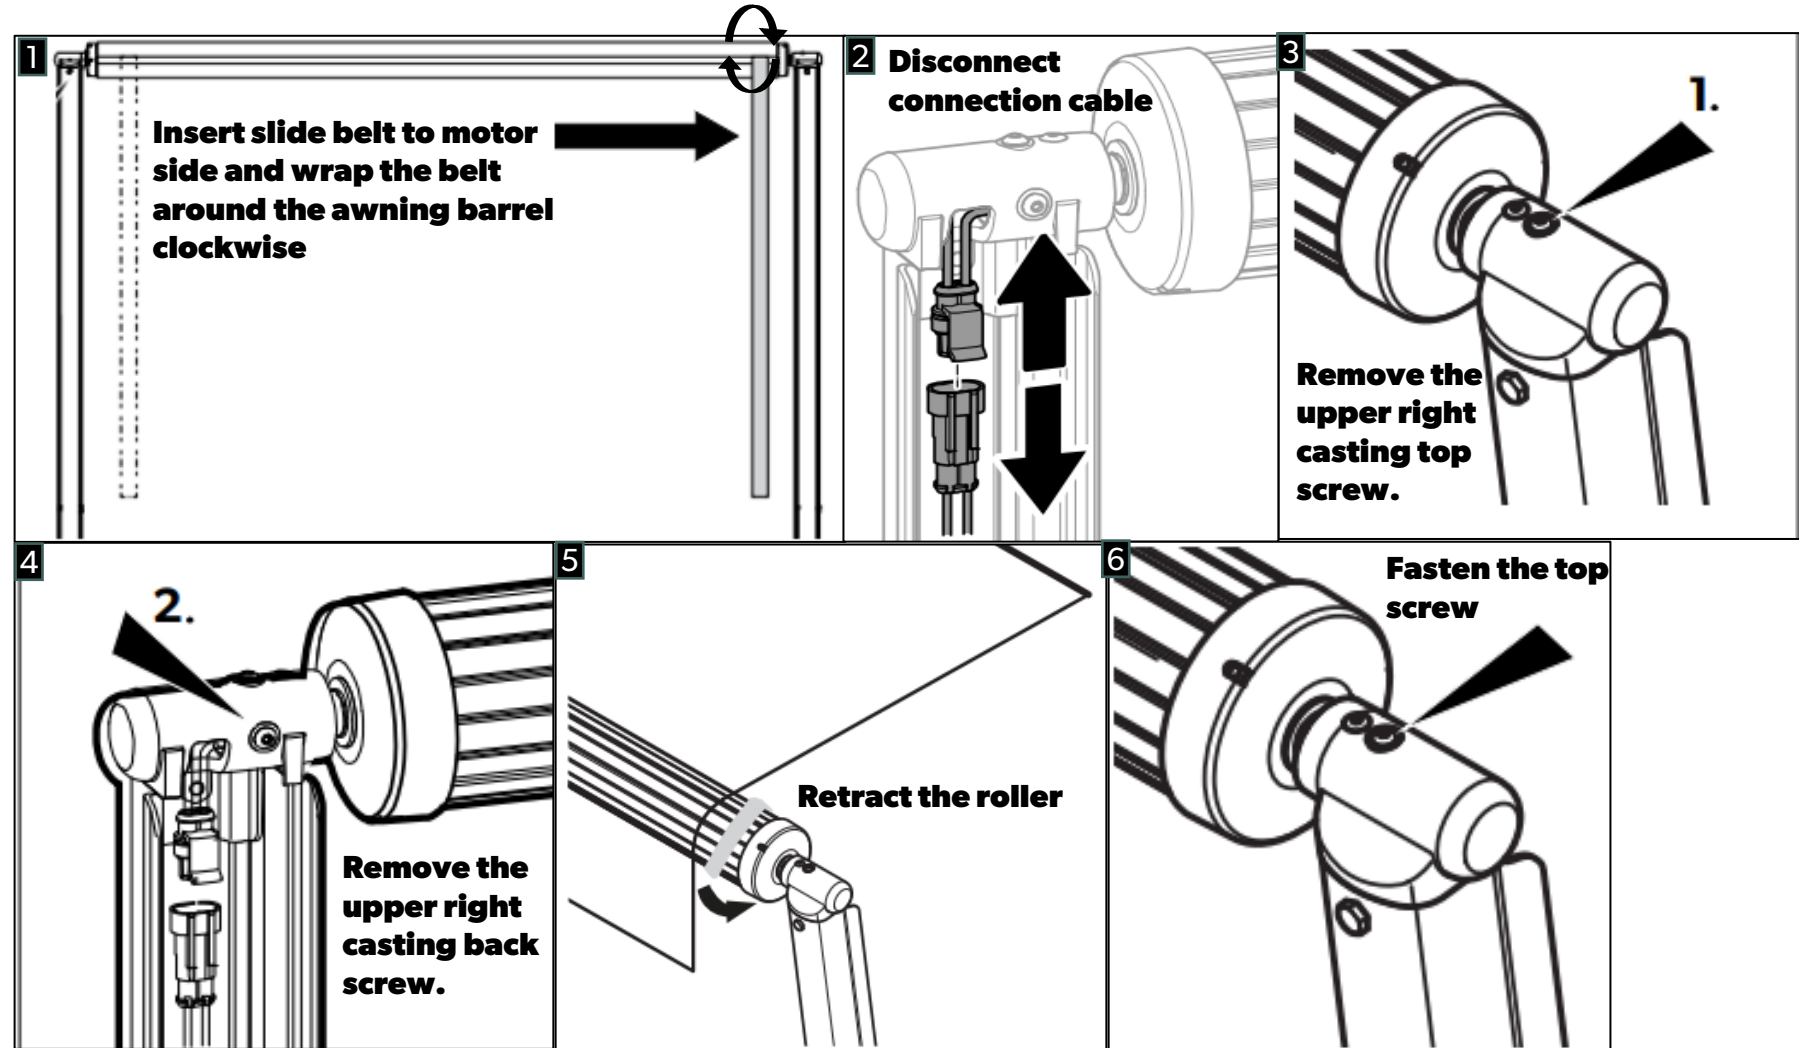

PARTS BREAKDOWN

9700 POWER AWNING

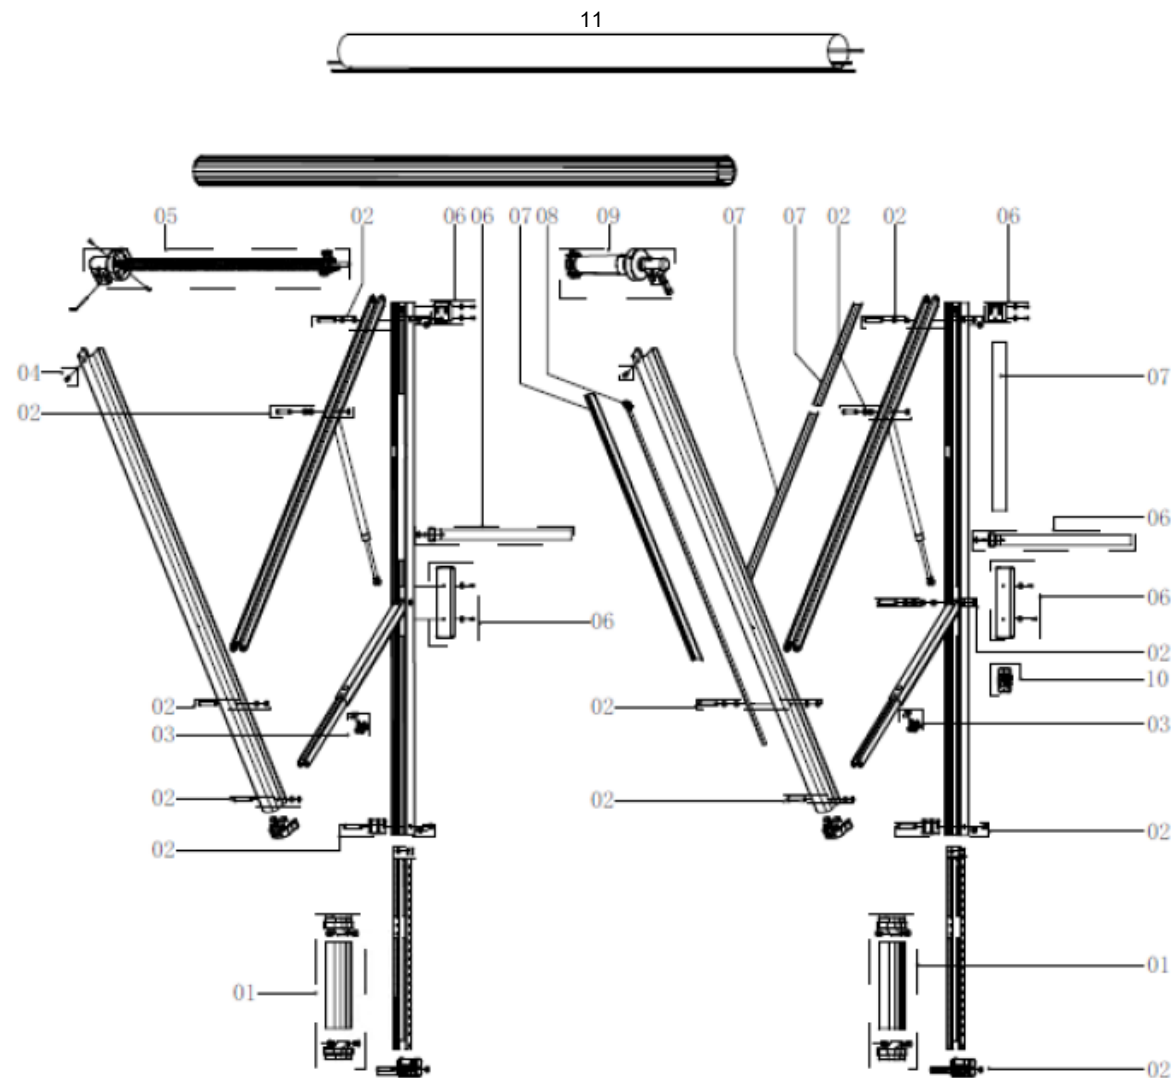

Position	No.	Description
1	9620016962	9700 EXT LEG COVER BK
1	9620013551	9700 EXT LEG COVER WH
2	4472005506	PIN & CLIP SET 9700 AWN
3	4450032650	KNOB & NUT T/S AWN RAFTER
4	4450032652	BOLT & WASHER TORSION 9700 (2)
5	4472005485	TORSION ASSY LH 9700 AWN
6	4472005505	SPACER/STRAP SET 9700 AWN
7	4472005504	COVER WIRING SET 9700 AWN
8		
9	4472005503	MOTOR 9700 AWNING
10	9620013553	9700 ROCKER SWITCH

USER DEMONSTRATION

9700 ELECTRIC AWNING



BAW3000 BOX AWNING

 **DOMETIC**

Now Available

Dometic BAW3000 Box Awning


SKU	Item Description
9630000012	BAW3000 BOX AWNING 2.6M BLACK
9630000013	BAW3000 BOX AWNING 2.6M WHITE
9630000014	BAW3000 BOX AWNING 3M BLACK
9630000015	BAW3000 BOX AWNING 3M WHITE
9630000016	BAW3000 BOX AWNING 3.5M BLACK
9630000017	BAW3000 BOX AWNING 3.5M WHITE
9630000018	BAW3000 BOX AWNING 4M BLACK
9630000019	BAW3000 BOX AWNING 4M WHITE



BOX AWNING BAW3000

SPECIFICATIONS

MODEL NUMBER	BAW3000xx2.6	BAW3000xx3	BAW3000xx3.5	BAW3000xx4
OPERATION TYPE	Manual	Manual	Manual	Manual
SKU NUMBERS	9630000012	9630000014	9630000016	9630000018
	9630000013	9630000015	9630000017	9630000019
COLOURS	Black White	Black White	Black White	Black White
CLOSED WIDTH (mm)	2600	3000	3500	4000
CLOSED HEIGHT (mm)	144	144	144	144
CLOSED DEPTH (mm)	88	88	88	88
OPEN HEIGHT DIFFERENTIAL (mm)	510	510	510	510
OPEN PROJECTION (mm)	1850	2352	2352	2352
OPEN FABRIC WIDTH (mm)	2350	2850	3350	3850
PRODUCT WEIGHT (kg)	20.3	23.6	26.8	30.0
CRANK LENGTH (mm)	850 – 1215	1325– 1875	1325 - 1875	1325 - 1875
160mm MOUNTING BRACKET		2	2	2
80mm MOUNTING BRACKET	3	1	1	2
STRAIGHT ROOF RAFTER				1
SRR MOUNT BRACKET				2
CRANK MOUNT BRACKET	2	2	2	2
RIVETS	4	4	4	4
PEGS	4	4	4	4

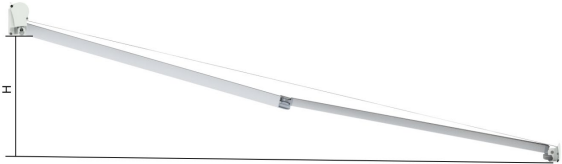

OPEN HEIGHT DIFFERENTIAL



OPEN PROJECTION



OPEN FABRIC WIDTH



BAW3000 BOX AWNING SERIES

Recreational Vehicle Types

Caravans



Class A Motorhomes




Class C Motorhomes



Fifth Wheelers



Lightweight Trailers

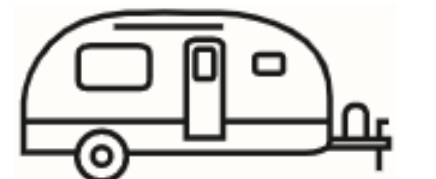

↗ DOMETIC

BAW3000 BOX AWNING

PRODUCT BENEFITS

Effortless Setup

Simple, single-person manual operation every time.



European Gear Box - Heavy-duty torsion springs and solid metal shaft deliver smooth, long-term reliability



Premium Shade - Modern vinyl fabric with UV protection. Engineered to perform in all conditions.




Easy Upgrade - Same footprint as PerfectWall PW1500



BAW3000 VS PW1500


Key Differences

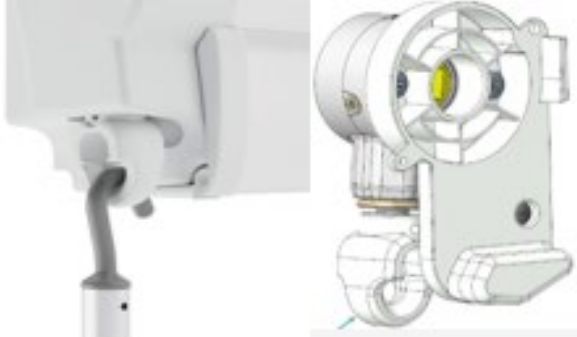	Gear Box	Crank Handle	Support Leg	Lead rail
PW	Internal Gear Box Connector 	T - Hook 	Hinge Pin With Slide Lock 	5 Part Connection 
BAW	External Gear Box Connector 	J - Hook 	Updated Hinge With Screw Lock 	Single Part Connection 


COMPETITION REPLACEMENT

The Thule box awning can be easily replaced with the BAW3000, Dometic has not tested the compatibility or performance of the BAW3000 as a replacement for other awning brands.

Thule Mounting Bracket

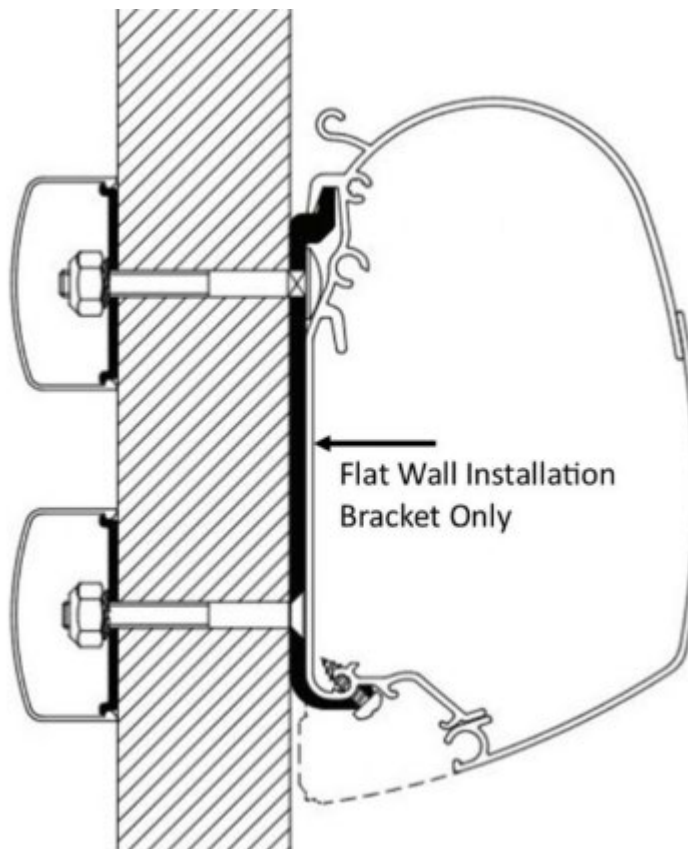


Dometic Mounting bracket

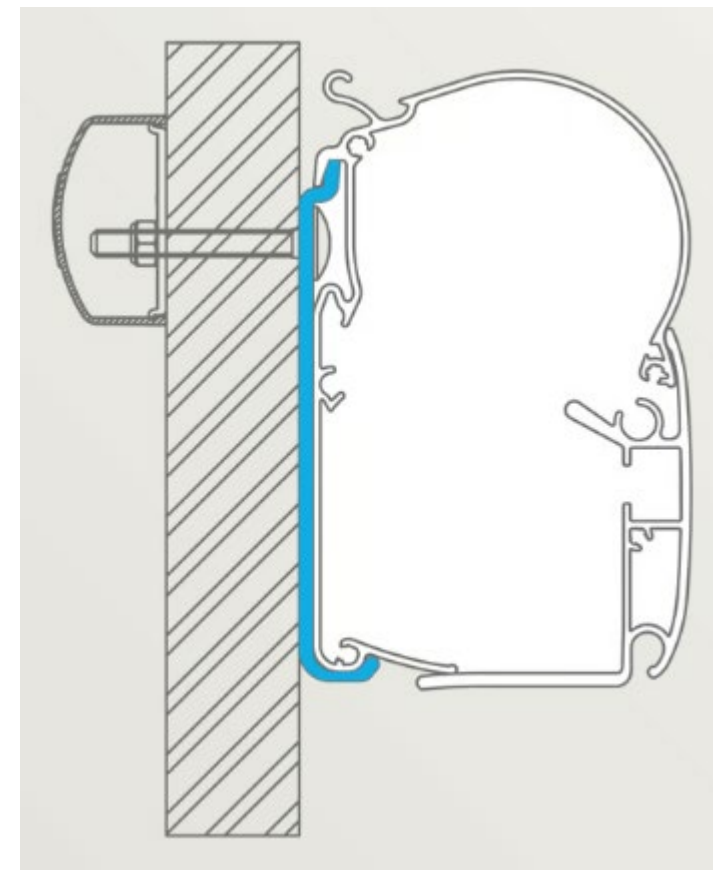


AWNING DEPLOYMENT

To prevent damage to the awning, do not extend awning past the "MAX OPEN SIZE" sticker and always secure the support legs immediately after deploying it.


Hook the crank into the crank socket.

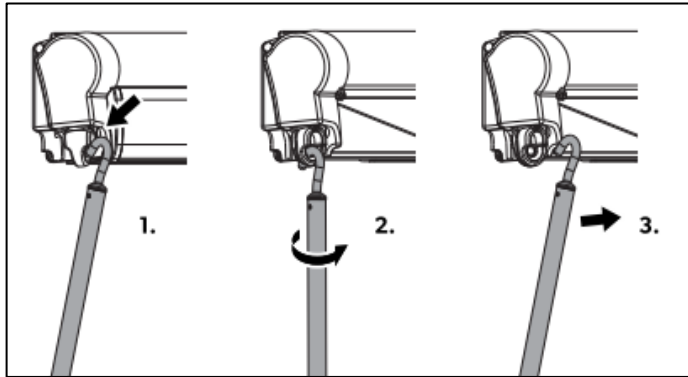


Crank the awning until you see "MAX Open SIZE" sticker

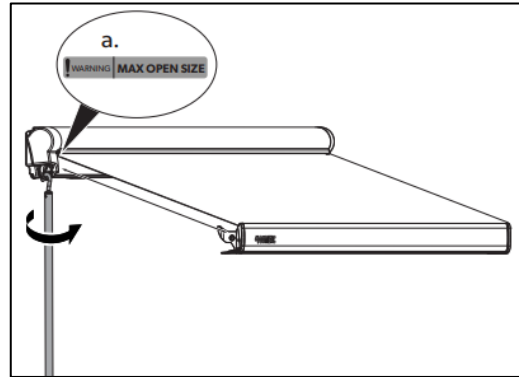

Pull the supporting leg hinge away from the awning rail and fold the supporting leg down.

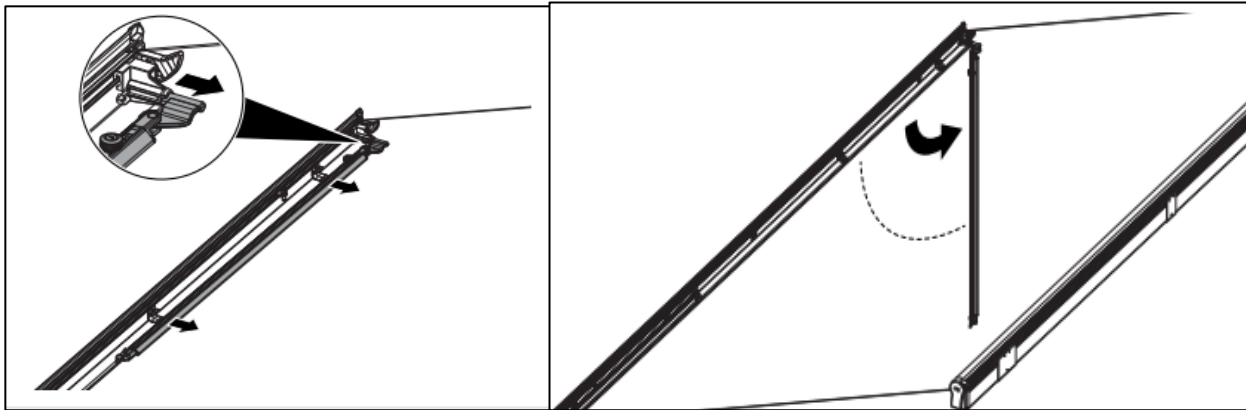


Loosen the knob to adjust height of support legs.

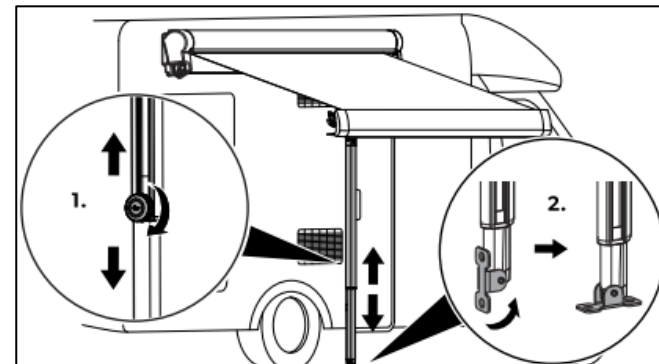

PARTS BREAKDOWN

BAW3000

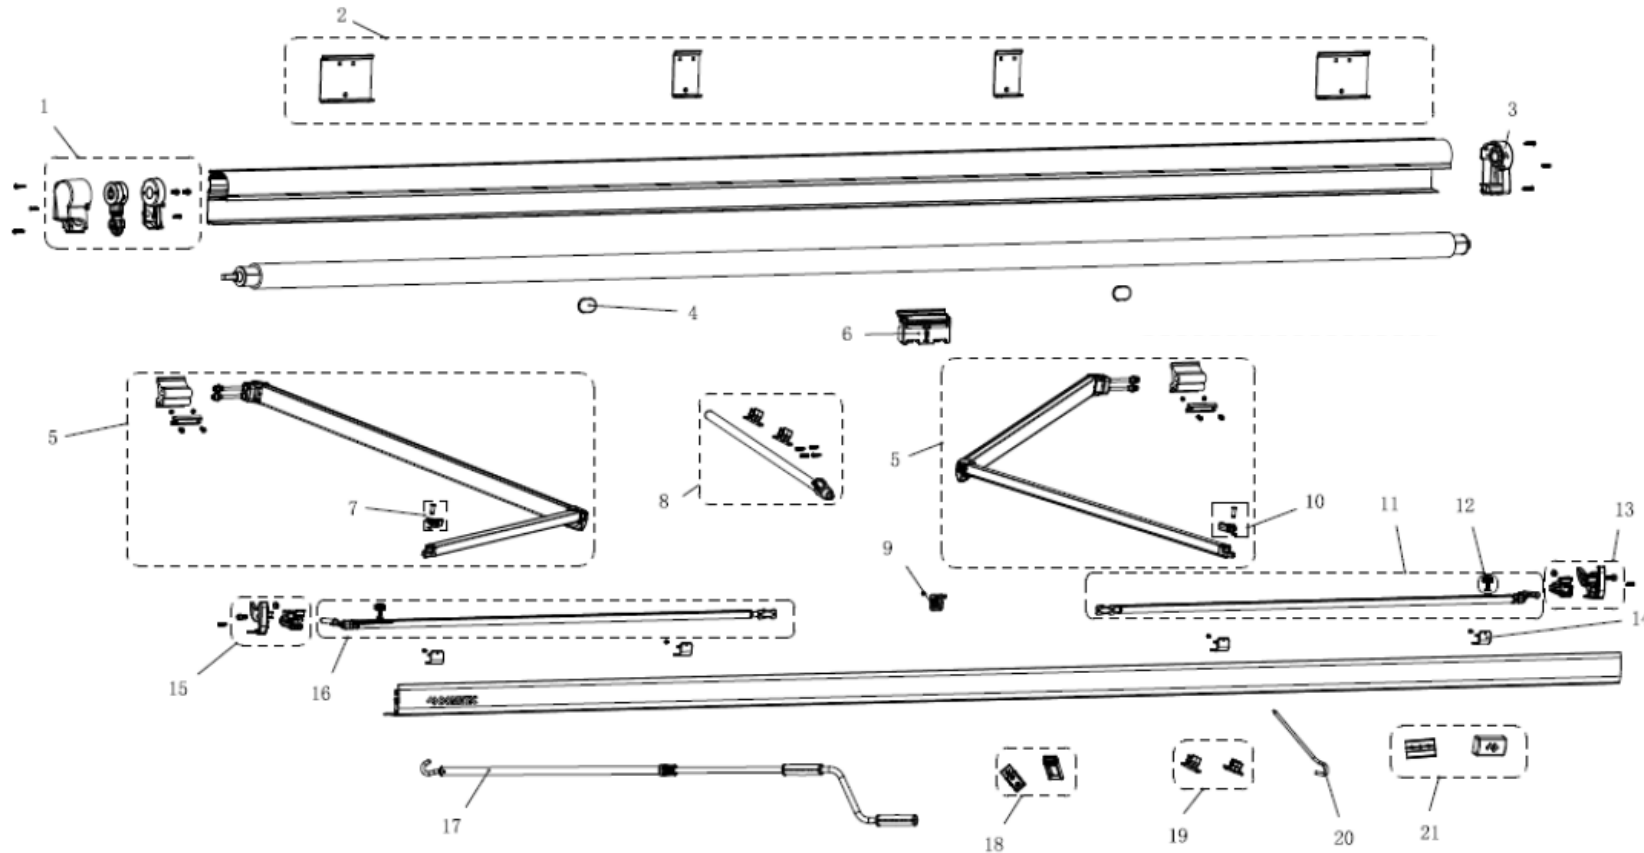

Position	No.	Description
1	4472005475	ENDCAP LH & G/BOX BAW3000 BLK
1	4472005476	ENDCAP LH & G/BOX BAW3000 WHT
2	4472005455	BRACKET MOUNT SET EXT BAW3000
3	4472005477	ENDCAP RH BAW3000 BLK
3	4472005478	ENDCAP RH BAW3000 WHT
5	4472005458	ARM ASSEMBLY BAW3000 2.6M
5	4472005460	ARM ASSEMBLY BAW3000 3.5/4M
6	4472005479	BRACKET MAIN SRR BAW3000 4.0M
7	4472005461	BRACKET ARM LH BAW3000
8	4472005463	RAFTER CENTRE BAW3000 4.0M
9	4472003104	BRACKET SUPP SRR BAW3000 4.0M
10	4472005462	BRACKET ARM RH BAW3000
11	4472005466	LEG ASSEMBY RH BAW3000 2.6M
11	4472005467	LEG ASSEMBY RH BAW3000 3.5/4M
12	4472005468	KNOB LEG BAW3000
13	4472005482	ENDCAP LEAD RH BAW3000 BLK
13	4472005483	ENDCAP LEAD RH BAW3000 WHT
14	4472003100	BRACKET SUPPORT LEG BAW3000
15	4472005480	ENDCAP LEAD LH BAW3000 BLK
15	4472005481	ENDCAP LEAD LH BAW3000 WHT
16	4472005464	LEG ASSEMBY LH BAW3000 2.6M
16	4472005465	LEG ASSEMBY LH BAW3000 3.5/4M
17	4472005470	HANDLE CRANK BAW3000
18	4472005471	BRACKET WALL LEG BAW3000
19	4472005472	HOLDER CRANK HDLE SET BAW3000
21	4472005474	BRACKET MOUNT INT BAW3000

USER DEMONSTRATION

BAW3000



USER DEMONSTRATION

BAW3000 ELECTRIC AWNING





**8800 AWNING
COMING SOON**

NEW 8800 AWNING FABRIC

SAME PROTECTION. GREATER DURABILITY

**STRONGER
FABRIC**



**NEW THERMAL
SEALED EDGE**

**SIGNIFICANTLY
MORE TEAR
RESISTANT**

FABRIC COMPARISON FOR 8700 → 8800

TECHNICAL SPECIFICATIONS

CURRENT 8700 FABRIC

- Width: 2750mm
- Substrate: Woven 100% POLYESTER
9 X 9 / **500D X 500D**
- Configuration: 3- layer fabric
PVC / Substrate / PVC
- Tear strength: **90N (MD) / 67N (TD)**
- UV resistance test: >500H
- Anti-fungus: level 0
- Flammability: meet NFPA 701-15F,
method 2



FUTURE 8800 FABRIC

- Width: 2750mm
- Substrate: Woven 100% POLYESTER
9 X 9 / **1000D X 1000D**
- Configuration: 3- layer fabric
PVC / Substrate / PVC
- Tear strength: **170N (MD) / 185N (TD)**
- UV resistance test: > 500H
- Anti-fungus: level 0
- Flammability: meet NFPA 701-15F,
method 2




8800 AWNING FABRIC EDGE



NEW AND IMPROVED
THERMAL-SEALED
EDGES



8800 HARDWARE - BLACK

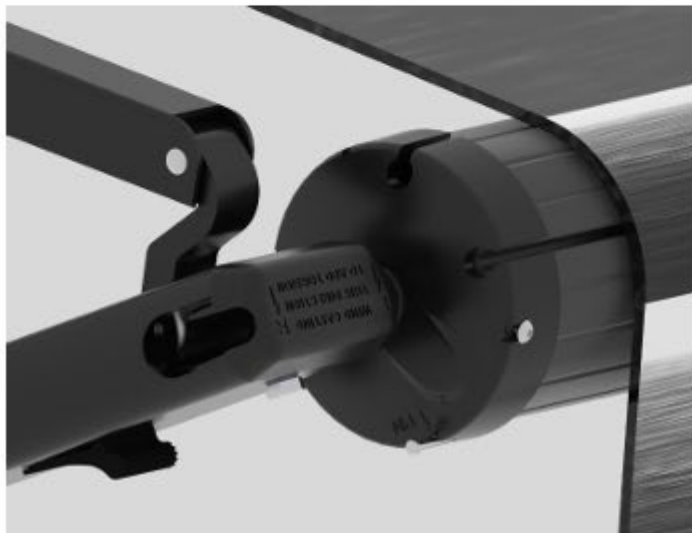

**DARK, MODERN
AESTHETIC**

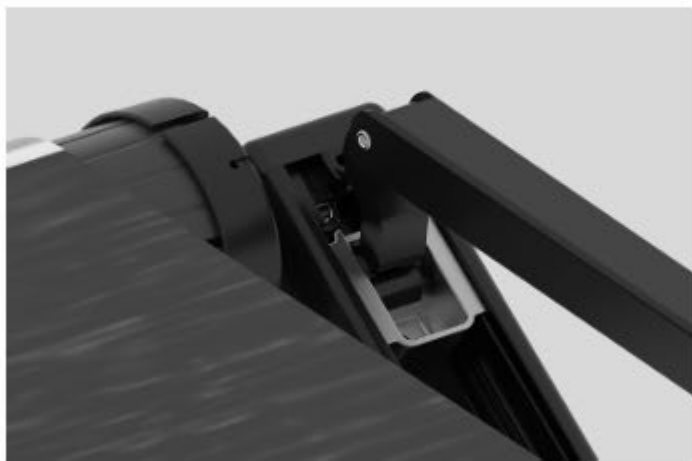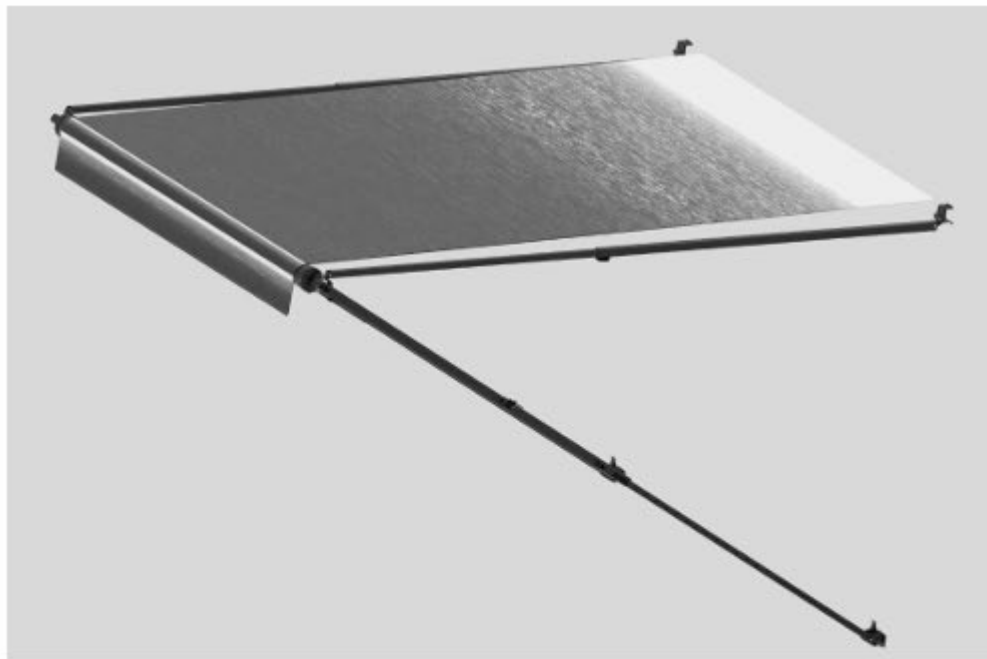

DOMETIC

All images are renders, colours may vary slightly

8800 HARDWARE - WHITE



**ALIGNS TO THE
PATIO AWNING
STYLE GUIDE**



DOMETIC

All images are renders, colours may vary slightly

8800 SERIES - BLACK

10' TO 20' LENGTH



ITEM NO.	SKU NO.	AVAILABILITY	DESCRIPTION
	TBA	MTS	8800 AWNING 10' CHARCOAL BLACK
	TBA	MTS	8800 AWNING 11' CHARCOAL BLACK
	TBA	MTS	8800 AWNING 12' CHARCOAL BLACK
	TBA	MTS	8800 AWNING 13' CHARCOAL BLACK
	TBA	MTS	8800 AWNING 14' CHARCOAL BLACK
	TBA	MTS	8800 AWNING 15' CHARCOAL BLACK
	TBA	MTS	8800 AWNING 16' CHARCOAL BLACK
	TBA	MTS	8800 AWNING 17' CHARCOAL BLACK
	TBA	MTS	8800 AWNING 18' CHARCOAL BLACK
	TBA	MTS	8800 AWNING 19' CHARCOAL BLACK
	TBA	MTS	8800 AWNING 20' CHARCOAL BLACK

DETAILS:

- Heavy-duty vinyl with UV protection
- Total operator control where one person can easily open or close the awning
- Secure cam system allows for controlled extension and roll up of the awning
- Extruded alloy one-piece heavy-duty roller tube
- Die cast end caps create a polished finish
- Heavy-duty torsion spring assemblies and solid metal shaft
- Full extension length of 2.3 m

8800 SERIES - WHITE

10' TO 20' LENGTH




DETAILS:

- Heavy-duty vinyl with UV protection
- Total operator control where one person can easily open or close the awning
- Secure cam system allows for controlled extension and roll up of the awning
- Extruded alloy one-piece heavy-duty roller tube
- Die cast end caps create a polished finish
- Heavy-duty torsion spring assemblies and solid metal shaft
- Full extension length of 2.3 m

ITEM NO.	SKU NO.	AVAILABILITY	DESCRIPTION
	TBA	MTS	8800 AWNING 10' POLAR WHITE
	TBA	MTS	8800 AWNING 11' POLAR WHITE
	TBA	MTS	8800 AWNING 12' POLAR WHITE
	TBA	MTS	8800 AWNING 13' POLAR WHITE
	TBA	MTS	8800 AWNING 14' POLAR WHITE
	TBA	MTS	8800 AWNING 15' POLAR WHITE
	TBA	MTS	8800 AWNING 16' POLAR WHITE
	TBA	MTS	8800 AWNING 17' POLAR WHITE
	TBA	MTS	8800 AWNING 18' POLAR WHITE
	TBA	MTS	8800 AWNING 19' POLAR WHITE
	TBA	MTS	8800 AWNING 20' POLAR WHITE

8800 SERIES AWNING HARDWARE

BLACK & WHITE

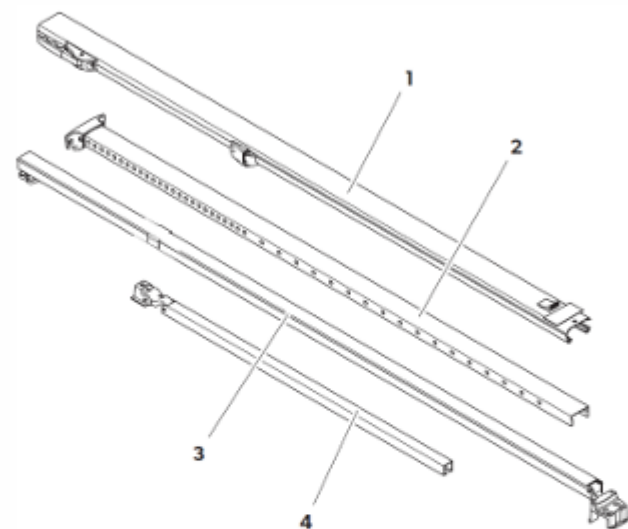

Hardware	888HT-BK 888HT-WH (Tall - Black White)	888HS-BK 888HS-WH (Standard - Black White)	888HU-BK 888HU-WH (Ultra-short - Black White)	878HU-BK-B (Ultra-short Jayco - Black)
Height range	1925 mm – 2235 mm	1620 mm – 1930 mm	1475mm - 1676mm	1475mm - 1676mm
Main arm length (1)	1855 mm	1550 mm	1385mm	1385mm
Adjustable arm length (2)	1455 mm	1455 mm	1288mm	1284mm
Main rafter length (3)	1678 mm	1372 mm	1245mm	1170mm
Secondary rafter length (4)	826 mm	1130 mm	1130mm	1130mm

DETAILS:



Dometic Awning Hardware is purpose-built for performance in the harshest Australian conditions. The robust design of Dometic Awning Hardware features a heavy-duty, powder coated aluminium construction and cast aluminium safety latches. Thanks to its soft grip handles and five-star locking knobs, Dometic 8800 Awning Hardware is simple to use.

ITEM NO.	SKU NO.	DESCRIPTION
888HS-BK	TBA	HDW STD BLACK
888HS-WH	TBA	HDW STD WHITE
888HT-BK	TBA	HDW TALL BLACK
888HT-WH	TBA	HDW TALL WHITE
888HU-BK	TBA	HDW ULTRA SHORT BLACK
888HU-WH	TBA	HDW ULTRA SHORT WHITE
878HU-BK-B	9630002312	HDW ULTRA SHORT BLACK JAYCO

8800 MANUAL PATIO SERIES - AWNINGS

TAREGT TECHNICAL SPECIFICATIONS


MODEL NUMBER	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC	TBC
OPERATION TYPE	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual
SKU NUMBERS											
COLOURS	Polar White Charcoal Black	Polar White Charcoal Black	Polar White Charcoal Black	Polar White Charcoal Black	Polar White Charcoal Black	Polar White Charcoal Black	Polar White Charcoal Black	Polar White Charcoal Black	Polar White Charcoal Black	Polar White Charcoal Black	Polar White Charcoal Black
AWNING WIDTH (ft)	10'	11'	12'	13'	14'	15'	16'	17'	18'	19'	20'
AWNING WIDTH (mm)	3048	3353	3658	3962	4267	4572	4877	5182	5486	5791	6096
CLOSED PRODUCT DEPTH (mm)	102	102	102	102	102	102	102	102	102	102	102
OPEN PROJECTION (mm)	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300
PRODUCT WEIGHT (kg)											

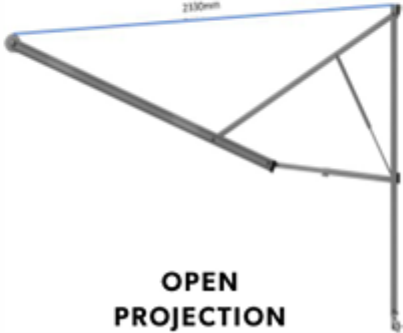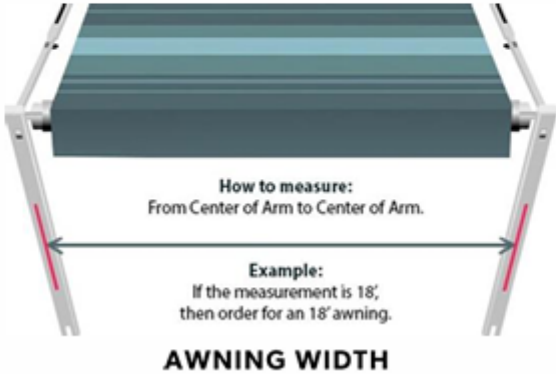

8800 UNIVERSAL HARDWARE SERIES

TARGET TECHNICAL SPECIFICATIONS

MODEL NUMBER	TBC	TBC	TBC	878HU-BK-B (Jayco)
OPERATION TYPE	Manual	Manual	Manual	Manual
SKU NUMBERS	TBC	TBC	TBC	9630002312
COLOURS	Black White	Black White	Black White	Black
MINIMUM WALL HEIGHT (mm)	1925	1620	1475	1475
MAXIMUM WALL HEIGHT (mm)	2235	1930	1676	1676
CLOSED DEPTH (mm)	80	80	80	80
CLOSED WIDTH (mm)	100	100	100	100
PRODUCT WEIGHT (kg)	11.2	10.4	10	9.5

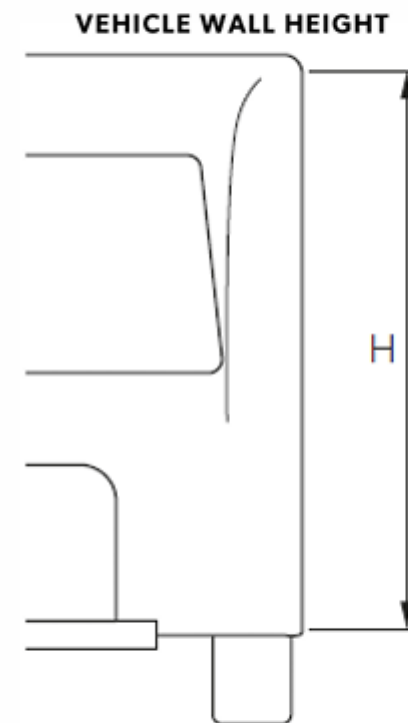

The image features a white Dometic motorhome parked on a grassy field at sunset. A large, dark awning is extended from the side of the motorhome. In the foreground, a surfboard leans against the motorhome. A person stands near the awning, and another person carries a surfboard in the background. The Dometic logo, consisting of a stylized arrow icon and the word "DOMETIC", is overlaid in the center of the image.

↗ DOMETIC