



ISSN 0975-7058

International Journal
of
Applied Pharmaceutics

<http://innovareacademics.in>

Editorial Board

Editor-in-Chief

Dr. Umesh Gupta

Department of Pharmacy, Central University of Rajasthan, Ajmer, Rajasthan, India

Email: editor@ijaponline.org; umeshgupta@curaj.ac.in

Associate Editors

Dr. Genta Ida

Department of Drug Sciences, University of Pavia, Italy

Email: ida.genta@unipv.it

Dr. Gaurav Kant Saraogi

School of Pharmacy and Technology Management, NMIMS University, Shirpur Campus, Maharashtra, India

Email: gauravsaraogi13@gmail.com

Assistant Editors

Dr. Awesh Kumar Yadav

Department of Pharmaceutics, Bhagyodaya Tirth Pharmacy College, Sagar, MP, India

Email: aweshyadav@gmail.com

Dr. Arvind Gulbake

Research & Development, Centre for Interdisciplinary Research, D. Y. Patil University, Kolhapur, Maharashtra, India

Email: arvind.gulbake@gmail.com

Editorial Members

Dr. Kailash C. Petkar

Scientist 'C', Government of India, DSIR, Min. of Science and Technology, New Delhi, India

Dr. Tarang Nema

Waters Pacific Pte Ltd, Singapore

Dr. Carlotta Marianecchi

Dipartimento di Chimica e Tecnologie del Farmaco, Sapienza Università di Roma, Rome, Italy

Dr. Manoj Nahar

Sun Pharmaceutical Industries Limited, Vadodara, Gujarat, India

Dr. Tarek Abdelnaby Ahmed

Department of Pharmaceutics and Industrial Pharmacy, Faculty of Pharmacy, KAU, Jeddah, KSA

Dr. Elizabeth Igne Ferreira

Faculty of Pharmaceutical Sciences, University of Sao Paulo, Brazil

Dr. Surya Prakasarao Kovvasu

Western University of Health Sciences, Pomona, California, USA

Dr. N. Kanagathara

Saveetha School of Engineering, Saveetha University, Chennai, India

Dr. Mohammed Elmowafy Gomaa Aburaia

Department of Pharmaceutics, College of Pharmacy, Jouf University, Saudi Arabia

Dr. Liang Chen

Wenzhou Medical University, Wenzhou, P. R. China

Dr. Franca Castiglione
Department "G. Natta", Politecnico di Milano, Italy

Dr. Iman Emam Omar Gomaa
Faculty of Pharmacy, University for Modern Sciences and Arts (MSA)" Cairo - Egypt

Dr. Basant Amarji
UIPS, Punjab University, Chandigarh, Punjab, India

Dr. Rabab Kamel
Pharmaceutical Technology Department, National Research Centre, Egypt

Dr. Satish Shilpi
Ravishankar College of Pharmacy, Bhopal, MP, India

Dr. Umeyor Chukwuebuka Emmanuel
Faculty of Pharmaceutical Sciences, Nnamdi Azikiwe University, Awka, Anambra State, Nigeria

Dr. Yosra S.R. Elnaggar,
Faculty of Pharmacy and Drug Manufacturing, Pharos University, Alexandria, Egypt

Dr. Sumeet Kapoor
IIT New Delhi, India

Mr. Khent Alcantara
Chulalongkorn Univeristy, Bangkok, Thailand

Table of Content

Vol 13, Special Issue 3 (Mar), 2021

Review Article(s)

SYSTEMATIC REVIEW: THE ENHANCEMENT OF ANTI-INFLAMMATION
ACTIVITY OF NON STEROIDAL ANTI-INFLAMMATORY DRUG (NSAID) BY
SOLID DISPERSION MODIFICATIONS

DHEA A. RAMADHANI, ADI YUGATAMA, DIAN E. ERMAWATI

Pages 1-6

Original Article(s)

TURMERIC EXTRACT POTENTIAL INHIBIT INFLAMMATORY MARKER IN LPS-
STIMULATED MACROPHAGE CELLS

WAHYU WIDOWATI, DIANA KRISANTI JASAPUTRA, KAMILA YASHFA
GUNAWAN, HANNA SARI WIDYA KUSUMA, SEILA ARUMWARDANA, CINTANI
DEWI WAHYUNI, I. NYOMAN EHRICH LISTER, CHRISMIS NOVALINDA
GINTING, ERMI GIRSANG, RIZAL RIZAL

Pages 7-11

HISTOCHEMICAL INVESTIGATION ON ARCHIDENDRON BUBALINUM (JACK
NIELSEN.) FROM LAMPUNG, SUMATERA, INDONESIA

HESTI RIASARI, RIKA HARTATI, KUSNANDAR ANGGADIREDA, SUKRASNO

Pages 12-16

FORMULATION, CHARACTERIZATION AND STABILITY STUDY OF FAST
DISSOLVING THIN FILM CONTAINING ASTAXANTHIN NANOEMULSION
USING HYDROXYPROPYLMETHYL CELLULOSE POLYMER

LUSI NURDIANTI, IYAN SOPYAN, TAOFIK RUSDIANA

Pages 17-22

IMPLEMENTATION OF FUZZY LOGIC CONTROLLERS TO MAINTAIN WATER
TEMPERATURE IN HYDROPONICS NFT FOR LOLLO VERDE LETTUCE
(LACTUCA SATIVA L.)

MOHAMAD NURKAMAL FAUZAN, NYI MEKAR SAPTARINI

Pages 23-27

COST-EFFECTIVENESS ANALYSIS OF PROLANIS OF TYPE 2 DIABETES
MELLITUS PATIENTS ON THREE COMMUNITY HEALTH CENTERS IN
BANDUNG, INDONESIA

RIANI TANJUNG, YULIA WARDATI, NYI MEKAR SAPTARINI

Pages 28-31

MOLECULAR DYNAMIC SIMULATION OF ASIATIC ACID DERIVATIVES
COMPLEX WITH INDUCIBLE NITRIC OXIDE SYNTHASE ENZYME AS AN ANTI-
INFLAMMATORY

IDA MUSFIROH, HANIFAHZIN KHATAMI, SANDRA MEGANTARA,
MUCHTARIDI MUCHTARIDI

Pages 32-38

EFFECT OF FLAVONOIDS ON OXIDATIVE STRESS, APOPTOSIS, AND CELL
MARKERS OF PERIPHERAL BLOOD-DERIVED ENDOTHELIAL PROGENITOR
CELLS: AN IN VITRO STUDY

WAHYU WIDOWATI, RIMONTA F. GUNANEGARA, TERESA LILIANA
WARGASETIA, HANNA SARI WIDYA KUSUMA, SEILA ARUMWARDANA,
CINTANI DEWI WAHYUNI, ERMI GIRSANG, I NYOMAN EHRICH LISTER,
CHRISMIS NOVALINDA GINTING, RIZAL RIZAL, INDRA BACHTIAR, HARRY

MURTI, YOUNG HO KIM
Pages 39-42

DEVELOPMENT AND CHARACTERIZATION OF PRECIROL ATO 88 BASE IN
NANOSTRUCTURED LIPID CARRIERS (NLC) FORMULATION WITH THE
PROBE SONICATION METHOD
GARNADI JAFAR, MARLINE ABDASSAH, TAOFIK RUSDIANA, RIZKI
KHAIRUNISA
Pages 43-46

IMPROVING SOLUBILITY AND DISSOLUTION OF A NATURAL PRODUCT
APIGENIN VIA PREPARATION OF SOLID DISPERSION BY HOT MELT
EXTRUSION
SOFI N. STIANI, TAOFIK RUSDIANA, ANAS SUBARNAS
Pages 47-52

NEPHROPROTECTIVE ACTIVITY OF ETHANOL EXTRACT OF KIRINYUH
(CHROMOLAENA ODORATA L) IN GENTAMICIN INDUCED NEPHROTOXICITY
IN WISTAR RATS
KENI IDACAHYATI, LUSI NURDIANTI, SILVI SIPTANUL HUSNI, FIRMAN
GUSTAMAN, WINDA TRISNA WULANDARI
Pages 53-56

COMPARISON OF ANTIHYPERGLYCEMIC ACTIVITY OF DIFFERENT PARTS OF
KLUTUK BANANA (MUSA BALBISIANA COLLA)
TITA NOFIANTI, AHMAD MUHTADI, IRDA FIDRIANNY
Pages 57-61

OPTIMIZATION OF LACTOBACILLUS PLANTARUM ACTIVITIES IN THE
BIOSYNTHESIS OF LIPASE ENZYMES
RIRIN PUSPADEWI, PUTRANTI ADIRESTUTI, MIRA A. DEWI, INNANI
MUKARROMAH, YUNIAR RAHMADINNI
Pages 62-65

PHYSICAL PROPERTIES AND RATE OF DIFFUSION TRANSETHOSOME
CURCUMIN USING A COMBINATION OF TWEEN 60 AND SPAN 60 AS
SURFACTANT
ANISA AMALIA, YUDI SRIFIANA, AMALIA ANWAR
Pages 66-70

PREPARATION AND CHARACTERIZATION OF ENTERIC-COATED DELAYED-
RELEASE MICROSPHERE OF PHYTOSOME LOADING ALLICIN-RICH EXTRACT
NINING NINING, YUDI SRIFIANA, ELY MALINDA FADLIANTY
Pages 71-75

ANTIPYRETIC ACTIVITY OF CENTELLA (CENTELLA ASIATICA (L.) URBAN)
HERB IN VACCINE INDUCED MICE
NYI MEKAR SAPTARINI, ENDAH KARTIKAWATI
Pages 76-78

IMPLEMENTATION OF FUZZY LOGIC CONTROLLERS TO MAINTAIN WATER TEMPERATURE IN HYDROPONICS NFT FOR LOLLO VERDE LETTUCE (*LACTUCA SATIVA* L.)

MOHAMAD NURKAMAL FAUZAN¹, NYI MEKAR SAPTARINI^{2*}

¹Applied Bachelor Program of Informatics Engineering, Pos Indonesia Polytechnic, West Java 40151, ²Department of Pharmaceutical Analysis and Medicinal Chemistry, Faculty of Pharmacy, Universitas Padjadjaran, West Java 45363
Email: nyi.mekar@unpad.ac.id

Received: 27 Aug 2020, Revised and Accepted: 06 Oct 2020

ABSTRACT

Objective: The purpose of this study was to maintain the nutritional water temperature in the range of 25-27 °C for Lollo Verde lettuce (*Lactuca sativa* L.).

Methods: The method was the Fuzzy Logic Mamdani (FLM) with two inputs, i.e. real time clock and temperature. The output was crisp speed PWM with the center of area method.

Results: The results showed that Fuzzy logic was succeeded in reducing water temperature in the NFT system from 28-32 °C to 26-27 °C, with an average delta of 3.5 °C. Fuzzy logic maintained the nutrient water temperature in the Lollo Verde lettuce with an average of 26.57±0.5 °C. Water temperature affected the yield of Lollo Verde lettuce.

Conclusion: The yield of NFT FLM system was better compared to the conventional NFT system.

Keywords: Nutrient film technique, Temperature maintenance, Fuzzy logic mamdani

© 2021 The Authors. Published by Innovare Academic Sciences Pvt Ltd. This is an open access article under the CC BY license (<https://creativecommons.org/licenses/by/4.0/>) DOI: <https://dx.doi.org/10.22159/ijap.2021.v13s3.04> Journal homepage: <https://innovareacademics.in/journals/index.php/ijap>

INTRODUCTION

Hydroponics is an effective way to preserve water and planting space [1]. Hydroponic culture with the application of nutritional media, has become the second generation of the fastest growing crop production system and agricultural industry [2]. Planting vegetables hydroponic methods lead to economic value. Moreover, the market has begun to grow in accordance with the growing demand [3]. There are several hydroponic systems, including Nutrient Film Technique (NFT) [4]. There are several factors that affect the growth of hydroponic plants, including nutrient levels, acidity and water temperature in the system [5].

Water temperature affects the physiological processes during plant growth and development [6]. Hydroponic growth requires an ideal temperature system container, because the increased oxygen demand is proportional to plant growth [7-9]. An increased temperature around the plant roots will decrease dissolved oxygen levels in water. This causes the increased the pathogen growth, such as *Pythium sp.* [10-12] The ideal temperature of the nutrient solution is in the range of 18.3-26.6 °C [13] and for tropical plants in the range of 25-30 °C [14, 15].

Bandung, Indonesia, has two seasons, i.e. tropical heat/rain climate. The air temperature is 23.7±0.5 °C, with the lowest temperature is 17.9 °C and the highest is 32.4 °C [16]. The temperature in our hydroponic system ranges from 28 to 32 °C. In this study, the water temperature was cooled by utilizing the air environment

temperature [17, 18]. The purpose of this study was to maintain the nutritional water temperature in the range of 25-27 °C for Lollo Verde lettuce (*Lactuca sativa* L.) [19].

MATERIALS AND METHODS

Materials

This study was conducted in Sariasih, Bandung, West Java, Indonesia. The study used Lollo Verde lettuce as a plant sample, rockwool, reservoirs, pipes, fans, and Arduino.

Methods

Hydroponic system design

Hydroponic system was modified design which described by Fauzan and Saptarini [20]. Reservoir or container of 20 L for 30 Lollo Verde lettuce filled with 15 L of water (75%). The NFT hydroponic system (fig. 1a) consists of 3 pipes filled with 10 pots that have input-fan and exhaust pipe with exhaust-fan of water flow. The volume of nutrient water per pipe (2.5 inch) with a length of 2 m was filled with 30%, i.e. 2.1 L. Three fans (12v, 0.15A) were parallel arranged to cool the nutrient water temperature with an environment air temperature of 23.7±0.5 °C. Arduino UNO r3 microcontroller (fig. 1b) control fan speed via PWM [21] with input set of DS3231 real time clock (RTC) at 0-23 and DS18B20 waterproof temperature sensor to read temperature values in Celsius units.

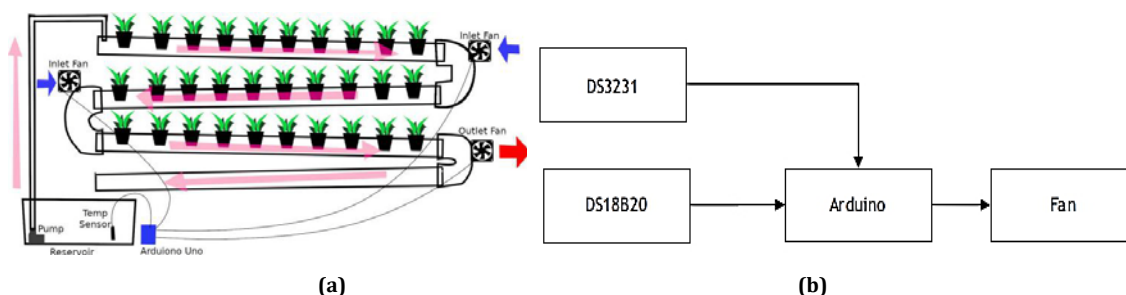


Fig. 1: NFT system design (a) and arduino UNO r3 block (b)

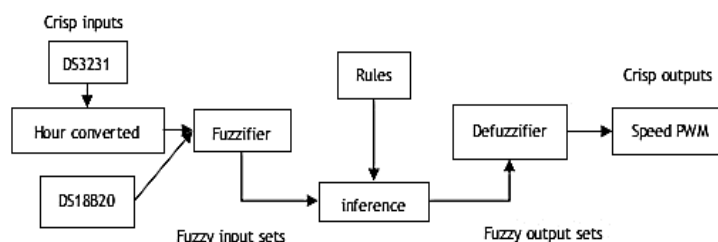


Fig. 2: Fuzzy logic controller

Fuzzy Logic Controller (FLC) [22] (fig. 2) was used to read two input parameters, i.e. (a) RTC input to convert hours 0-23 to 3-26, then entered into the time membership (table 1) and (b) temperature sensor input, then entered into the temperature membership (table 2). Both inputs produce outputs according to the PWM membership speed (table 3) through rules (table 4). Output in the form of speed PWM crisps value with the Center of Area (COA) method which is calculated by equation 1 [23].

$$z_0 = \frac{\sum_{j=1}^n \mu(w_j) \cdot w_j}{\sum_{j=1}^n \mu(w_j)} \dots (1)$$

The defuzzified value was denoted as z_0 . Here w_j was indicate the sample element, $\mu(w_j)$ was the membership function, and n was representing the number of elements in the sample [23].

Table 1: Time membership

Membership	Time	Time conversion
Time1	21.00-3.00	21-26
Time2	3.01-20.59	3-21

Table 2: Temperature membership

Membership	Temperature (°C)
Cool	0-25
Normal	25-27
Hot	27-50

Table 3: Speed membership

Membership	PWM speed
off	0
mid	100,128,140
max	255

Table 4: Fuzzy logic rules

Membership	Time1 (21-26)	Time2 (3-21)
Cool	Off	Off
normal	Off	Mid
Hot	Mid	Max

Time inputs were made into two memberships to simplify the calculations. The system was applied rules for time, i.e. if the hour value was less than 3, the hour value was added to 24 to produce its conversion (table 1). Temperature inputs were divided into three memberships (table 2). The PWM speed output was 2 singletons and 1 triangular membership (table 3). Fuzzy logic was used the rules in table 4. The weight comparison of Lollo Verde lettuce between conventional NFT and NFT with FLC systems was done at harvest, i.e. 45 d after the seeding.

Statistical analysis

The Python 3.8.2 program was used for data plotting and statistical analysis.

RESULTS AND DISCUSSION

The Lollo Verde lettuce was used in this set-up to be tested with the hydroponic circuit as shown in fig. 1a to maximize the planting space. The Lollo Verde lettuces were planted on the rockwool slave with 3 hills per slave and implementing the NFT system. In this study, the temperature of nutrient water was considered the factors to be maintained. The temperature maintenance can achieve with compressed refrigeration techniques with the lowest temperatures was 5 °C [24]. Controlling vent fans and growlight can achieve an optimal temperature range of 10 to 35 °C [25]. Light and temperature affected the final internode lengths (FIL) [26]. In the Cold Storage System Temperature study, Fuzzy produced crisp outputs which suitable for hot fan speeds and cold fan speeds of 6.55% and 70%, respectively [27]. The considered factor was the temperature, which plants acceptable, i.e. 25-27 °C for Lollo Verde lettuce [19].

In this study, a microcontroller was used to implement a fuzzy logic-based temperature control system. The purpose of the system was to control the water temperature by regulating the speed of a fan (fig. 1b). There were many ways to describe the variables linguistically, we choose the simple linguistic to simplify the task of the controller using fuzzy logic (fig. 2). Plots in fig. 3 and 4 were obtained from the Python program by entering the membership input and output parameters. Membership inputs, outputs, and rules were obtained from field observations (Sariasih, Bandung) and literature studies. The temperature membership plot was described the group of input values which read by the DS18B20 sensor (fig. 3a). The membership time plot was described the group of input values which read by RTC DS3231 (fig. 3b). The membership output plot was a variation of the PWM speed value from the range 0 to 255 (fig. 4).

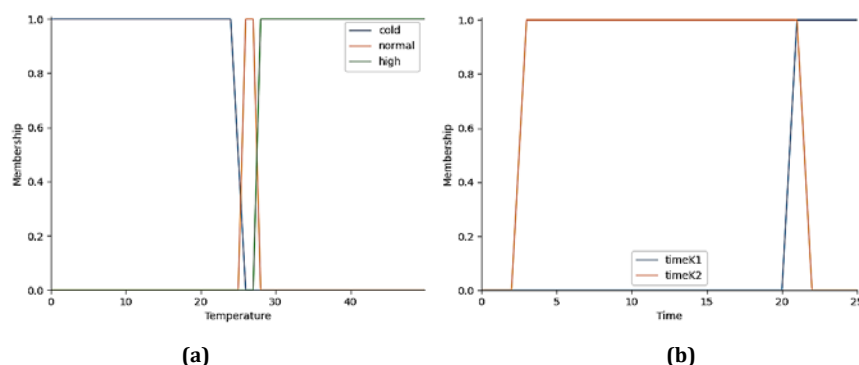


Fig. 3: Input membership of temperature (a) and time (b)

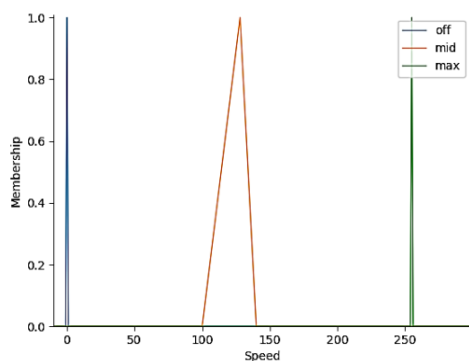


Fig. 4: Speed membership

Fig. 5 was obtained from the data recorded for 6 d and randomly taken at different hours from the morning to the night. This design was shown the exhausted water collide with the sucked air from the exhaust fan (2.29 inch x 2 m) with a cross-sectional area of about 0.116 m² on the surface. The ideal temperature was reached after 6 d the system first runs (fig. 5). After the 6th day, the water temperature showed a stable value, i.e. 26-27 °C.

Fig. 6 was obtained from the data recorded from 00.00 to 23.59 (converted from 0 to 26) to the response of fan speed output on the 7th day. Fig. 7 was obtained from recorded data in the form of reading the value of the nutrient water temperature sensor to the fan speed output response on the 7th day. The data in fig. 6 and 7 were carried out simultaneously, but processed with different parameters. Table 5 showed the weight comparison between the conventional NFT and NFT with FLC systems performed at harvest, which 10 plus 35 d from seeding.

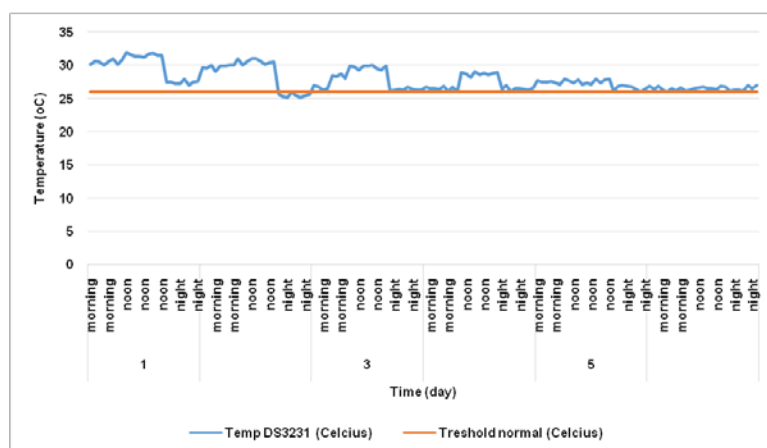


Fig. 5: Graph of time versus temperature

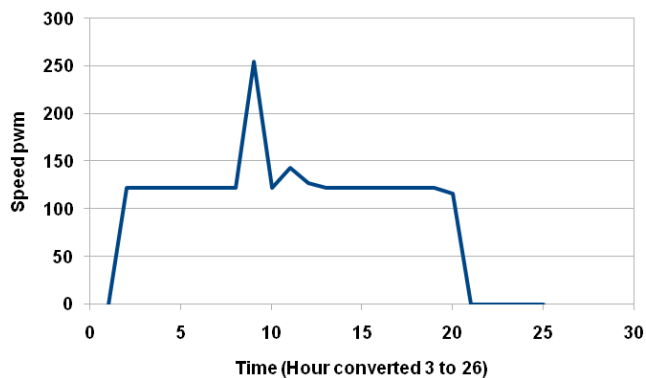


Fig. 6: Graph of time versus speed

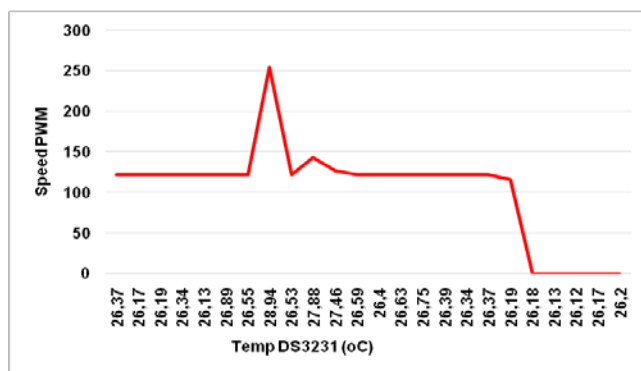


Fig. 7: The temperature sensor reading and PWM Speed response

At night, temperatures were 17.9 ± 0.2 °C, the exhaust fan did not work, due to the water temperature in the system was ideal (fig. 6). This was in accordance with the Fuzzy logic rules, so the speed output was 0 or a deadly condition. The results showed that even though the water temperatures were relatively stable, sometimes the DS18B20 temperature sensor was increased. Example, at 28.94 °C, the response of the fuzzy system produced a maximum output speed of 255 (fig. 7).

The fans were rotated according to the constructed rules (table 4). Fuzzy logic was succeeded in reducing water temperature in the NFT system, from 28-32 °C to 26-27 °C, with an average delta of 3.5 °C. Fuzzy logic was succeeded in maintaining the nutrient water temperature in the Lollo Verde lettuce system, with an average of 26.57 ± 0.5 °C. This temperature was in the recommended temperature range for Lollo Verde lettuce, i.e. 25-27 °C [19].

Table 5: The weight comparison between the conventional NFT and NFT with FLC systems

Pot no.	NFT (g)	NFT+FLC (g)	Pot no.	NFT (g)	NFT+FLC (g)	Pot no.	NFT (g)	NFT+FLC (g)
1	187	193	11	189	199	21	197	193
2	183	192	12	192	199	22	189	193
3	184	198	13	193	196	23	198	188
4	188	185	14	200	184	24	183	195
5	187	200	15	193	196	25	184	182
6	197	184	16	198	189	26	200	183
7	192	198	17	190	193	27	184	199
8	184	198	18	194	182	28	196	184
9	196	201	19	201	198	29	185	200
10	183	200	20	181	185	30	196	189

The weight comparison between the conventional NFT and NFT with FLC systems was performed on Lollo Verde lettuce, 10 d after seeding and transferred to the NFT system. The harvest on the 35th day after planting on the NFT system. The weight of the Lollo Verde lettuce of the conventional NFT and NFT with FLC systems was 190.8 ± 0.4 g and 192.5 ± 0.2 g, respectively (table 5). These results indicate that the NFT with FLC system was 0.9% better than the conventional NFT system. The inlet filters and suitable fan were needed for bigger hydroponic scales. This was aimed to reach the ideal temperature, which far from the ambient temperature. The ideal temperature can be maintained by other heat replacement techniques, such as a peltier or refrigerator and other input parameters, models, and methods. The test place with a different air environment temperature from this study was recommended to change the membership of the input, output, and rules in the program by considering other factors, such as plant type, location, hydroponic system, etc.

CONCLUSION

The yield of NFT FLM system was better compared to the conventional NFT system.

FUNDING

Nil

AUTHORS CONTRIBUTIONS

All the authors contributed equally.

CONFLICT OF INTERESTS

Declared none

REFERENCES

1. Tagle S, Benzoza H, Pena R, Oblea A. Development of an indoor hydroponic tower for urban farming. Presented at the 6th DLSU Innovation and Technology Fair; 2018. p. 1-7. Available from: <https://www.dlsu.edu.ph/wp-content/uploads/pdf/conferences/ditech/proceedings/volume-3/paper-10.pdf> [Last accessed on 15 Jul 2020]
2. Chow YN, Lee LK, Zakaria NA, Foo KY. New emerging hydroponic system. Int Malaysia Indonesia Thailand Symposium Innovation Creativity (iMIT-SIC) 2017;2:1-4.
3. Danial OM. Even though it doesn't have extensive agricultural land, Oded stretches the city of Bandung into vegetable self-sufficiency. Available from: <https://bandungkita.id/2020/01/12/meski-tak-punya-lahan-pertanian-luas-oded-usung-kota-bandung-swasembada-sayuran/> [Last accessed on 12 Jan 2020].
4. Lennard W, Ward J. A comparison of plant growth rates between an NFT hydroponic system and an NFT aquaponic system. Horticulturae 2019;5:1-16.
5. Hyun Ju K, Young Son C, Oh Keun K, Myung Whan C, Jae Bok H, Soon Do B, et al. Effect of pH and EC of hydroponic solution on the growth of greenhouse rose. Asian J Plant Sci 2005;4:348-55.
6. Nxawe S, Ndadikemi P, Laubscher CP. Possible effects of regulating hydroponic water temperature on plant growth, accumulation of nutrients and other metabolites. Afr J Biotech 2011;9:128-34.
7. Al-Rawahy MS, Al-Rawahy SA, Al-Mulla YA, Nadaf SK. Influence of nutrient solution temperature on its oxygen level and growth, yield and quality of hydroponic cucumber. J Agric Sci 2019;11:75-92.
8. Pedersen O, Perata P, Voesenek LACJ. Flooding and low oxygen responses in plants. Functional Plant Biol 2017;44:iii-vi.
9. Colombi T, Keller T. Developing strategies to recover crop productivity after soil compaction-a plant eco-physiological perspective. Soil Tillage Res 2019;191:156-61.
10. Rosberg AK, Wohanka W, Hultberg M, Alsanian BW. Implications on the root microbial community in the presence of *Pythium ultimum* in soilless cultivation systems. Acta Horticulturae 2019;1266:215-22.
11. Fortnum BA, Rideout J, Martin SB, Gooden D. Nutrient solution temperature affects pythium root rot of tobacco in greenhouse float systems. Plant Dis 2000;84:289-94.
12. How to cool your hydroponic reservoir. Available from: <https://www.bigbloomhydroponics.com/hydro/how-to-cool-your-hydroponic-reservoir/> [Last accessed on 18 Jan 2020]
13. Five options to cool your hydroponic nutrient solution. Available from: <https://www.saferbrand.com/articles/cool-nutrient-solution> [Last accessed on 18 Jan 2020]
14. Chil CD, Kim SY, Jeong JC, Lee YB. Solution temperature effects on potato growth and mineral uptake in hydroponic system. Acta Horticulturae 2001;548:517-22.
15. What is the ideal nutrient solution temperature in hydroponics? Available from: <https://scienceinhydroponics.com/2017/06/what-is-the-ideal-nutrient-solution-temperature-in-hydroponics.html> [Last accessed on 25 Jan 2020].
16. Meteorology Climatology and Geophysics Council. Average Temperature and Humidity Data; 2019. Available from: <http://data.bandung.go.id/dataset/rata-rata-suhu-dan-kelembaban-udara-menurut-bulan-di-kota-bandung/resource/9e2648b2-f237-4522-a365-268f3934626f> [Last accessed on 20 Jan 2020].
17. Morrill JC, Bales RC, Conklin MH. Estimating stream temperature from air temperature: implications for future water quality. J Environ Eng 2005;131:139-46.
18. Mooij WM, De Senerpont Domis, LN Hülsmann S. The impact of climate warming on water temperature, timing of hatching and young-of-the-year growth of fish in shallow lakes in the Netherlands. J Sea Res 2008;60:32-43.

19. Daskalaki A, Burrage SW. Solution temperature and the uptake of water and nutrients by cucumber (*Cucumis sativus* L.) in hydroponics. *Acta Horticulturae* 1998;458:317-22.
20. Fauzan MN, Saptarini NM. Application of the mamdani fuzzy logic multi output method to maintain electrical conductivity in hydroponic media for lettuce (*Lactuca sativa* L.) and bok choy (*Brassica rapa* L.). *J Global Pharma Tech* 2020;12:634-40.
21. Arduino Uno Rev3. Store. Arduino. Cc, 1. Available from: <https://store.arduino.cc/arduino-uno-rev3> [Last accessed on 24 Jan 2020]
22. Lee CC. Fuzzy logic in control systems: fuzzy logic controller-I. *IEEE Transactions Systems Man Cybernatics* 1990;20:404-18.
23. Lee CC. Fuzzy logic in control systems: fuzzy logic controller-II. *IEEE Transactions Systems Man Cybernatics* 1990;20:419-35.
24. Kuncoro CBD, Sutandi T, Falahuddin MA. The development of the nutrient solution cooling system for the hydroponic cultivation. *Unikom J* 2017;V:67-72.
25. Fernando EAH, Bandala AA, Lim LAG, Maglaya AB, Ledesma N, Vicerra RR, *et al.* Design of a fuzzy logic controller for a vent fan and growlight in a tomato growth chamber. *Proceeding of IEEE 9th International Conference on Humanoid, Nanotechnology, Information Technology, Communication and Control, Environment and Management (HNICEM)*; 2017. p. 1-5.
26. Kahlen K, Zinkernagel J, Stutzel H. Modeling temperature-modulated stem growth of cucumber plants (*Cucumis sativus* L.). *Proceeding of IEEE 4th International Symposium on Plant Growth Modeling, Simulation, Visualization and Applications*; 2012. p. 188-91.
27. Kumar AS, Sudha S. Design of wireless sensor network based fuzzy logic controller for a cold storage system. *Proceeding of IEEE 7th Power India International Conference (PIICON)*; 2016. p. 1-6.