

- Notes:
1. Material: RoHS compliant 12AWG (0.08") Aluminum.
  2. Break all sharp edges and mask all threads prior to powder coat.
  3. Part is to be powder coated with Cardinal color C031-WH120.  
Coating thickness must be between 0.05 and 0.12mm.
  4. Mark in indicated area with company identifier.
  5. Parts must be clean, free of oil and debris

Revisions

A 7/3/19 Make dashed lines solid for supplier mark location KJ



DRAWN BY: West	DATE: 3/19/19
MATERIAL: See notes	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE:	
DECIMALS .X±.75 .XX±.25 .XXX±.125 .XXXX±.050	ANGLES X°±1° 63°
BREAK EDGES 0.1/0.5 FILLET RADIUS 0.1/0.5	




**ALEPH  
OBJECTS**  
INCORPORATED

626 West 66th Street  
Loveland, Colorado 80538, USA  
Phone +1-970-377-1111  
www.alephobjects.com


TITLE Left side mini white	
SIZE A	DWG NO. PP-FP0170
SCALE N/A	DO NOT SCALE DRAWING
SHEET 1 of 4	
REV. B	

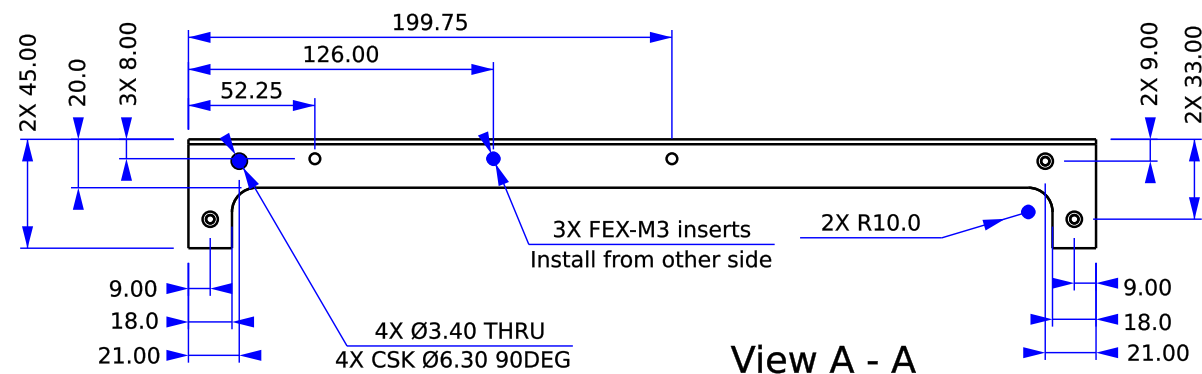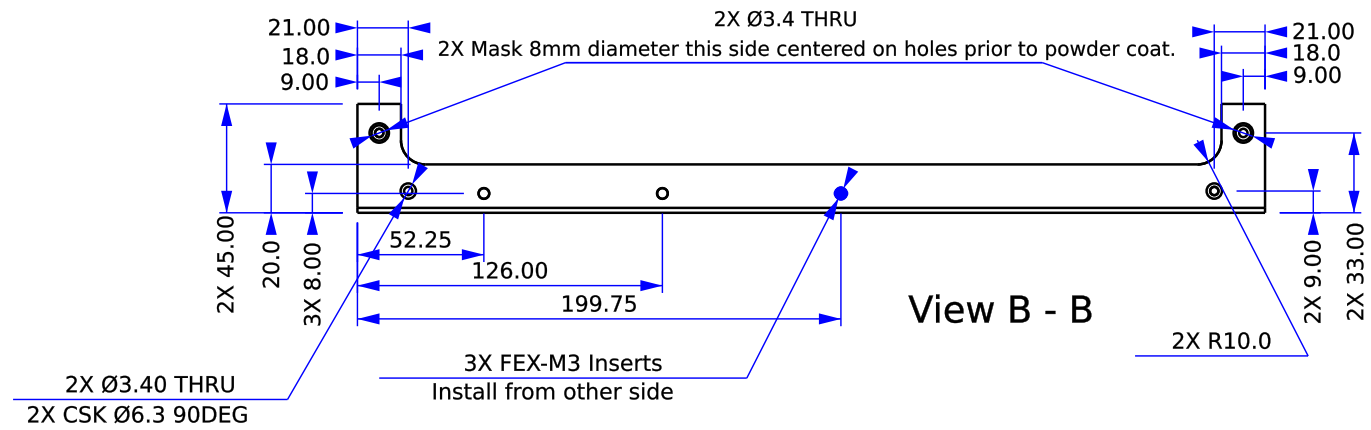

TITLE			
left side mini white			
SIZE	DWG NO.		REV.
A	PP-FP0170		B
SCALE	N/A	DO NOT SCALE DRAWING	SHEET 2 of 4

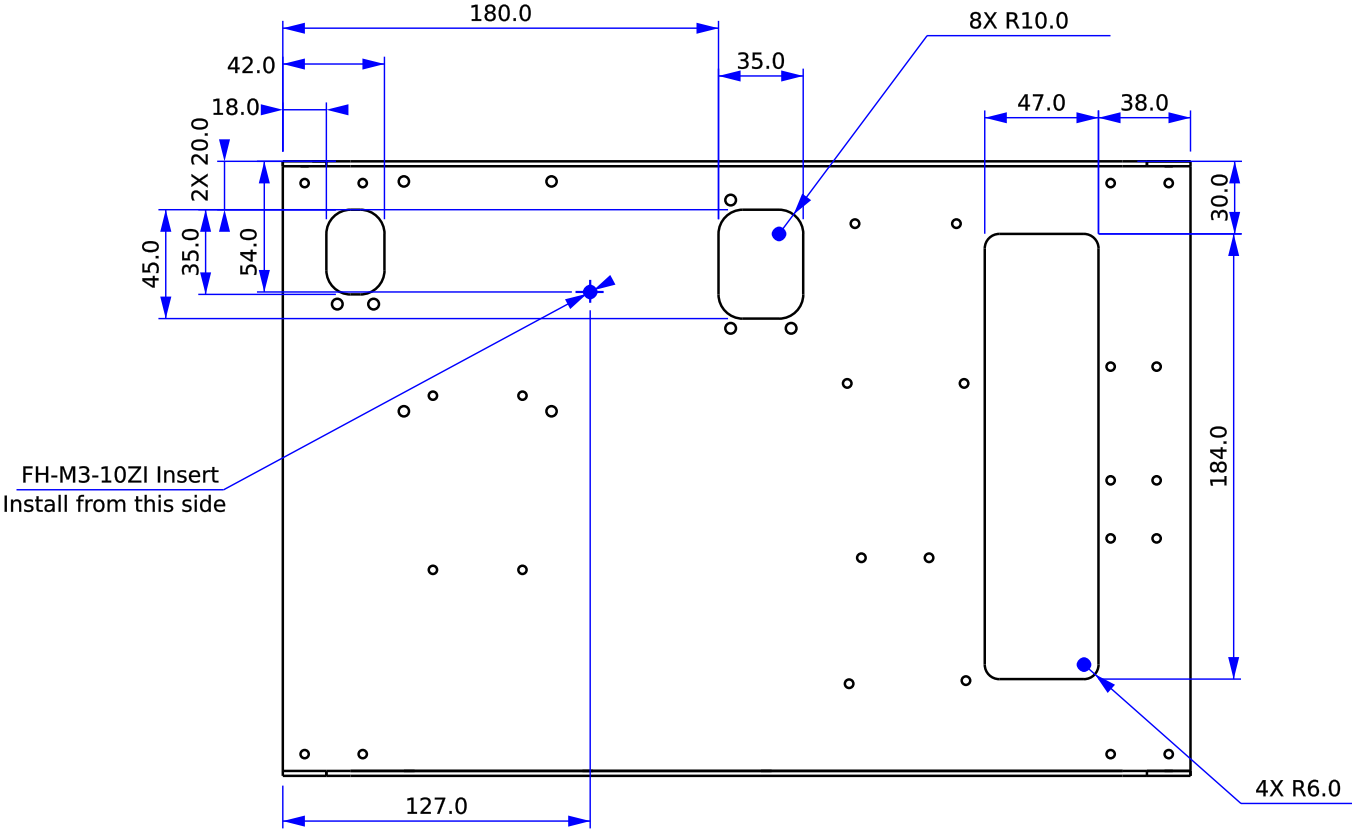

TITLE			
left side mini white			
SIZE	DWG NO.	REV.	
A	PP-FP0170	B	
SCALE	N/A	SHEET	3 of 4
DO NOT SCALE DRAWING			

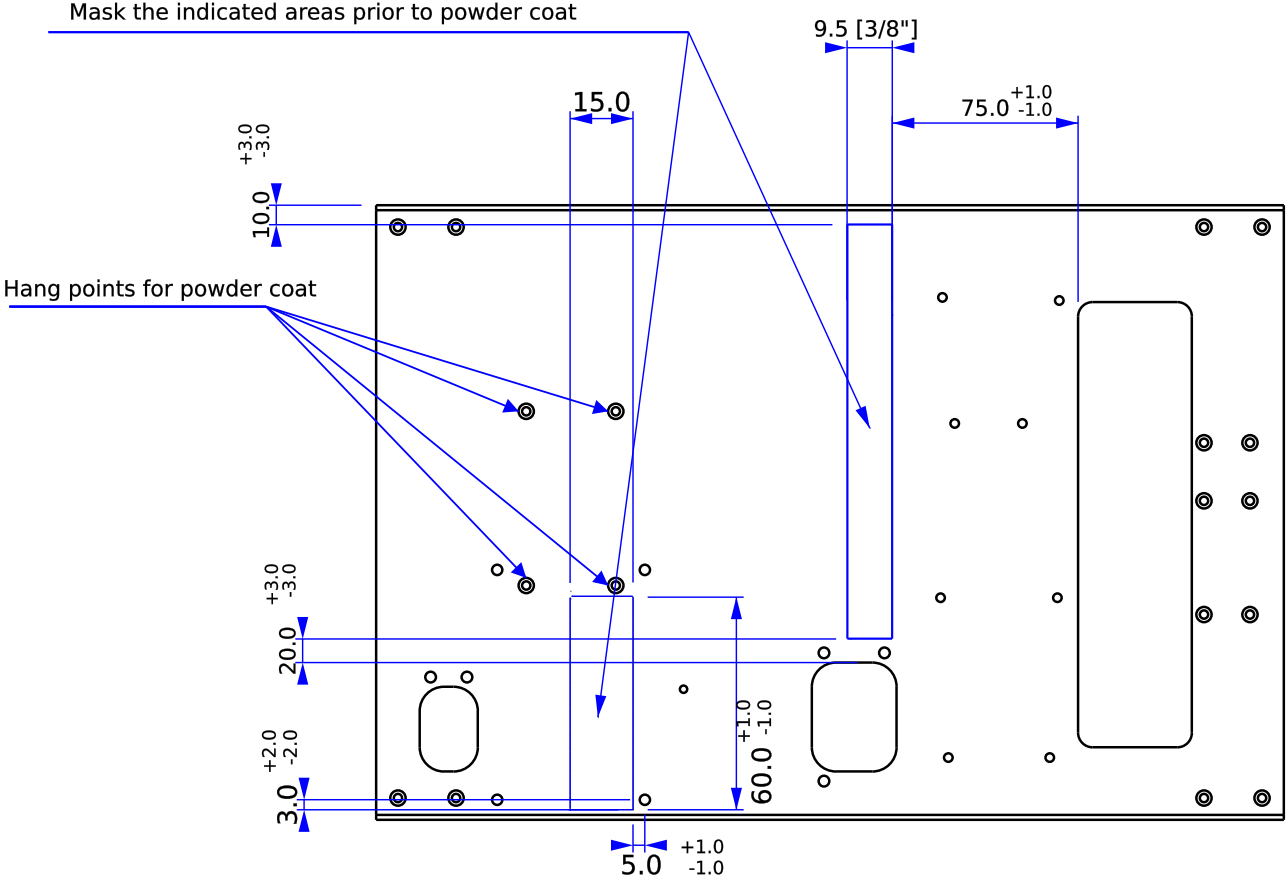

TITLE			
Left side mini white			
SIZE	DWG NO.		REV.
A	PP-FP0170		B
SCALE	N/A	DO NOT SCALE DRAWING	SHEET 4 of 4