


## 11 Links 30mm Cable Chain [EL-MS0380]

30mm Inner Width Mounting Brackets (male and female) – [EL-MS0383]



\* use shown orientation

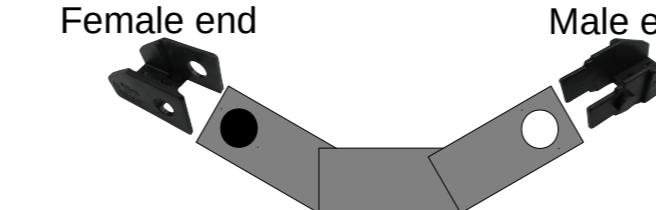

## 18 Links 20mm Cable Chain [EL-MS0379]

3] 20mm Inner Width Mounting Brackets (male and female) – [EL-MS0382]

\* use show orientation

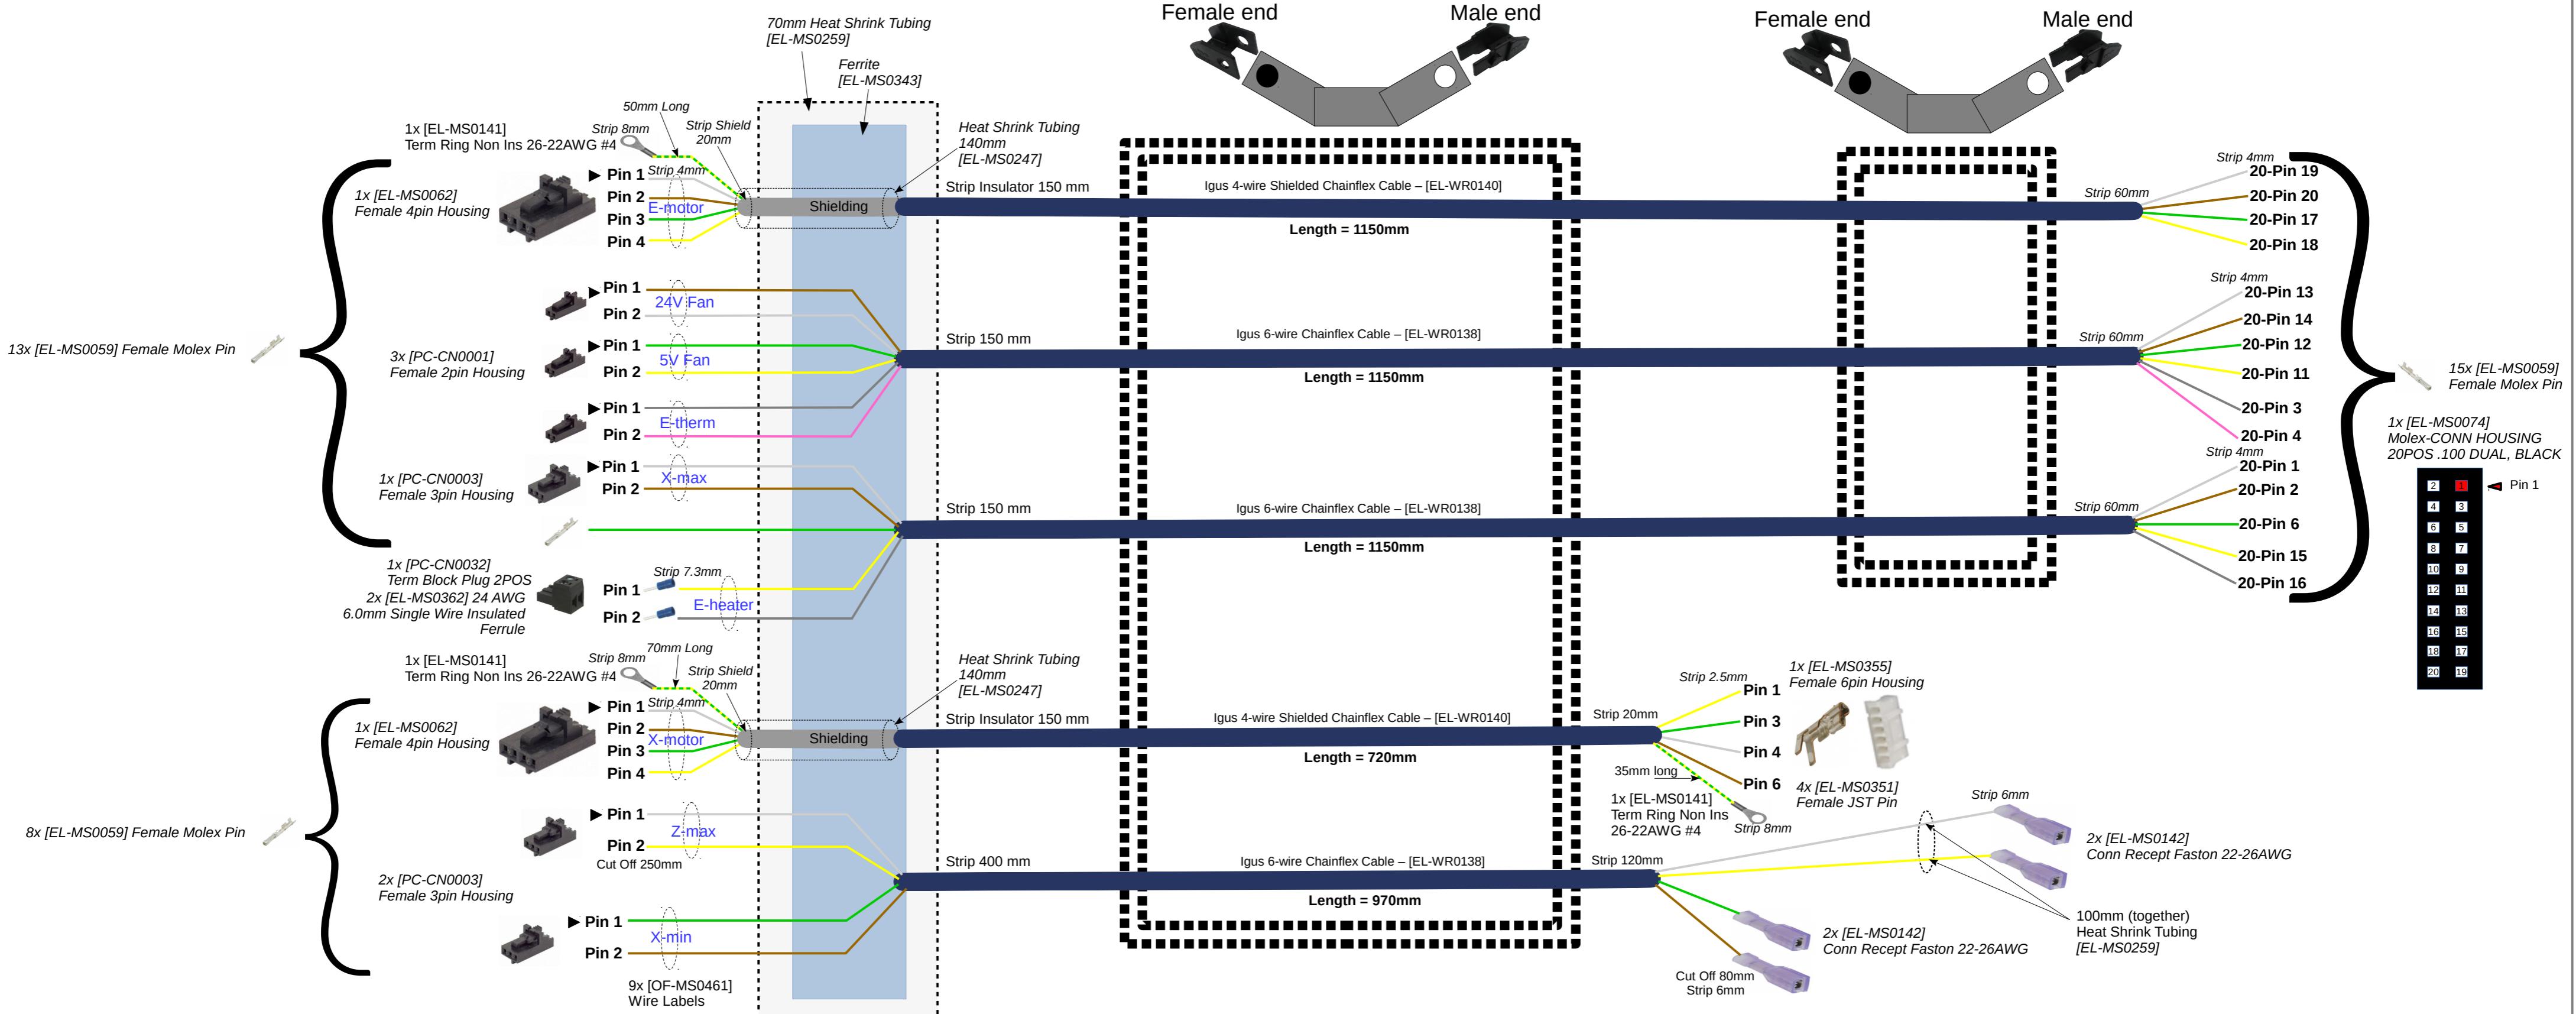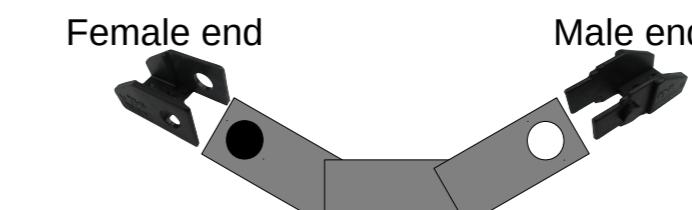

Cut Tolerance:  $\pm 3.175\text{mm}/0.3048\text{m}$   
 $\pm 1.04166\%$

Rev	Date	Changes
F	08/02/2016	-Lengthen X-min by 250mm -Shorten X-motor right-side shielding to 35mm
G	08/09/2016	-Correct right-side EL-MS0059 Qty (15) -Include Z-max right-side heat shrink PN (EL-MS025) -Include wire label PN (OF-MS0461) and Qty (9)

Gladiola		 <b>ALEPH OBJECTS®</b> <small>INCORPORATED</small>	 <b>LULZBOT</b>
DRAWN BY E N Kuzmenko	DATE 08/04/2016		
CHECKED BY Mic	DATE 08/09/2016	TITLE	X Extruder Harness
EL-HR0108		FILE NAME	x_extruder_harnesses
		SHEET	1
		REV.	G