

Notes:

1. Material: RoHS compliant 12AWG (0.08") Aluminum.
2. Break all sharp edges and mask all threads prior to powder coat.
3. Part is to be powder coated with Cardinal color C241-BK109.
Coating thickness must be between 0.05 and 0.12mm.

4. Mark in indicated area with company identifier.

5. Parts must be clean, free of oil and debris

Rev Date Description

K	2.13.18	Added note 5, hang point callouts
J	1.22.18	Added Masking for EINSY heatsink
I	11.9.17	Rev for Mini2
H	9.20.16	Dimension of masking modified for clarity

DRAWN BY:
bam

DATE:
7.7.16

MATERIAL:
See Notes

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES ARE:

DECIMALS	ANGLES
.X±.75	X°±1°
.XX±.25	
.XXX±.125	
.XXXX±.050	

BREAK EDGES 0.1/0.5
FILLET RADIUS 0.1/0.5



**ALEPH
OBJECTS**
INCORPORATED

626 West 66th Street
Loveland, Colorado 80538, USA
Phone +1-970-377-1111
www.alephobjects.com

TITLE

Left side mini

SIZE

DWG NO.

PP-FP0055

REV.

K



SCALE

1:3


DO NOT SCALE DRAWING

SHEET


1 of 4

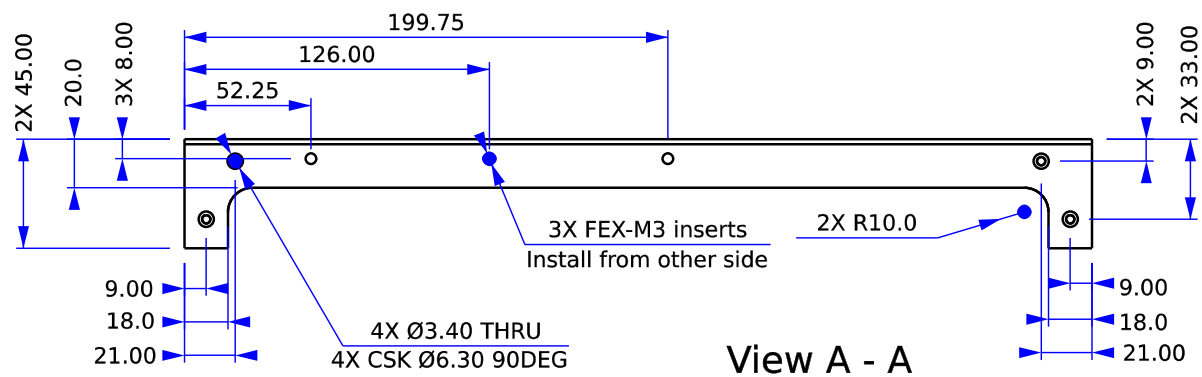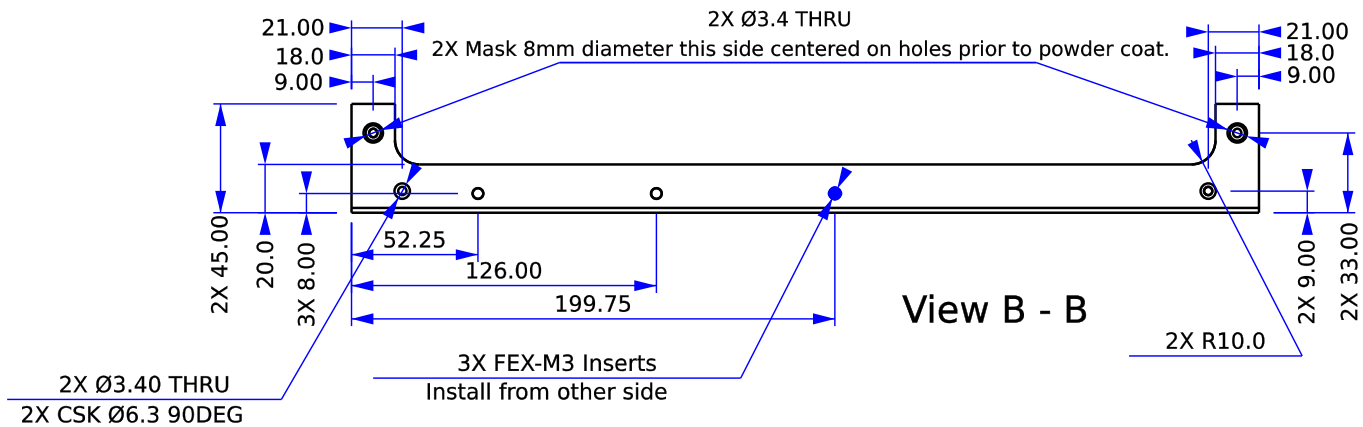

TITLE			
Left side mini			
SIZE	DWG NO.		REV.
A	PP-FP0055		K
SCALE	1:3	DO NOT SCALE DRAWING	SHEET 2 of 4

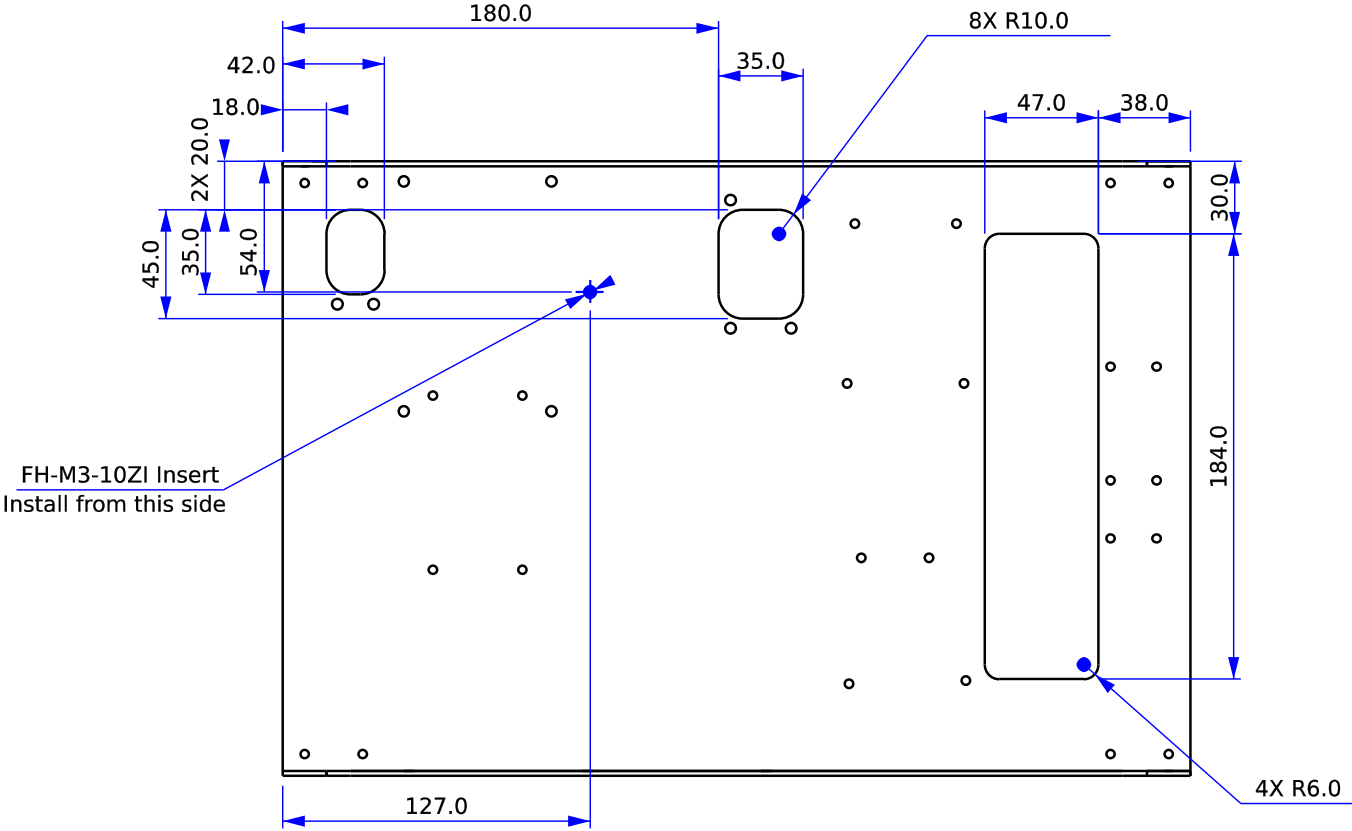

TITLE			
Left side mini			
SIZE	DWG NO.		REV.
A	PP-FP0055		K
SCALE	1:3	DO NOT SCALE DRAWING	SHEET 3 of 4

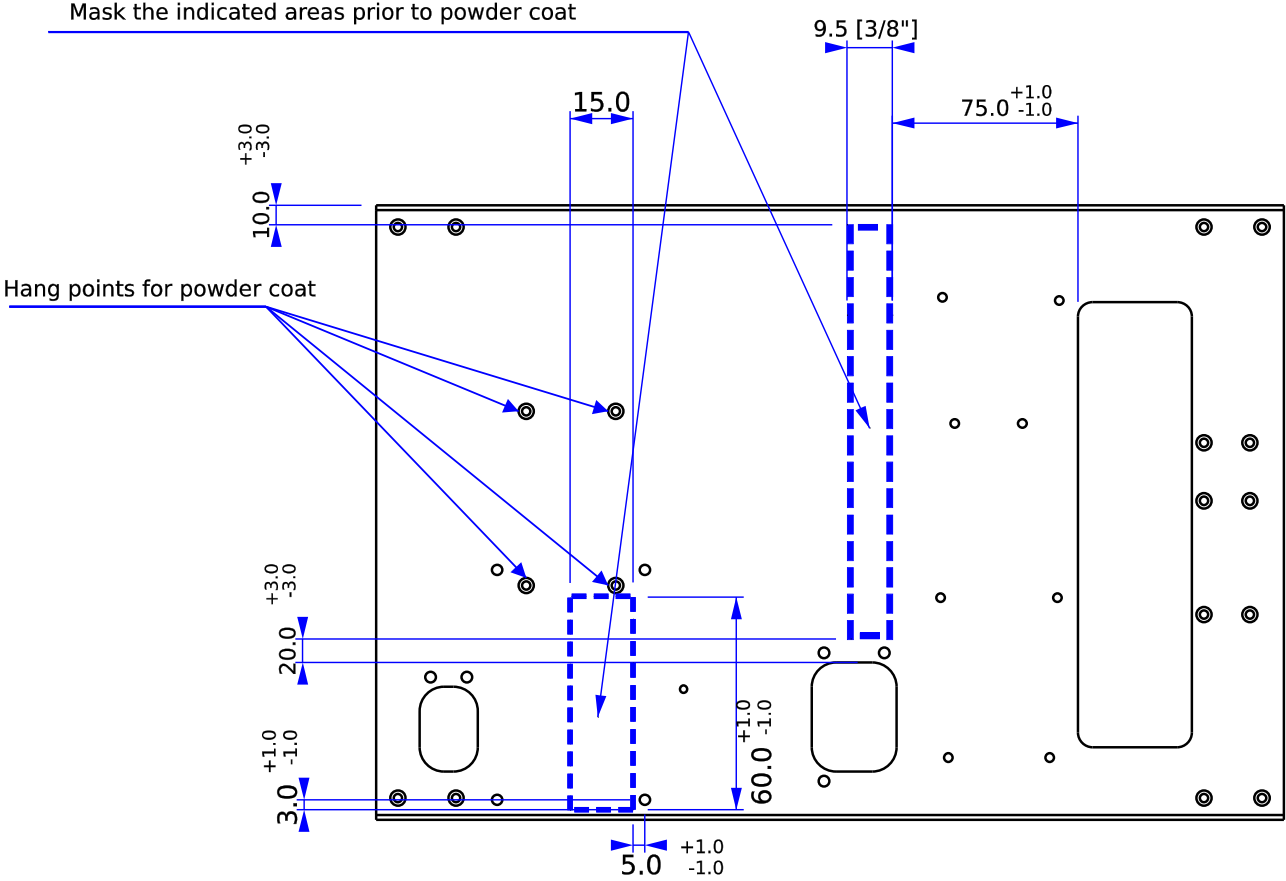

TITLE			
Left side mini			
SIZE	DWG NO.		REV.
A	PP-FP0055		K
SCALE	1:3	DO NOT SCALE DRAWING	SHEET 4 of 4