



PRESENTACION

GRUPO #5

Nombre:

Mahonri Cuevas

Erleny Reyes

Joel Lara

Jesús de los Santos

Profesor:

Onel Luis Pelegrino

Tema:

Implementación de red empresarial

Scrum Master (SM): Líder del equipo de redes


-Mahonri Cuevas


Development Team (DevTeam): Estudiantes / técnicos de redes.

-Erleny Reyes


-Joel Lara

-Jesús de los Santos

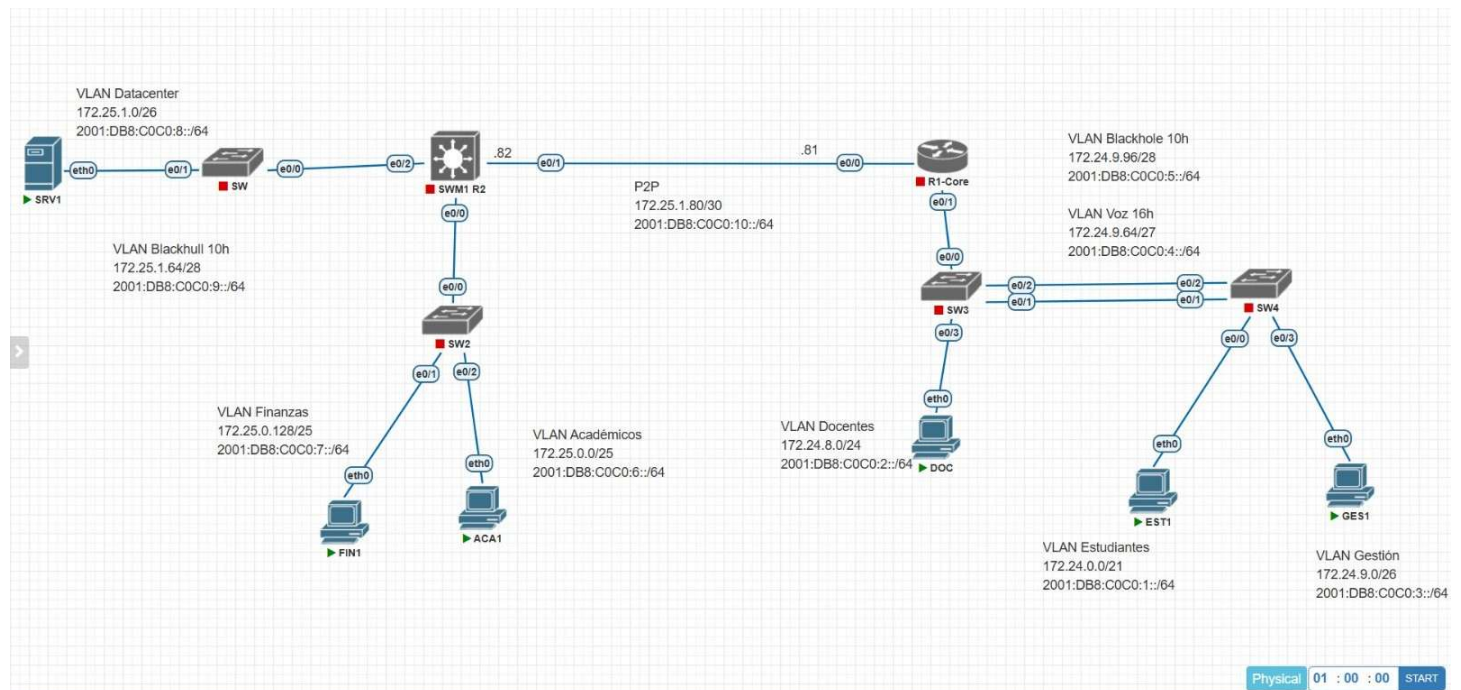

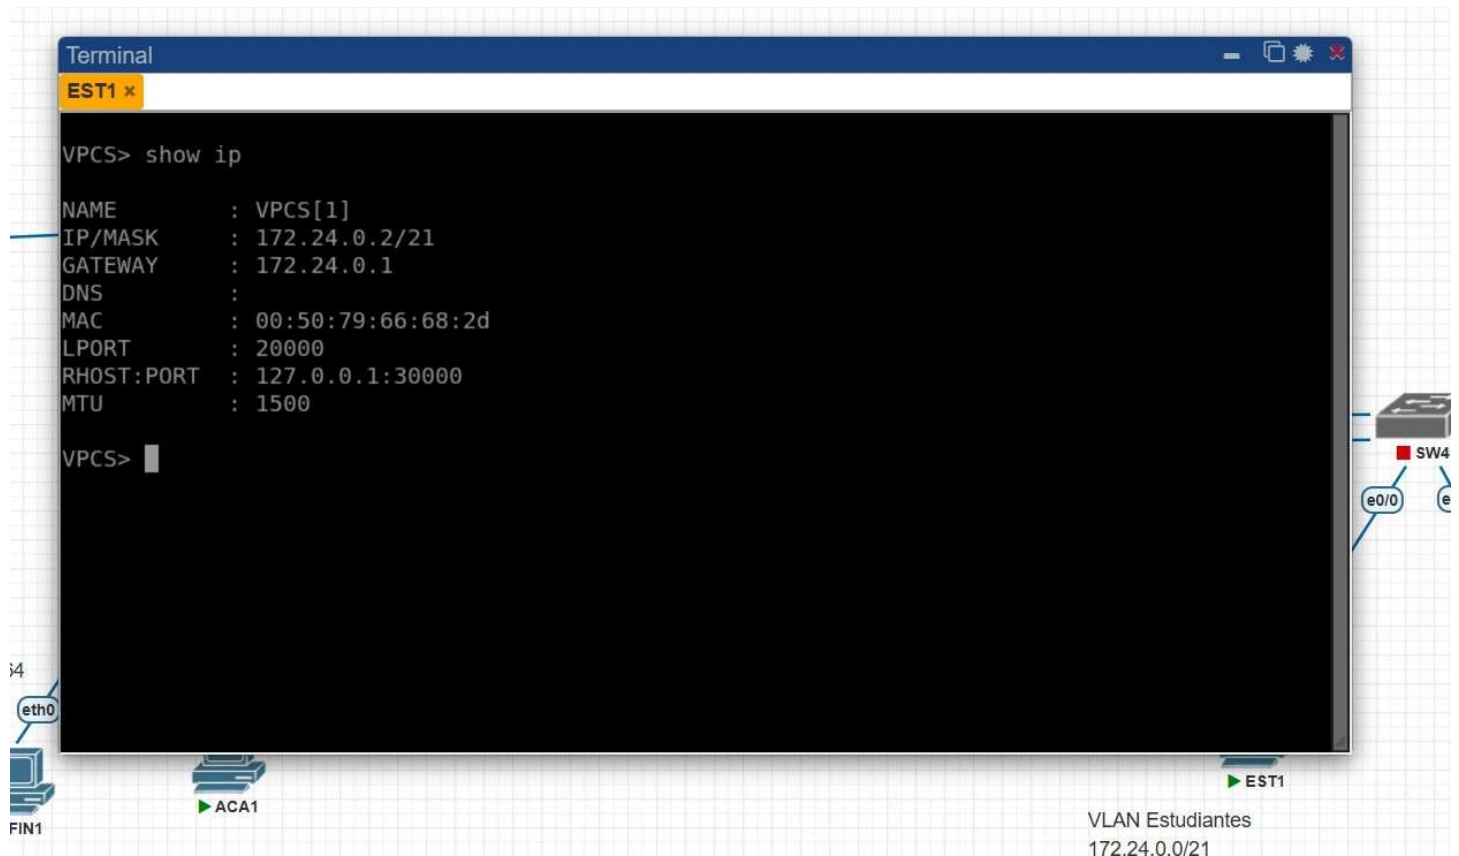

Show ip

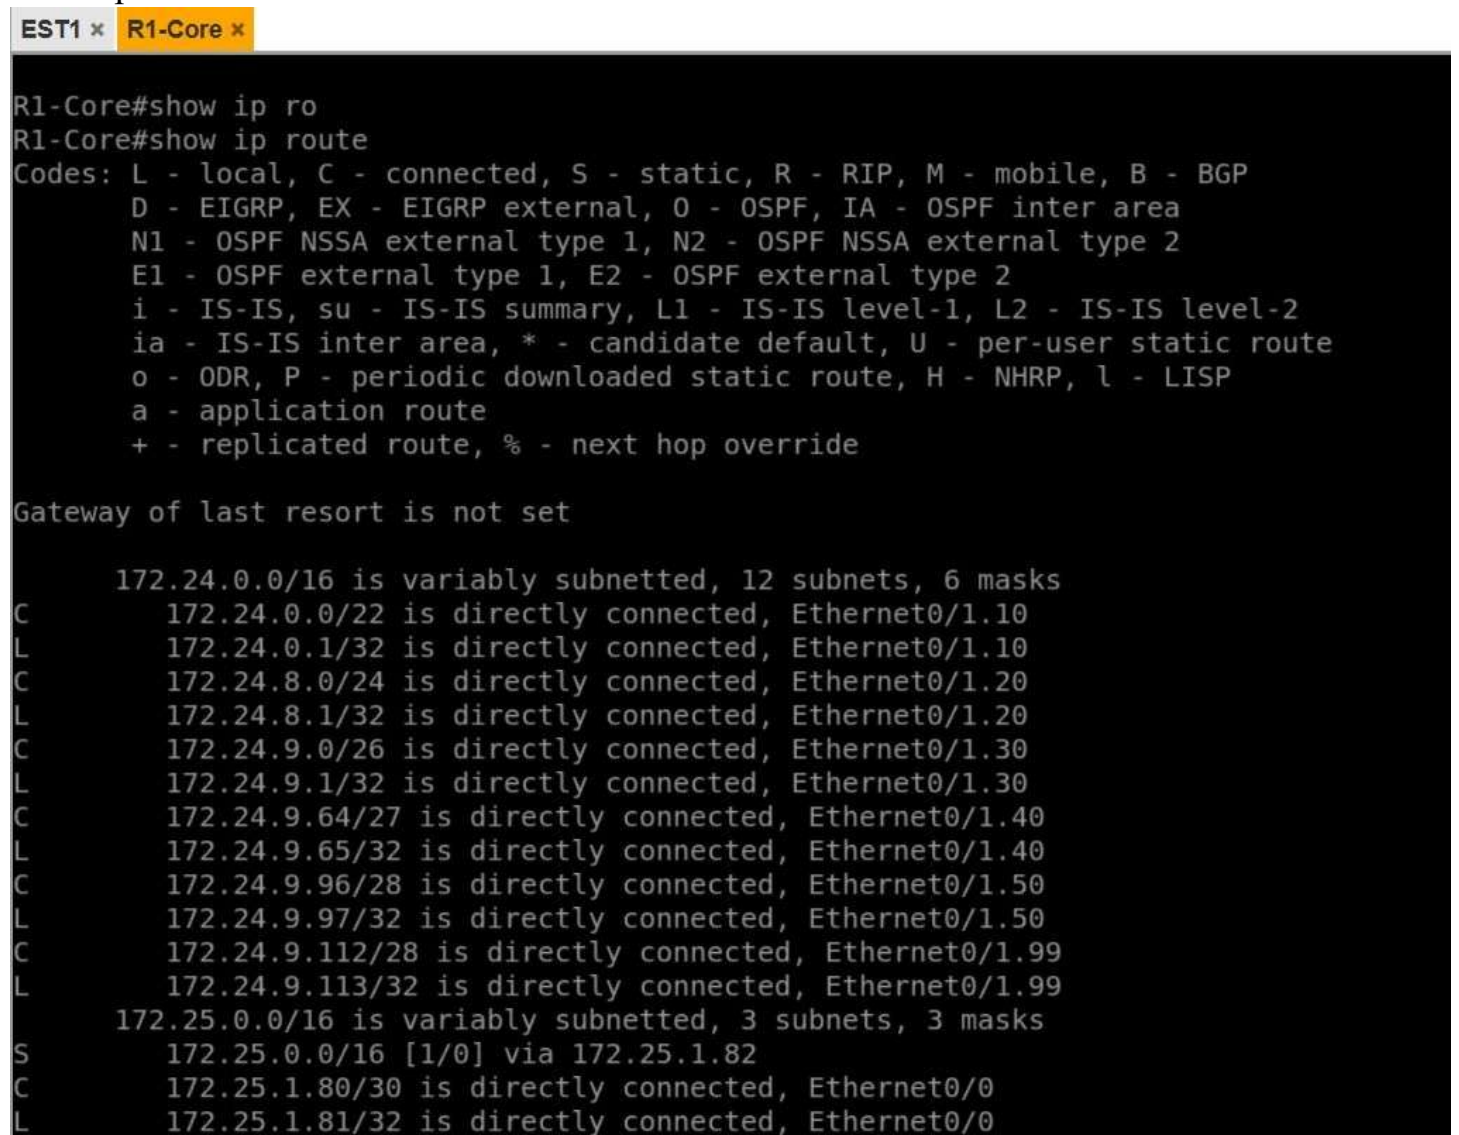

Show ip route

```
R1-Core#show ip interface brief
Interface                IP-Address      OK? Method Status      Protocol
Ethernet0/0              172.25.1.81     YES NVRAM    up          up
Ethernet0/1              unassigned      YES NVRAM    up          up
Ethernet0/1.10           172.24.0.1      YES NVRAM    up          up
Ethernet0/1.20           172.24.8.1      YES NVRAM    up          up
Ethernet0/1.30           172.24.9.1      YES NVRAM    up          up
Ethernet0/1.40           172.24.9.65     YES NVRAM    up          up
Ethernet0/1.50           172.24.9.97     YES NVRAM    up          up
Ethernet0/1.99           172.24.9.113    YES NVRAM    up          up
Ethernet0/2              unassigned      YES NVRAM    administratively down down
Ethernet0/3              unassigned      YES NVRAM    administratively down down
R1-Core#
```

Show ip interface brief

```
EST1 x R1-Core x

R1-Core#show ip ro
R1-Core#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override

Gateway of last resort is not set

    172.24.0.0/16 is variably subnetted, 12 subnets, 6 masks
C       172.24.0.0/22 is directly connected, Ethernet0/1.10
L       172.24.0.1/32 is directly connected, Ethernet0/1.10
C       172.24.8.0/24 is directly connected, Ethernet0/1.20
L       172.24.8.1/32 is directly connected, Ethernet0/1.20
C       172.24.9.0/26 is directly connected, Ethernet0/1.30
L       172.24.9.1/32 is directly connected, Ethernet0/1.30
C       172.24.9.64/27 is directly connected, Ethernet0/1.40
L       172.24.9.65/32 is directly connected, Ethernet0/1.40
C       172.24.9.96/28 is directly connected, Ethernet0/1.50
L       172.24.9.97/32 is directly connected, Ethernet0/1.50
C       172.24.9.112/28 is directly connected, Ethernet0/1.99
L       172.24.9.113/32 is directly connected, Ethernet0/1.99
    172.25.0.0/16 is variably subnetted, 3 subnets, 3 masks
S       172.25.0.0/16 [1/0] via 172.25.1.82
C       172.25.1.80/30 is directly connected, Ethernet0/0
L       172.25.1.81/32 is directly connected, Ethernet0/0
```

Show ip ssh


```
Terminal
R1-Core x
interface Ethernet0/0
description CONECTADO A R2
ip address 172.25.1.81 255.255.255.252
ipv6 address FE80::1 link-local
ipv6 address 2001:DB8:C0C0:10::1/64
!
interface Ethernet0/1
no ip address
!
interface Ethernet0/1.10
description VLAN ESTUDIANTES
encapsulation dot1Q 10
ip address 172.24.0.1 255.255.252.0
ipv6 address FE80::1 link-local
ipv6 address 2001:DB8:C0C0:1::1/64
!
interface Ethernet0/1.20
description VLAN DOCENTES
encapsulation dot1Q 20
ip address 172.24.8.1 255.255.255.0
ipv6 address FE80::1 link-local
ipv6 address 2001:DB8:C0C0:2::1/64
!
```

part3

```
Terminal
R1-Core x
interface Ethernet0/1.30
description VLAN GESTION
encapsulation dot1Q 30
ip address 172.24.9.1 255.255.255.192
ipv6 address FE80::1 link-local
ipv6 address 2001:DB8:C0C0:3::1/64
!
interface Ethernet0/1.40
description VLAN VOZ
encapsulation dot1Q 40
ip address 172.24.9.65 255.255.255.224
ipv6 address FE80::1 link-local
ipv6 address 2001:DB8:C0C0:4::1/64
!
interface Ethernet0/1.50
description VLAN BLACKHOLE
encapsulation dot1Q 50
ip address 172.24.9.97 255.255.255.240
ipv6 address FE80::1 link-local
ipv6 address 2001:DB8:C0C0:5::1/64
```

part4

```
Terminal
R1-Core x
!
interface Ethernet0/2
  no ip address
  shutdown
!
interface Ethernet0/3
  no ip address
  shutdown
!
ip forward-protocol nd
!
!
no ip http server
no ip http secure-server
ip route 172.25.0.0 255.255.0.0 172.25.1.82
!
ipv6 route 2001:DB8:C0C0:6::/64 2001:DB8:C0C0:10::2
ipv6 route 2001:DB8:C0C0:7::/64 2001:DB8:C0C0:10::2
ipv6 route 2001:DB8:C0C0:8::/64 2001:DB8:C0C0:10::2
ipv6 route 2001:DB8:C0C0:9::/64 2001:DB8:C0C0:10::2
!
!
!
```

part5

```
Terminal
R1-Core x SW4 x
SW4#show vlan brief

VLAN Name                Status    Ports
-----
1    default                active    Et0/0
10   Estudiantes             active    Et0/0
20   Docentes                active    Et0/3
30   Gestion                 active    Et0/3
40   Voz                     active
50   Blackhole               active
99   Nativa                  active
1002 fddi-default            act/unsup
1003 trcrf-default          act/unsup
1004 fddinet-default         act/unsup
1005 trbrf-default          act/unsup
SW4#
```

Show vlan en SW4

```
Terminal
R1-Core x SW4 x

SW4#show interfaces trunk

Port      Mode      Encapsulation  Status        Native vlan
Et0/1     on        802.1q         trunking      99
Et0/2     on        802.1q         trunking      99

Port      Vlans allowed on trunk
Et0/1     10,20,30,40,50,99
Et0/2     10,20,30,40,50,99

Port      Vlans allowed and active in management domain
Et0/1     10,20,30,40,50,99
Et0/2     10,20,30,40,50,99

Port      Vlans in spanning tree forwarding state and not pruned
Et0/1     10,20,30,40,50,99
Et0/2     none
SW4#
```

Show interfaces Trunk en SW4

```
Terminal
R1-Core x SW4 x

SW4#show vtp status
VTP Version capable      : 1 to 3
VTP version running      : 2
VTP Domain Name          : MAHONRI
VTP Pruning Mode         : Disabled
VTP Traps Generation     : Disabled
Device ID                : aabb.cc80.0600
Configuration last modified by 172.24.9.114 at 6-28-26 21:21:25

Feature VLAN:
-----
VTP Operating Mode       : Client
Maximum VLANs supported locally : 1005
Number of existing VLANs : 11
Configuration Revision    : 7
MD5 digest               : 0xB5 0x42 0xB5 0x82 0xA7 0xAE 0x4E 0xC6
                        : 0xA6 0xD3 0x86 0x54 0x06 0xAE 0xEE 0x59

SW4#
```

Show vtp status SW4


```
Terminal
R1-Core x SW4 x EST1 x GES1 x
84 bytes from 172.24.9.1 icmp_seq=1 ttl=255 time=3.626 ms
84 bytes from 172.24.9.1 icmp_seq=2 ttl=255 time=3.018 ms
84 bytes from 172.24.9.1 icmp_seq=3 ttl=255 time=1.999 ms
84 bytes from 172.24.9.1 icmp_seq=4 ttl=255 time=2.368 ms
84 bytes from 172.24.9.1 icmp_seq=5 ttl=255 time=2.034 ms
VPCS> ping 172.24.0.1
84 bytes from 172.24.0.1 icmp_seq=1 ttl=255 time=2.511 ms
84 bytes from 172.24.0.1 icmp_seq=2 ttl=255 time=2.178 ms
84 bytes from 172.24.0.1 icmp_seq=3 ttl=255 time=2.904 ms
84 bytes from 172.24.0.1 icmp_seq=4 ttl=255 time=3.091 ms
84 bytes from 172.24.0.1 icmp_seq=5 ttl=255 time=2.916 ms
VPCS> ping 172.25.0.129
84 bytes from 172.25.0.129 icmp_seq=1 ttl=254 time=6.993 ms
84 bytes from 172.25.0.129 icmp_seq=2 ttl=254 time=4.022 ms
84 bytes from 172.25.0.129 icmp_seq=3 ttl=254 time=4.802 ms
84 bytes from 172.25.0.129 icmp_seq=4 ttl=254 time=3.674 ms
84 bytes from 172.25.0.129 icmp_seq=5 ttl=254 time=2.791 ms
VPCS> 
```