
OSSM

Toy Mounting Guide

Flange plates and Vac-U-Lock · Version 1.0.0

RESEARCH + DESIRE

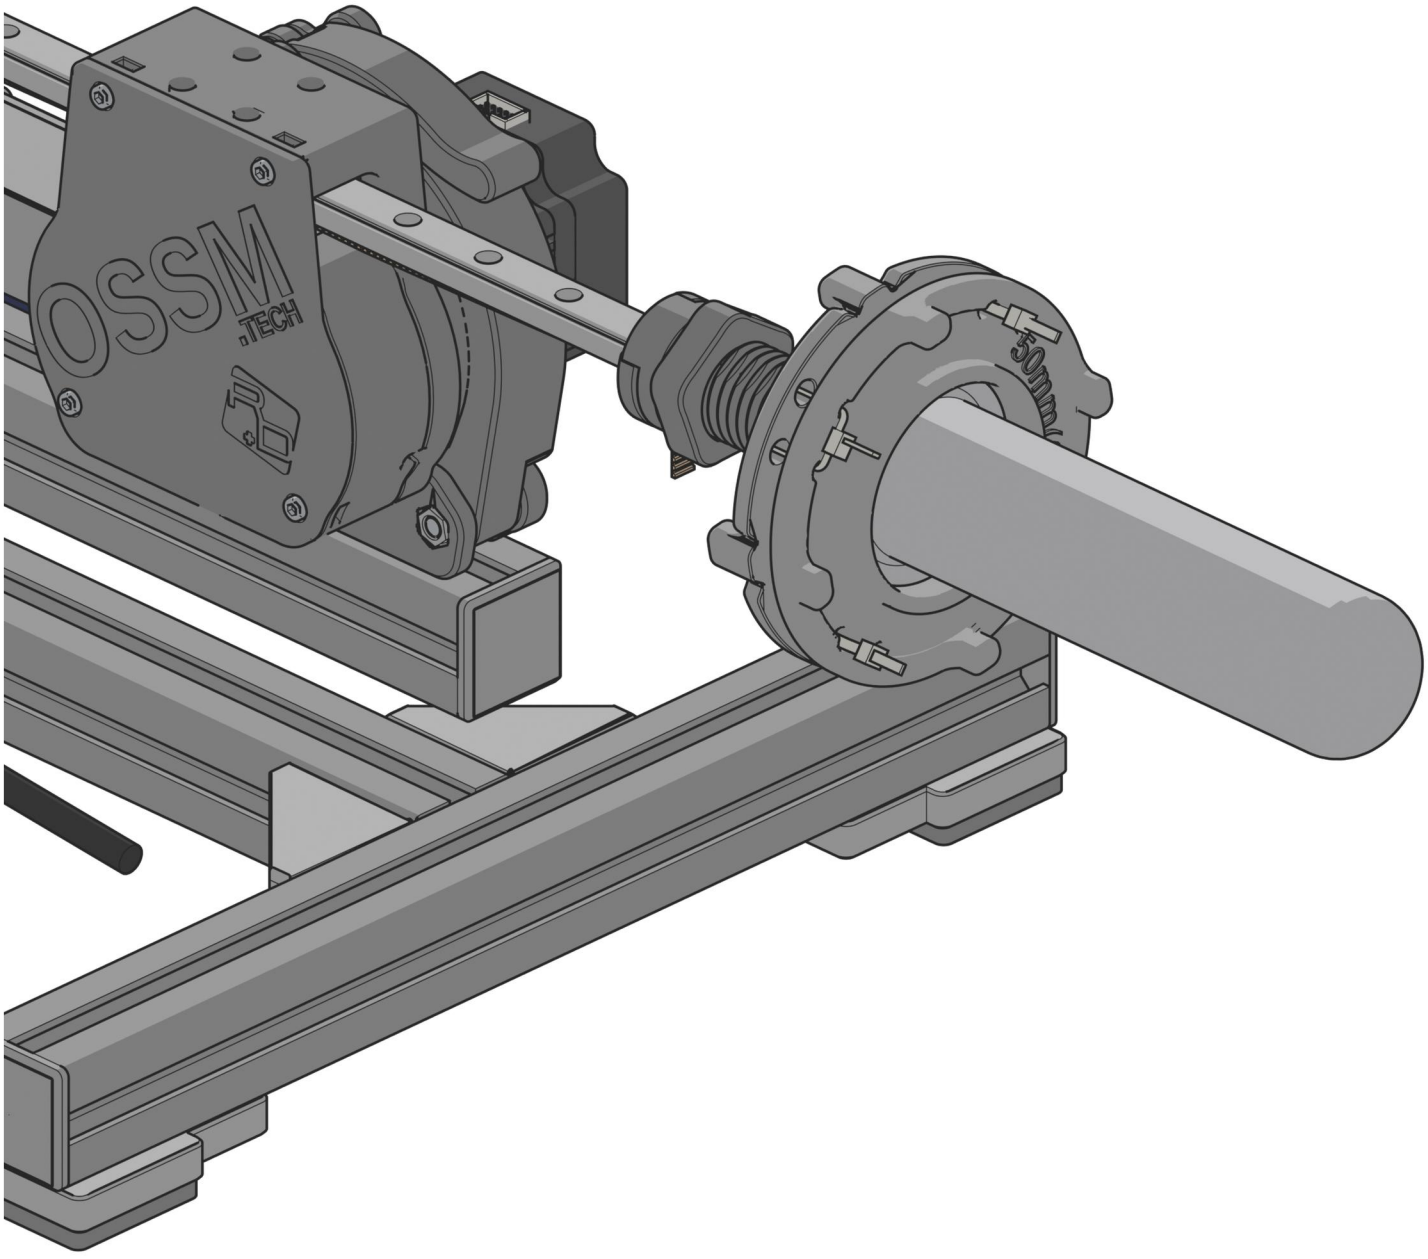


Support
support@researchanddesire.com


Assembly instructions
ohai.researchanddesire.com/ossm

Parts


3D printed




1×
Flange base



1×
50 mm
Flange ring




1×
63 mm
Flange ring




1×
Vac-U-Lock
adapter


Not in the kit



4×
Cable tie




1×
Toy




1×
Vac-U-Lock toy

1 Flange plates

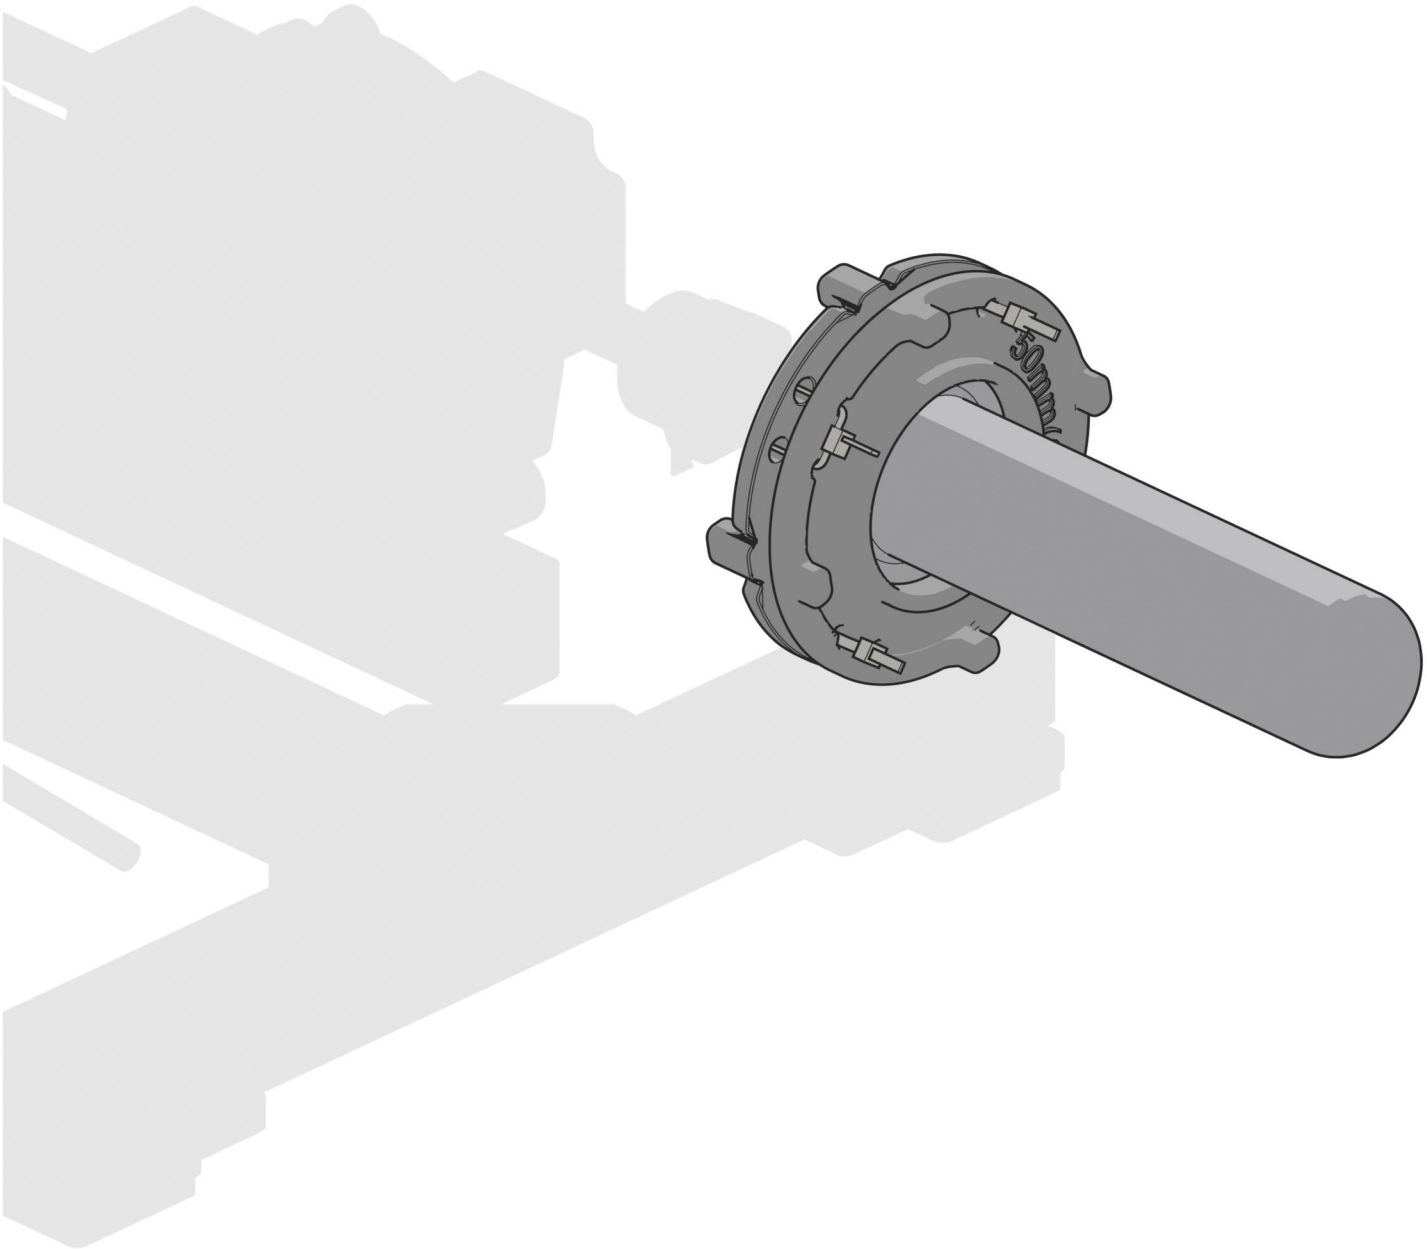


1




1×

Flange base

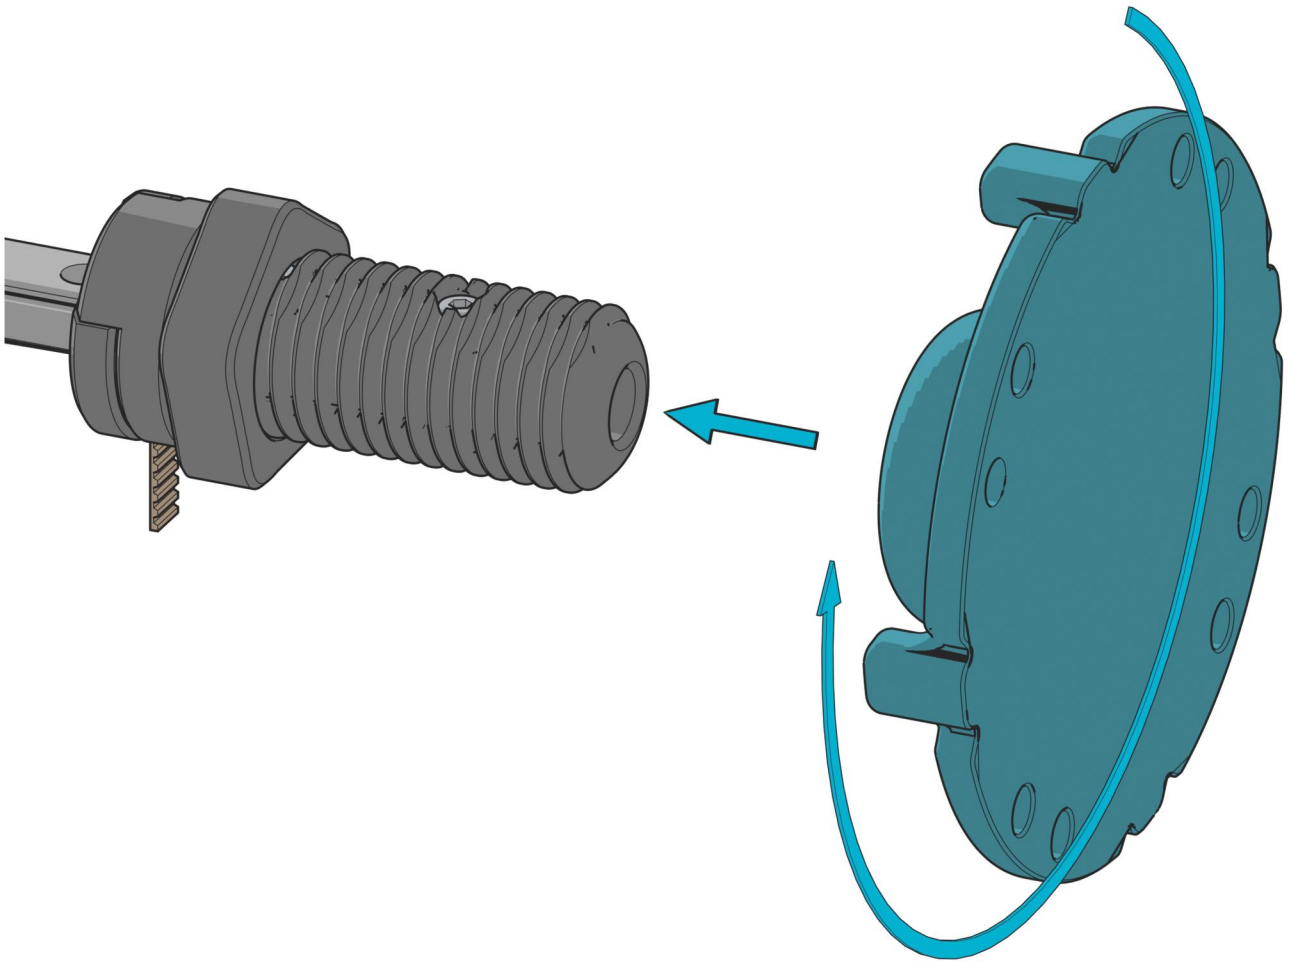


Turn it on by hand until it stops.

2

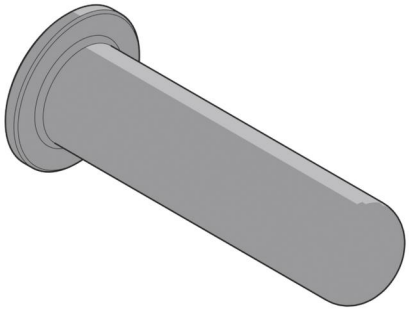


1×

Toy

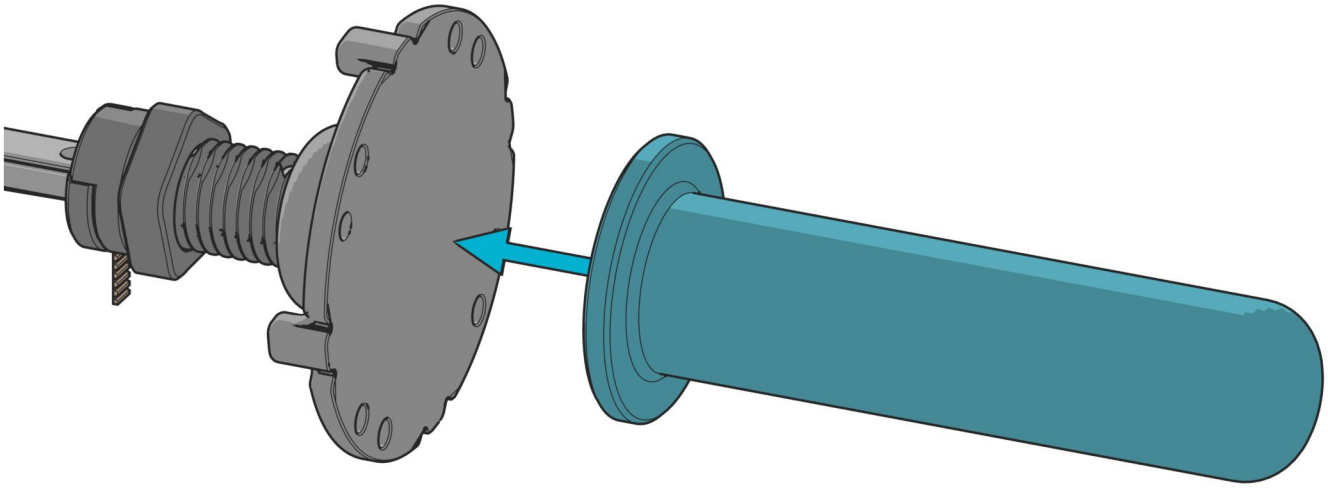



3

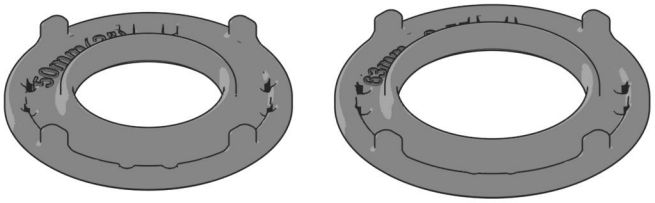

1×
50 mm
Flange ring


1×
63 mm
Flange ring

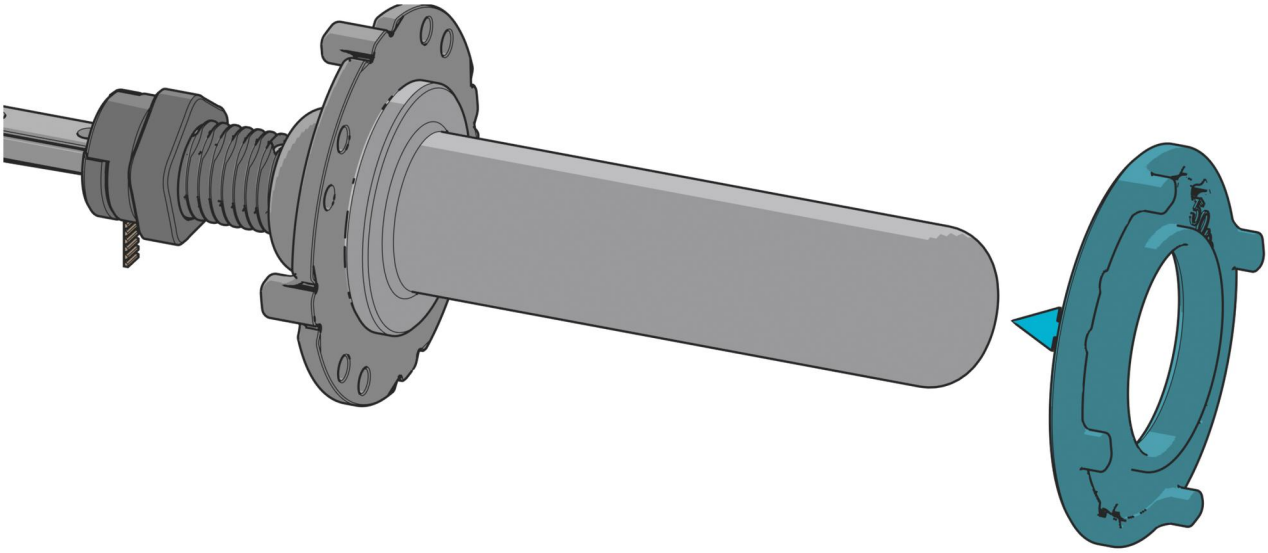

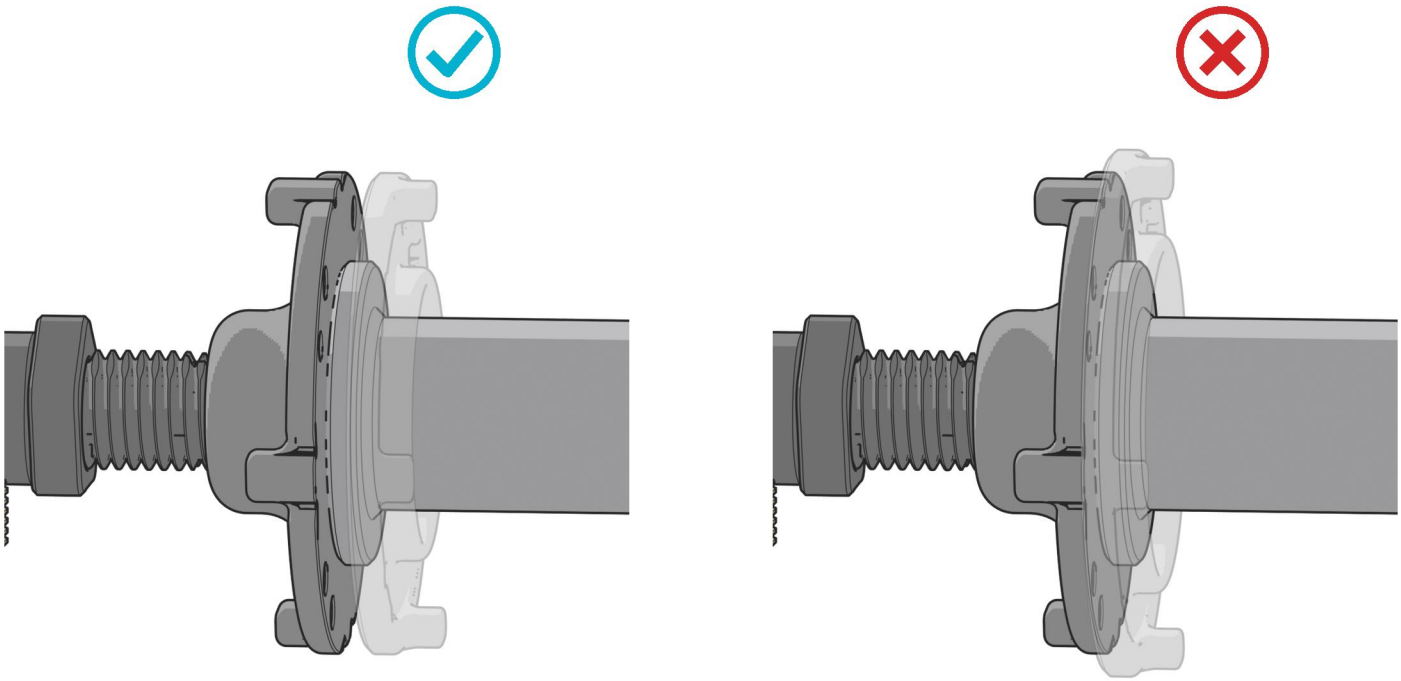


Use the ring whose hole slides over the toy but stops on its flared base.

4




4×

Cable tie

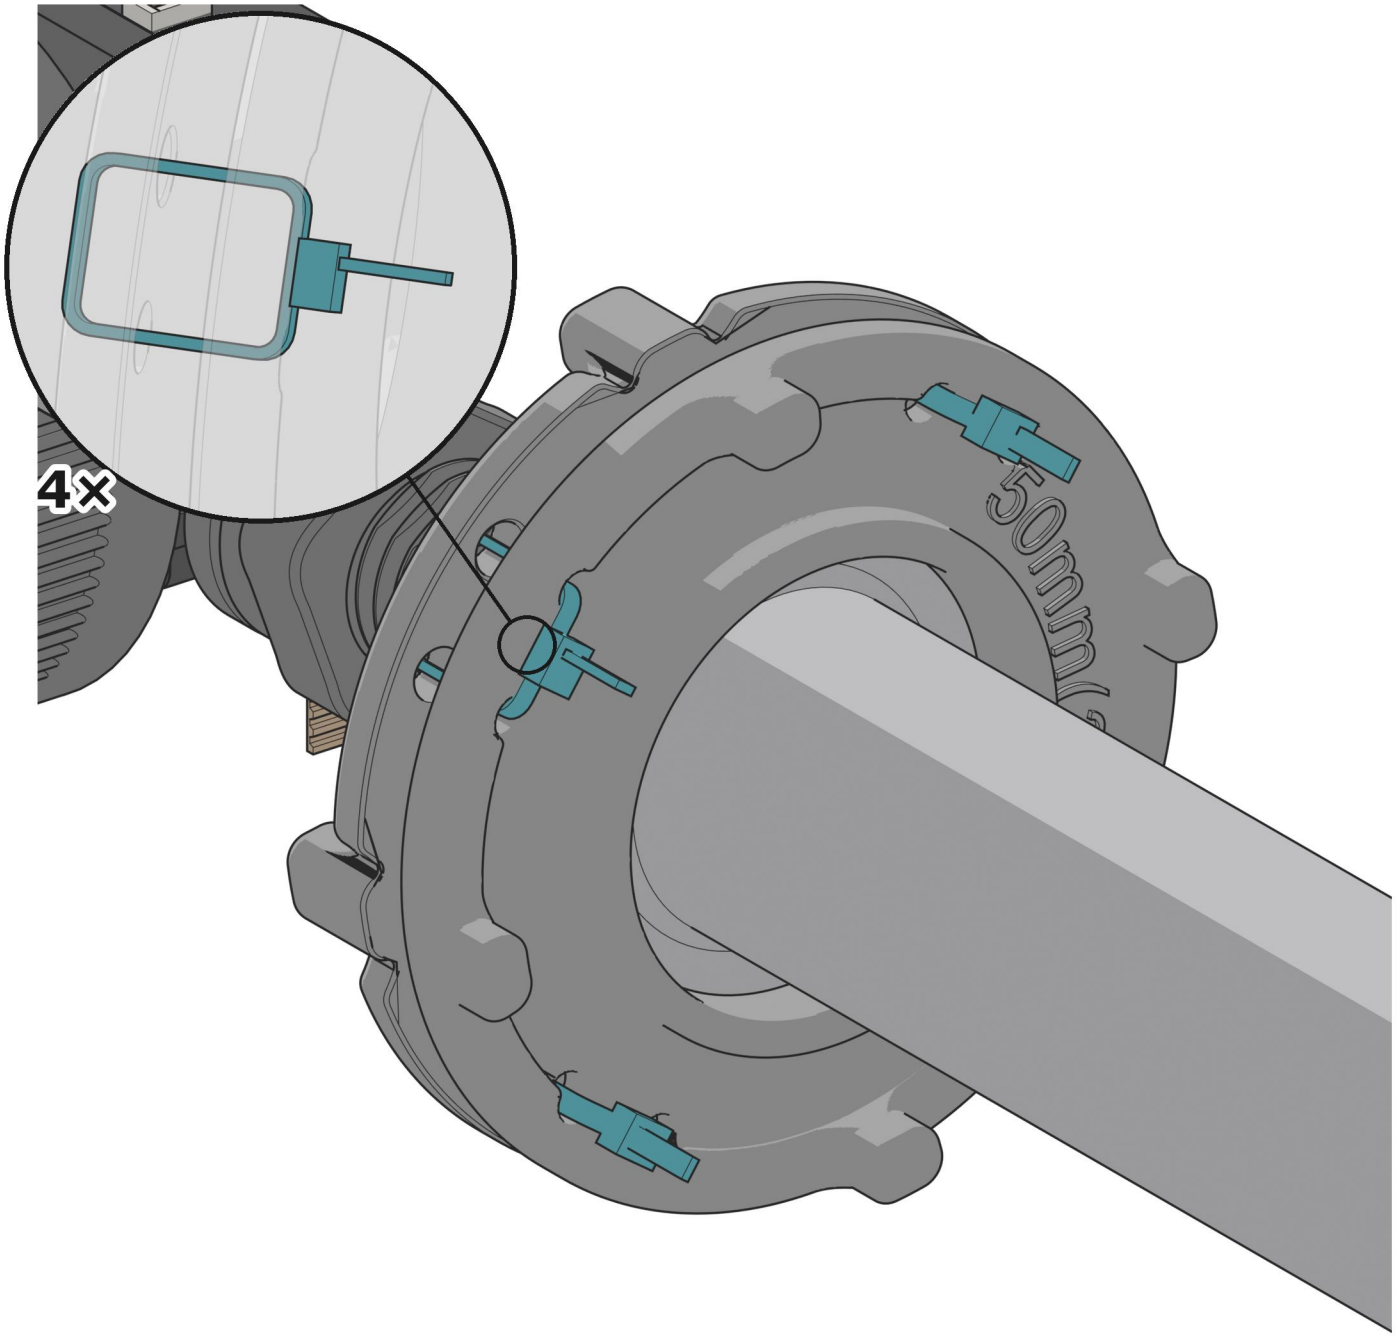


Pull each tie tight and cut off its tail (cord, tied tight, also works).

5

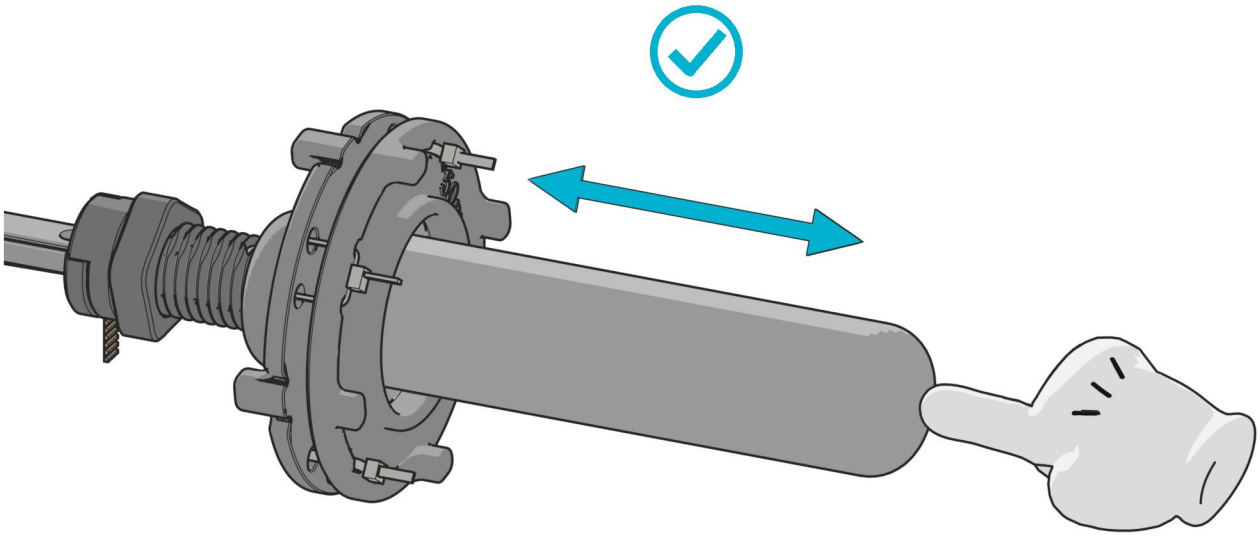


Check it before every use, and again after a few minutes of running.

2 Vac-U-Lock

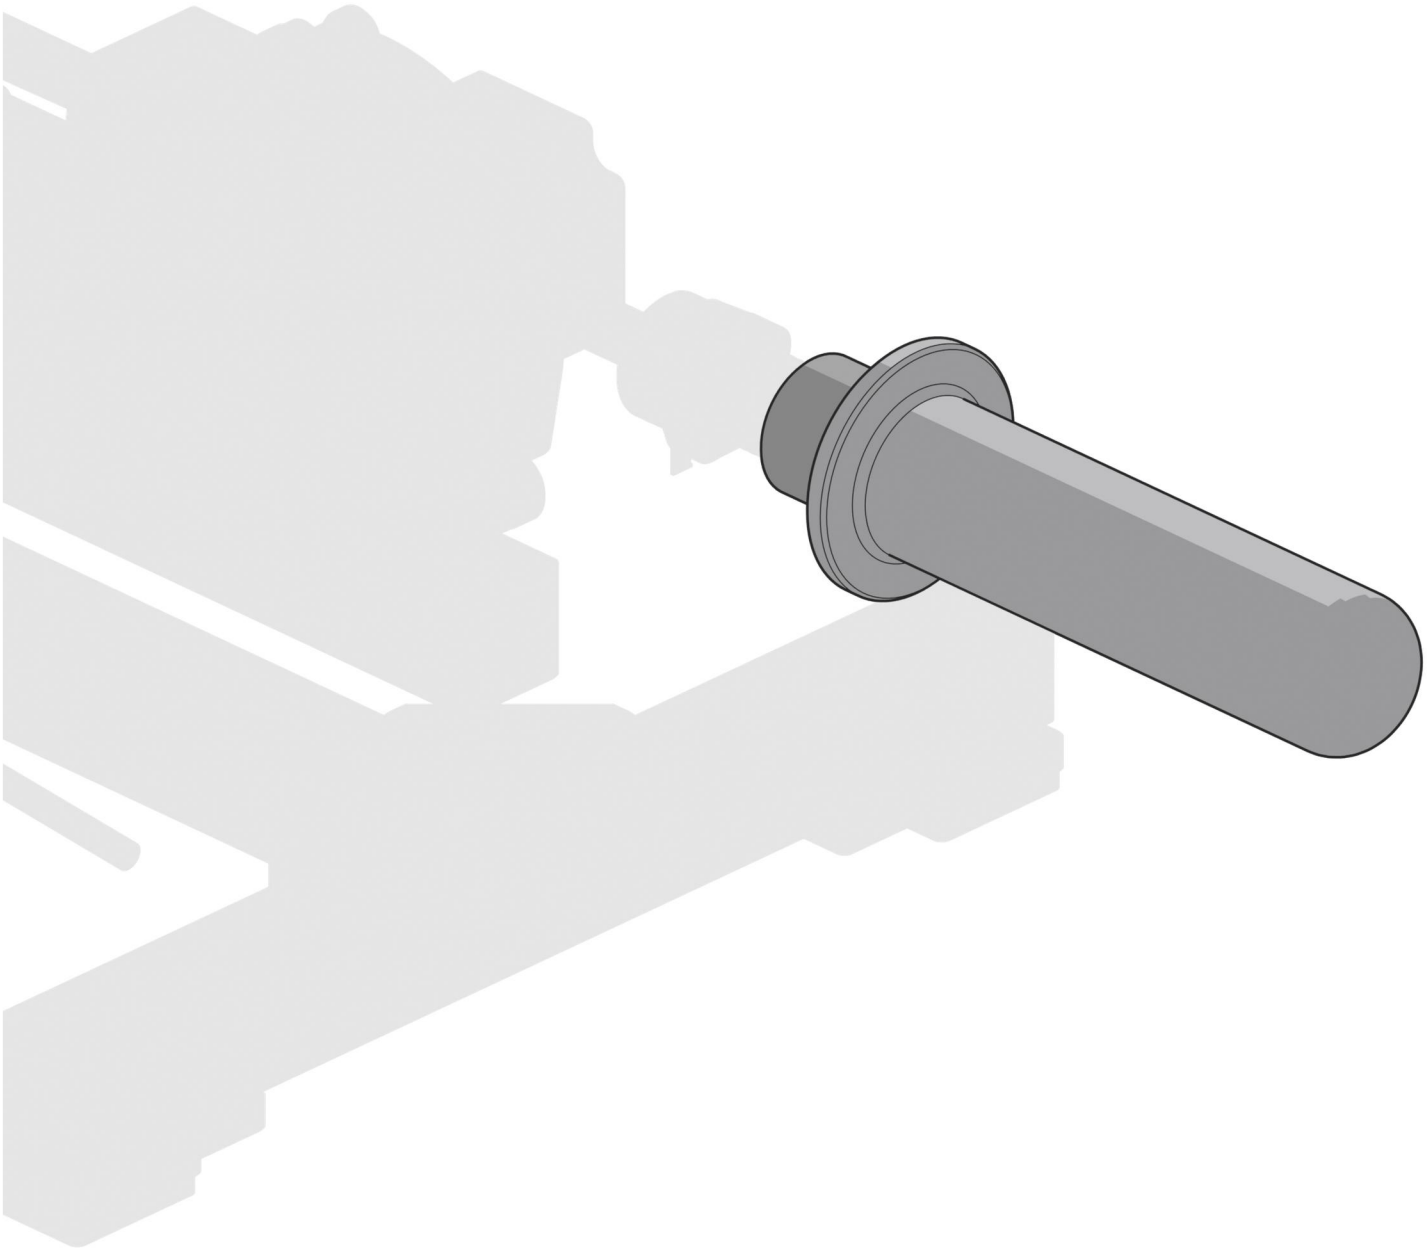


6

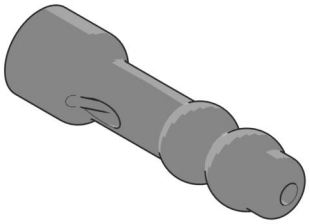


1×

Vac-U-Lock
adapter

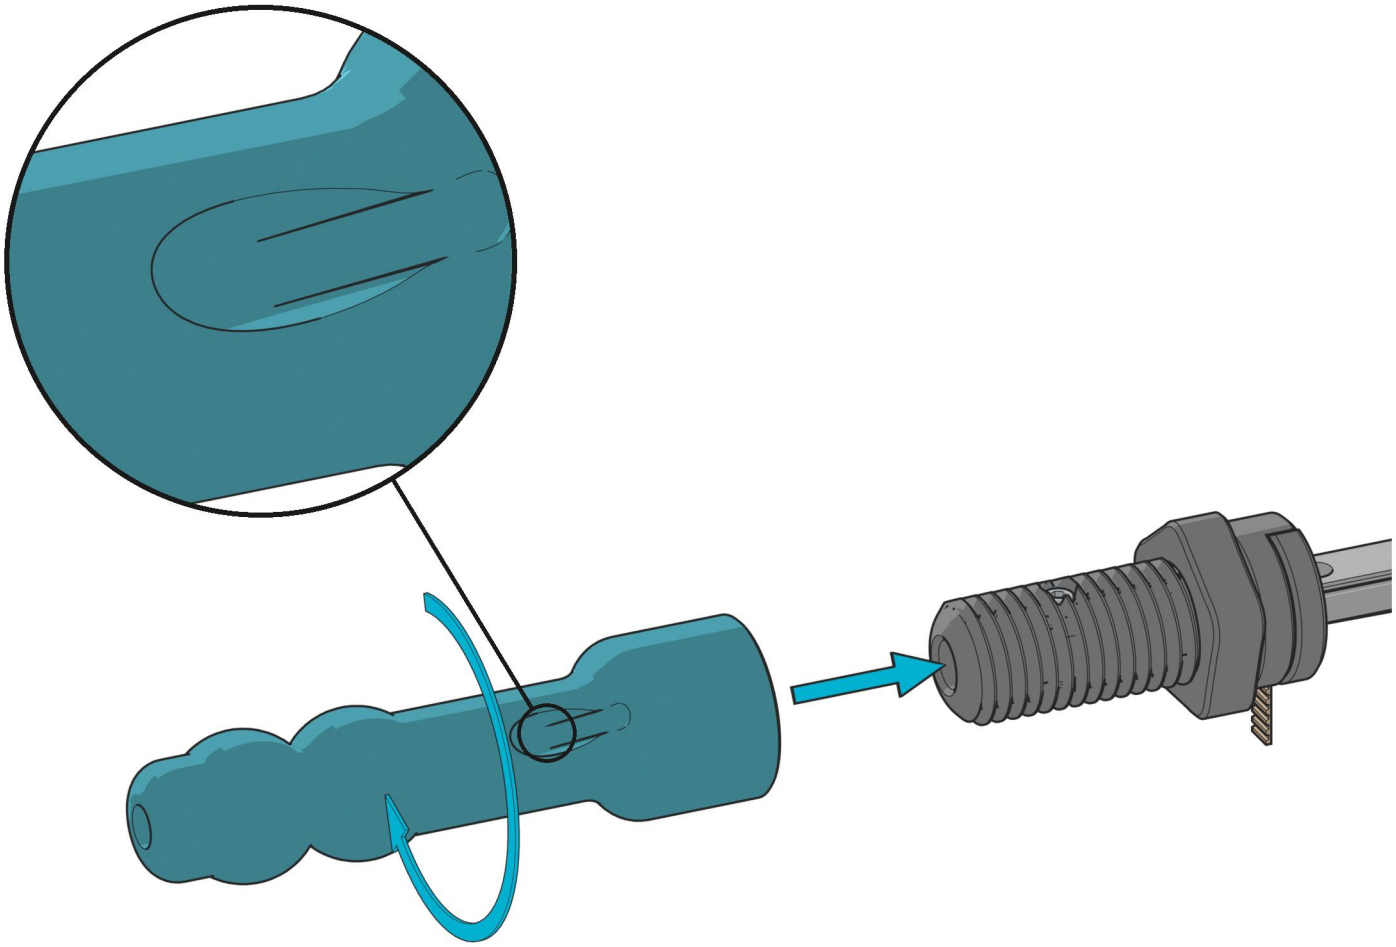


One mount at a time: take the flange plates off first.


7

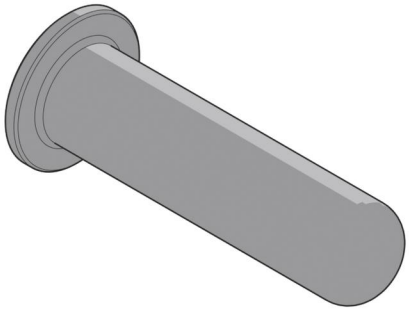

1×


Vac-U-Lock toy

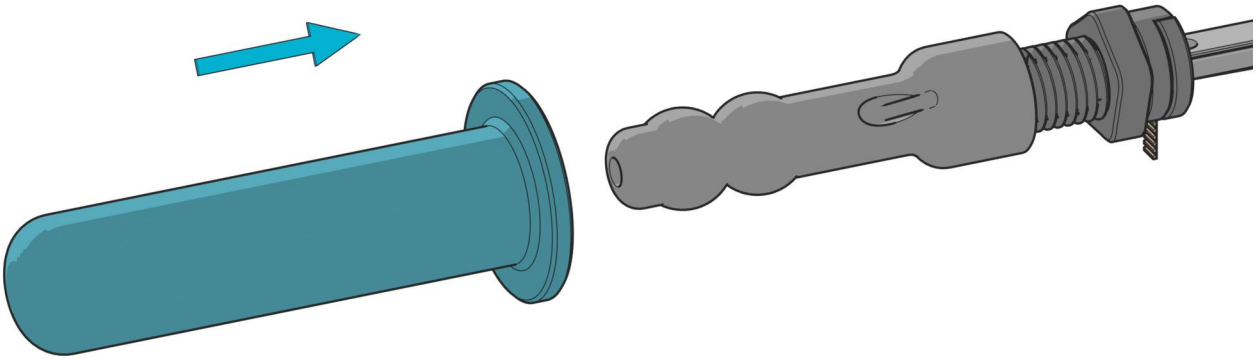

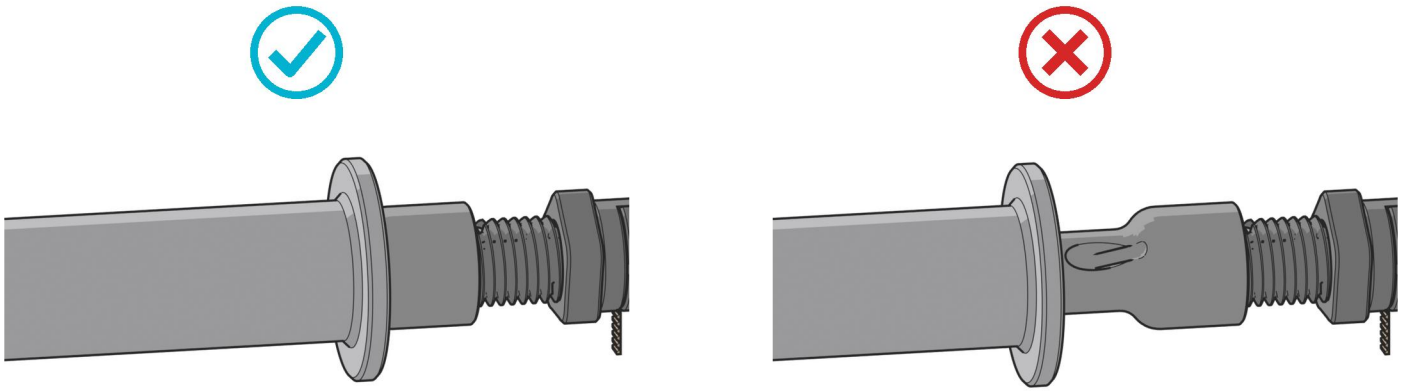


Keep the plug dry (no lube) and press until the toy's base covers the air hole.

8

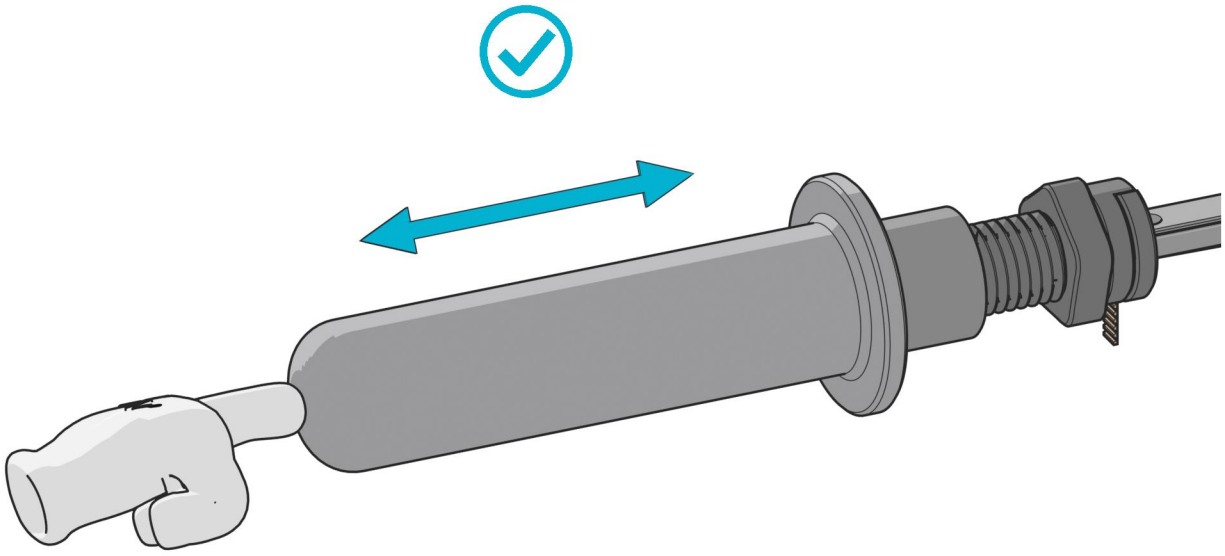

Check it before every use, and again after a few minutes of running.

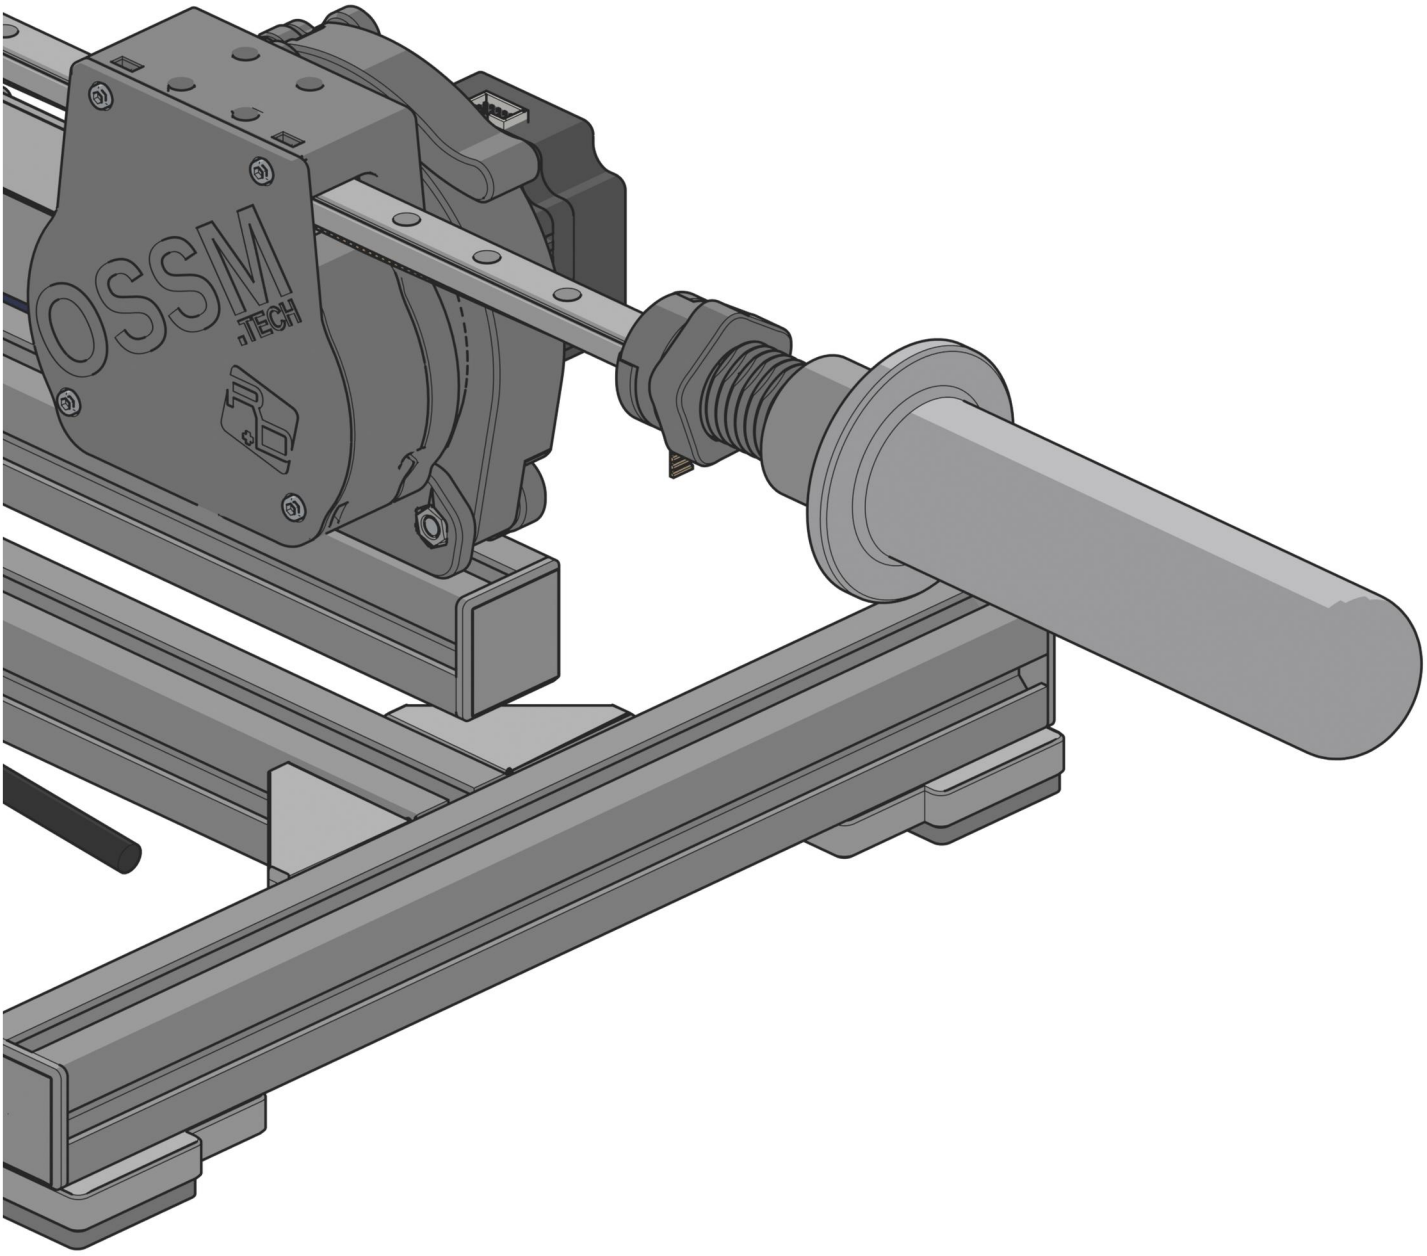

Start slowly. Stop and re-seat the toy if it moves in its mount.

RESEARCH + DESIRE

OSSM Toy Mounting Guide

Flange plates and Vac-U-Lock · Version 1.0.0

Support
support@researchanddesire.com

Assembly instructions
ohai.researchanddesire.com/ossm

Gloved hand: "Low Poly Gloved Hand" by CitrusH (@venture.dalton), CC BY 4.0 (creativecommons.org/licenses/by/4.0), posed and restyled: sketchfab.com/3d-models/low-poly-gloved-hand-1f5b60b45c4a43a0984042e23ced7fc6