




12V to 5V converter

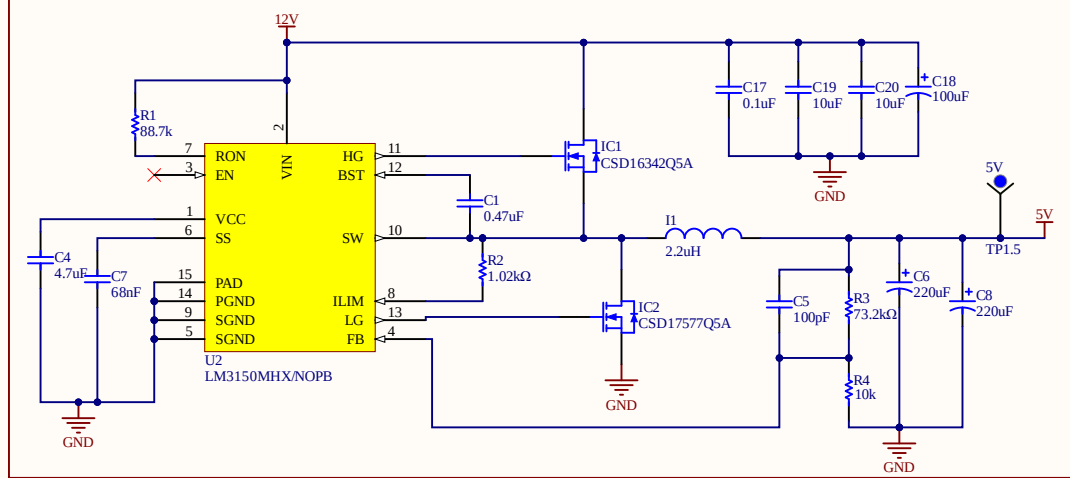



5V to 3.3V converter

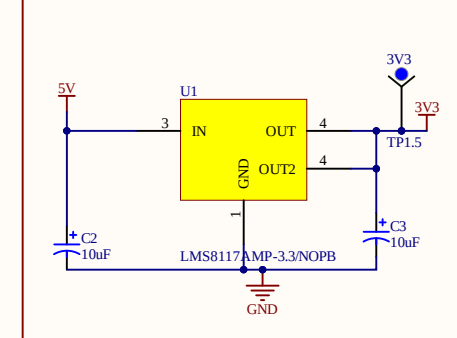


LED Circuit

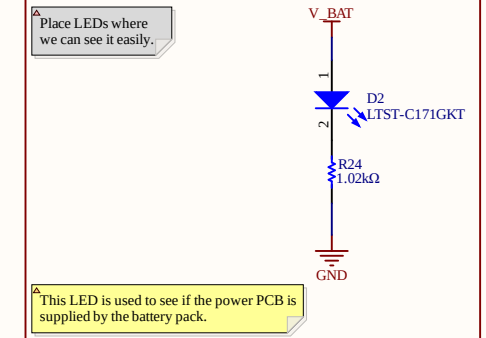


External 12V to 5V converter connectors

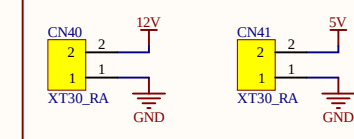


Fan loadswitch

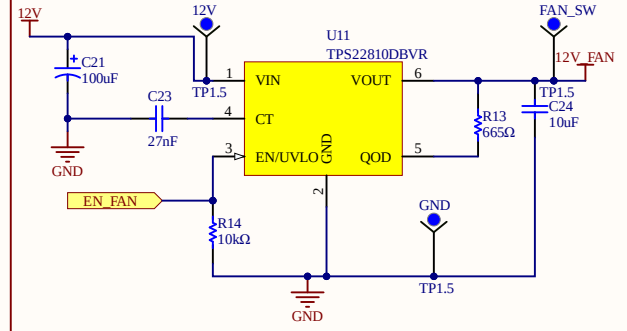

I2C loadswitch

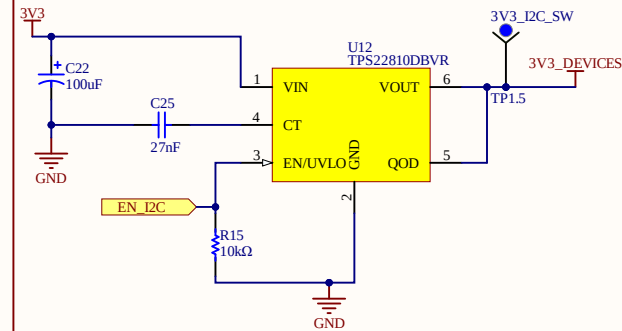


Mounting holes

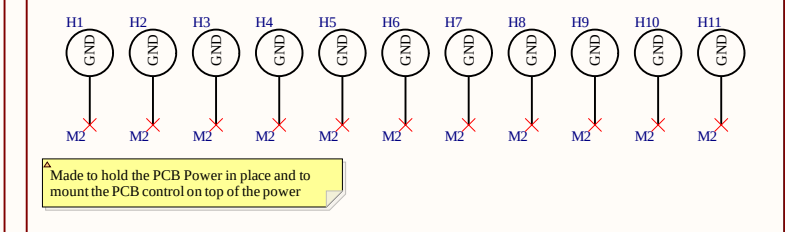


Recommendation :
Follow the layout guidelines recommended by WeBench simulation.
Keep a layout able to dissipate the power of the LDO.

Title		
Size A4	Number	Revision
Date: 8-19-2026	Sheet of	
File: D:\Universitè\...01_Power.SchDoc	Drawn By:	


5V SUPPLY KILLSWITCH 15A

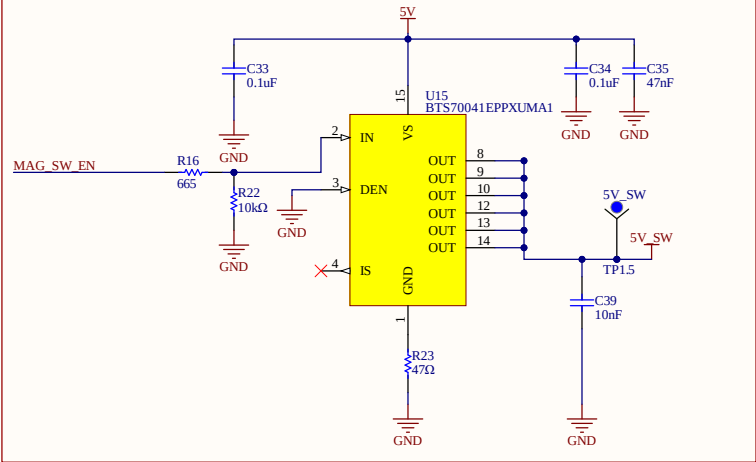

KILLSWITCH BYPASS JUMPERS





MULTIPLE SUPPLY KILLSWITCH 15A

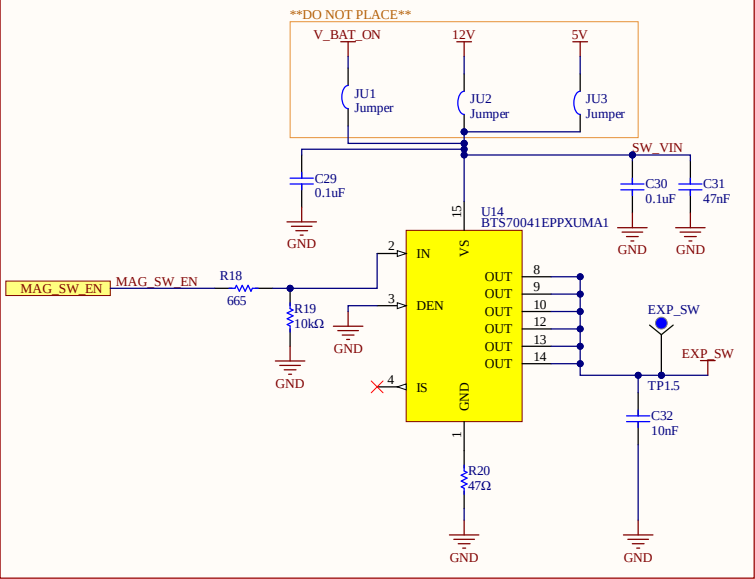


Recommendation :
Follow the layout guidelines recommended by the power switch datasheet for the energy dissipation.
Check the energy that must be dissipated into heat produced by the demagnetization of inductive loads.
In the multiple power supply design, weld only one of the supply to the integrated circuit.

Title		
Size A4	Number	Revision
Date:	8-19-2026	Sheet of
File:	D:\Universit�\02_Killswitch.SchDoc	Drawn By:

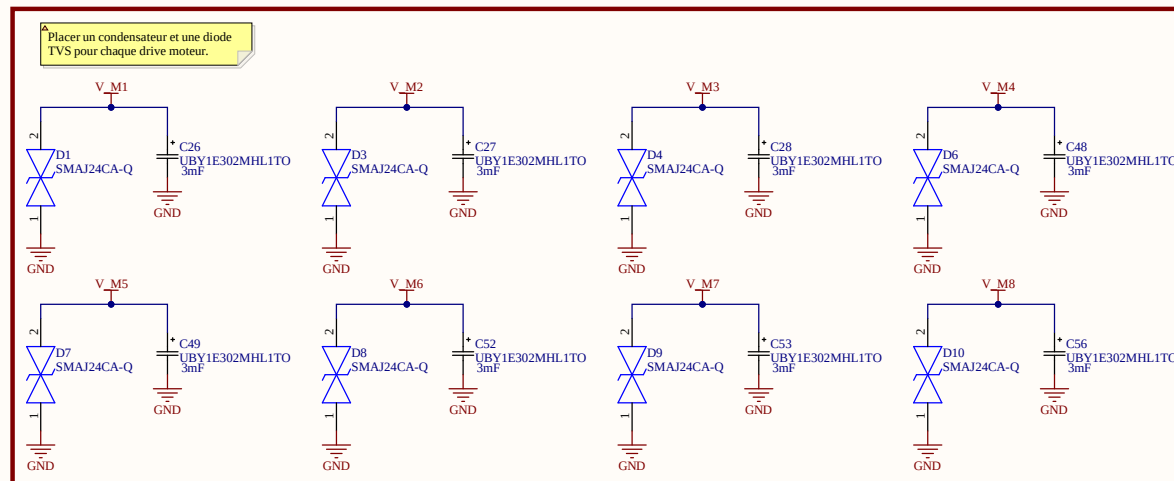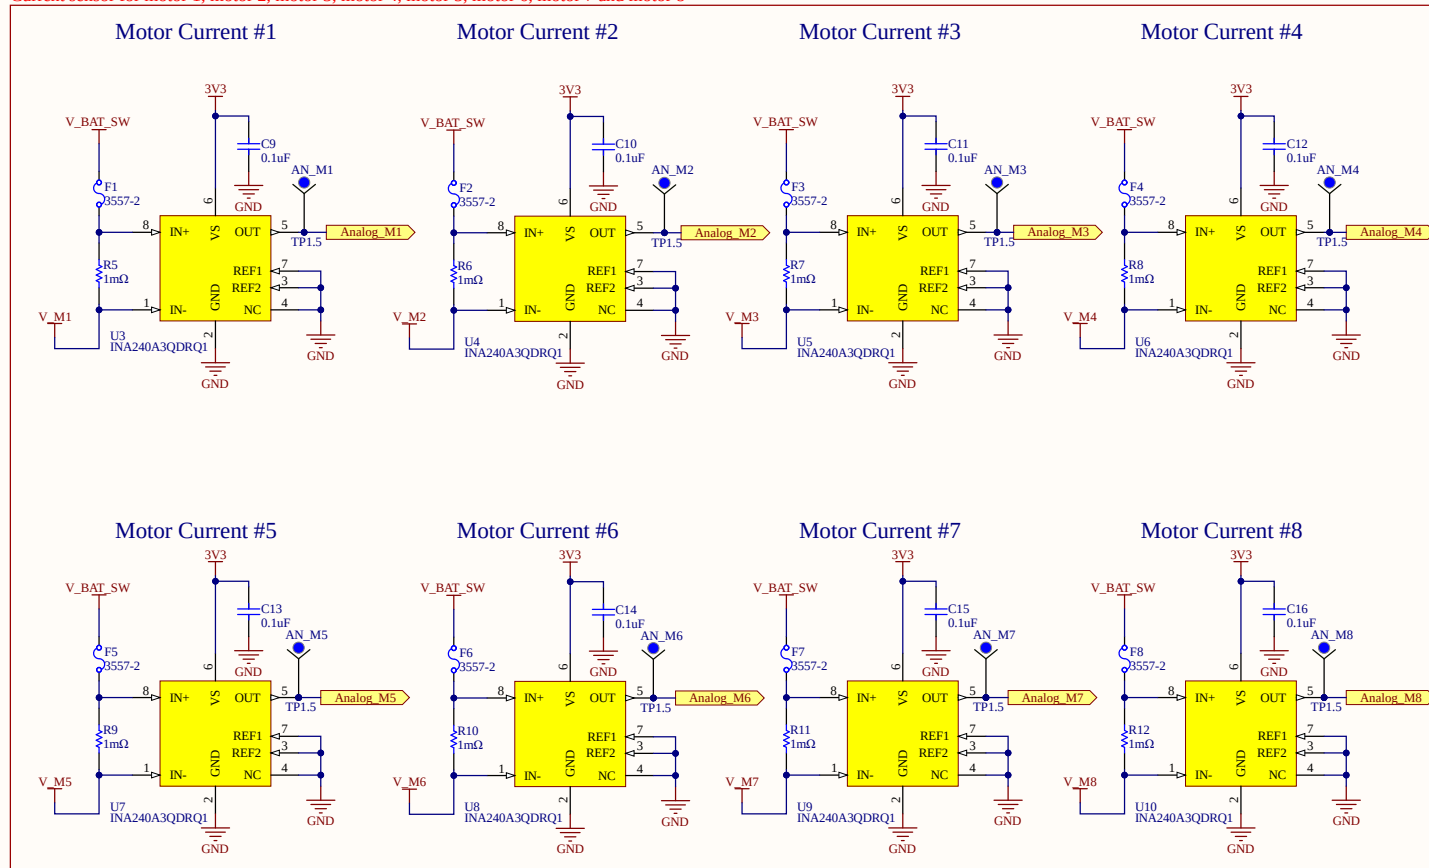

Recommendation :
Follow the layout guidelines recommended by the datasheet.
Place the 0.1μF capacitor as close as possible of the VS pin.

Title		
Size	Number	Revision
A3		
Date:	8-19-2026	Sheet of
File:	D:\Université\03_Current_sensor\Sch	Drawn By:

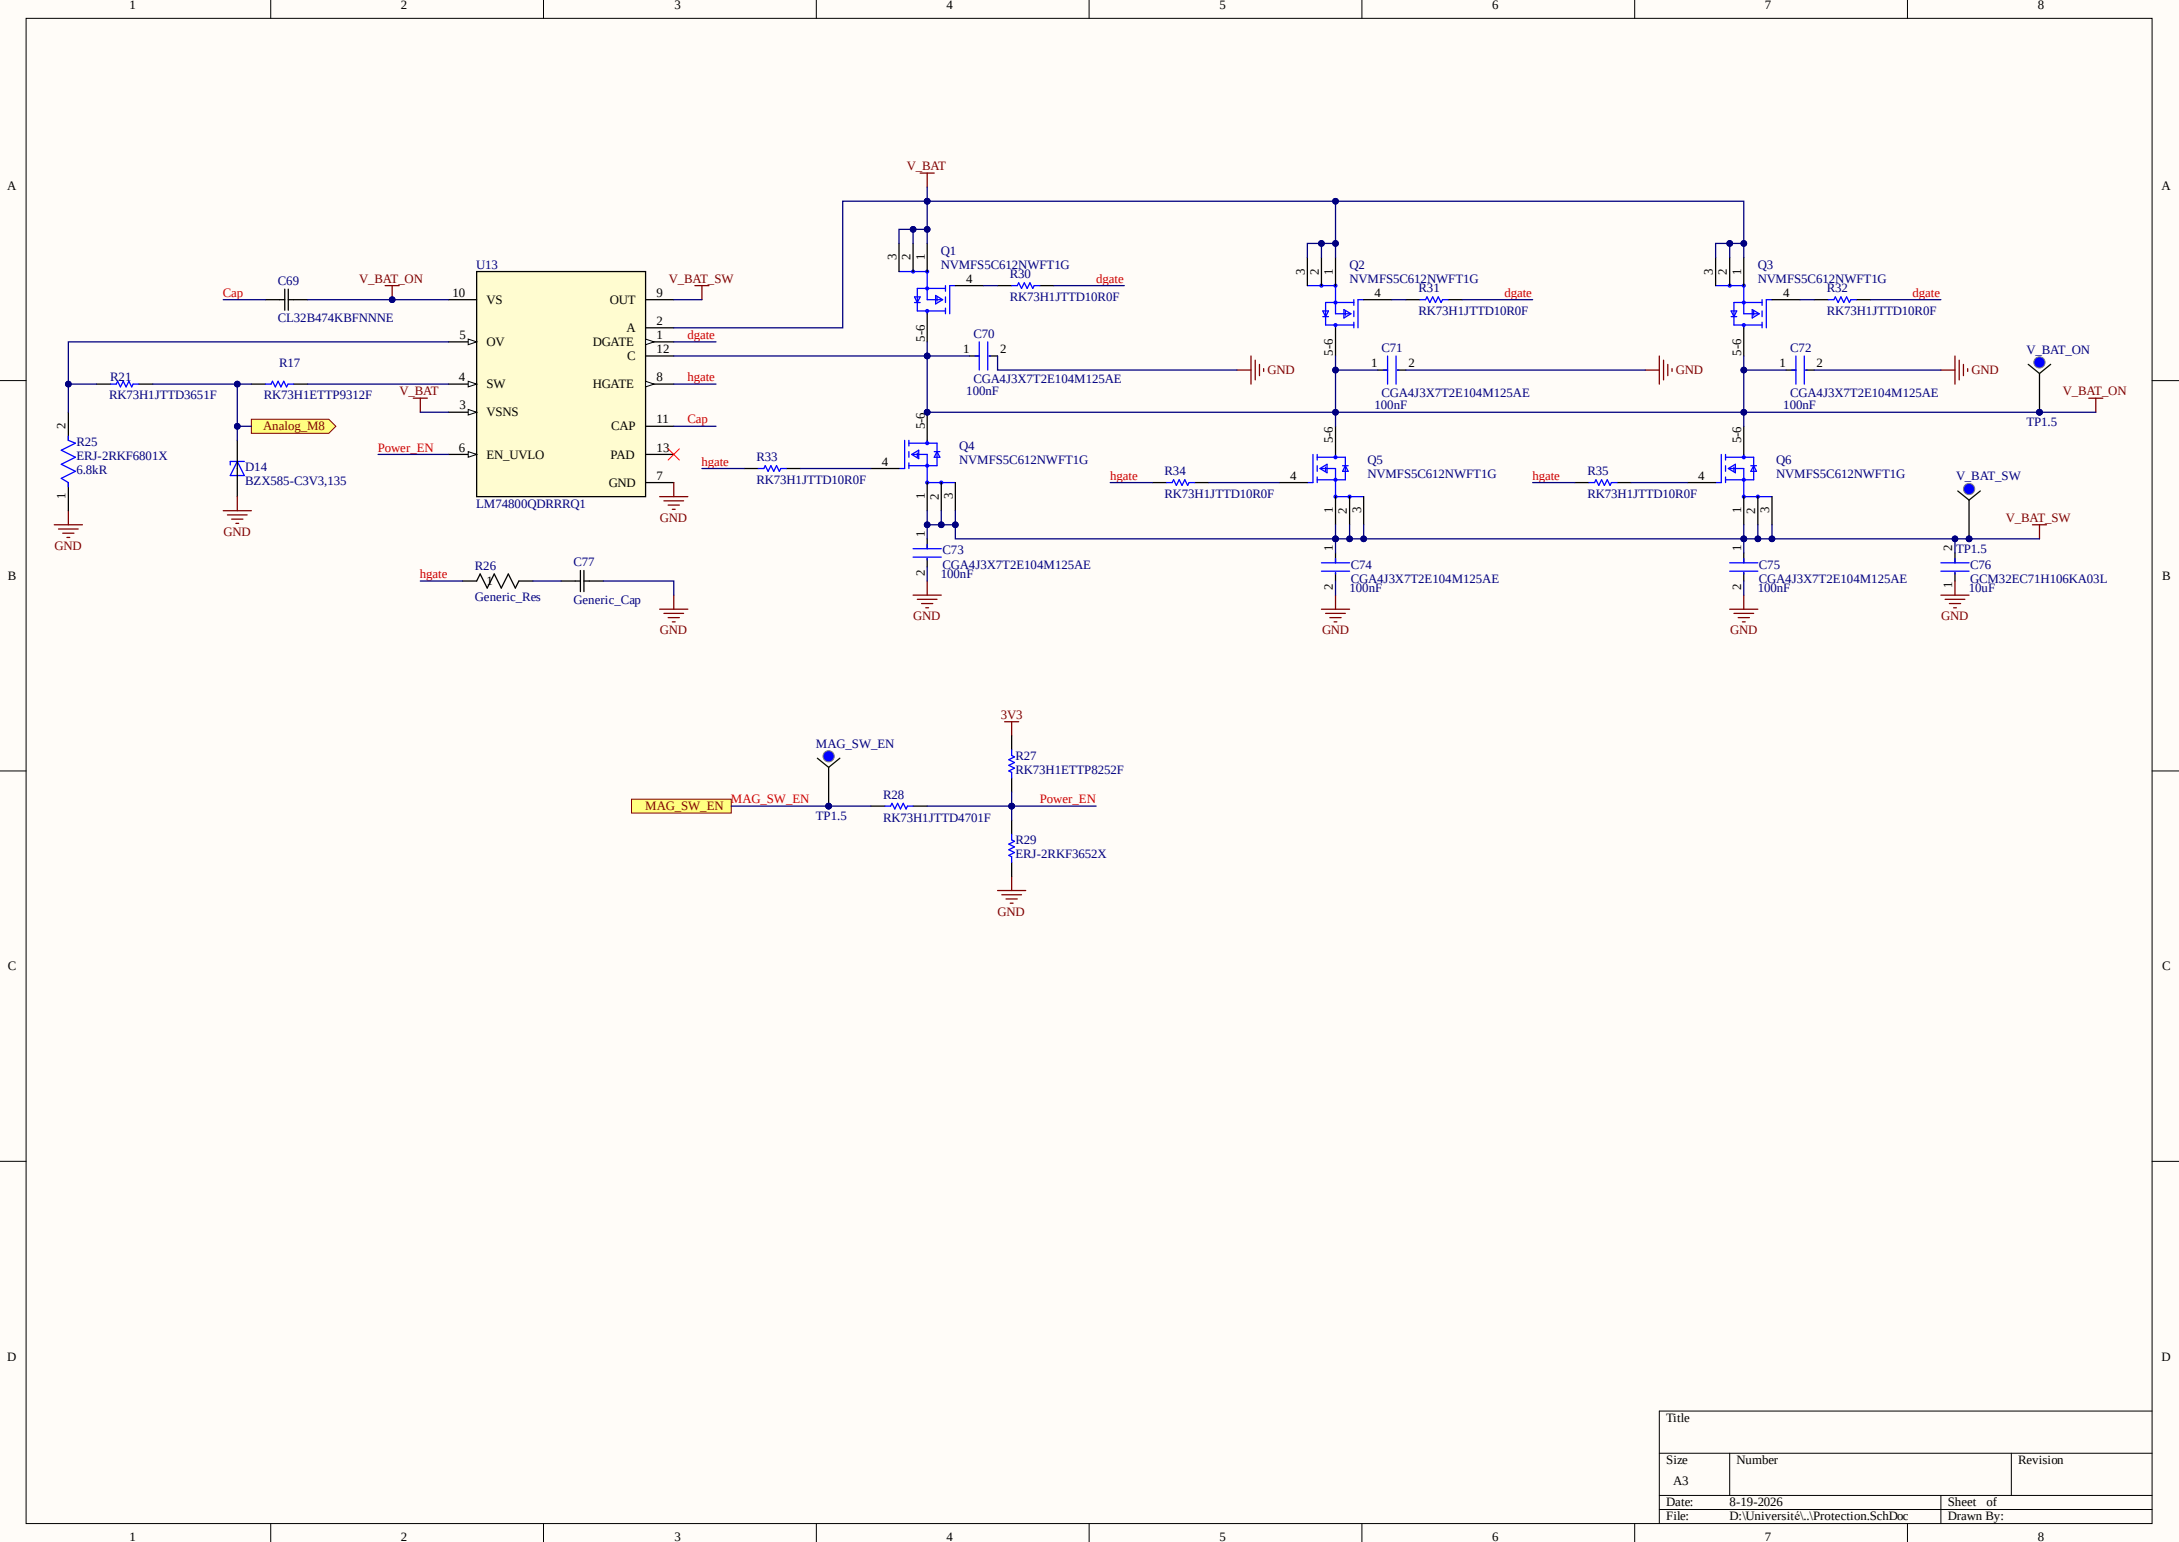

Title		
Size A3	Number	Revision
Date: 8-19-2026		Sheet of
File: D:\Université\...\Protection.SchDoc		Drawn By: