# FILTER-MATE *flow indicator*

**304**

ELEVATION VIEW

1 1/2"
39.3 mm

3"
70.2 mm

2 1/2"
59.9 mm

PLAN VIEW

usgpm
4 5 6 7 8
FLOW
www.specified.ca
lpm
15 20 25 30
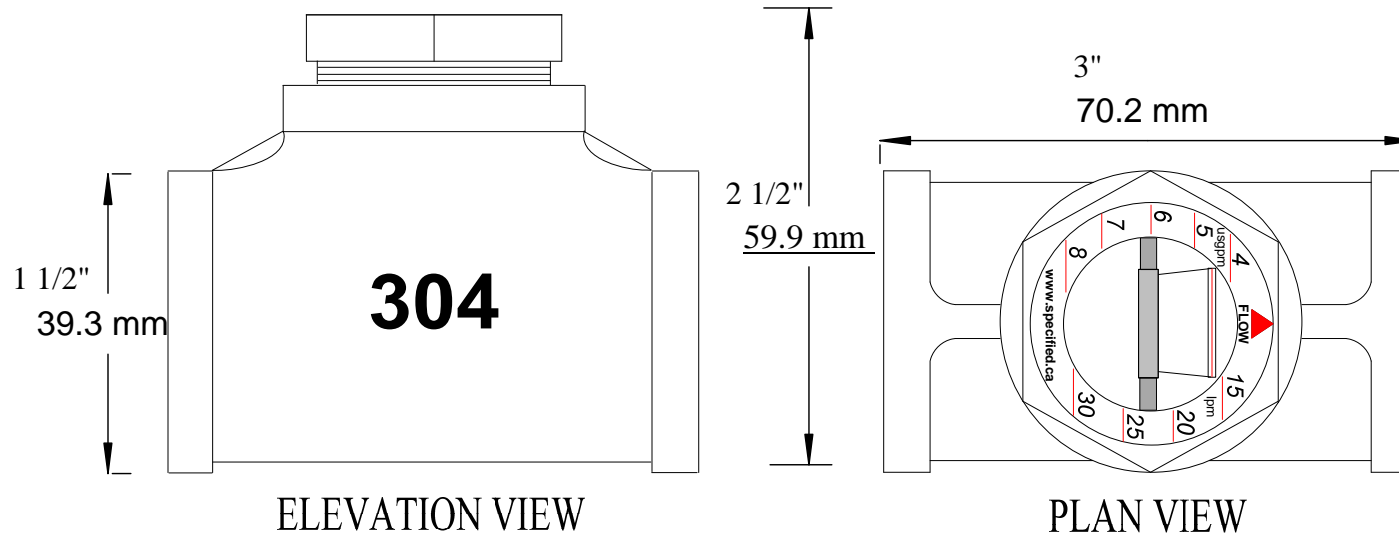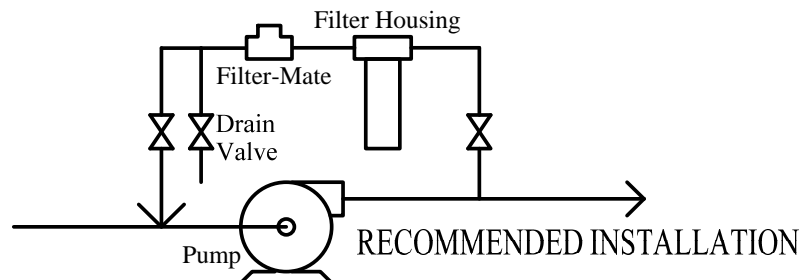
## FEATURES:

304 Stainless Steel body and internals.
Metric and U.S. scales.(15-30 lpm & 4-8 gpm).
S.S. return spring.
Fused glass window.

## BENEFITS:

Corrosion free service.
Maximum flow can be set to cartridge manufacturers
recommendations eliminating media separation.
Can be installed vertically or horizontally.
No gaskets to leak.

| Model | Size N.P.T | usgpm / lpm | P.S.I. / kPa | Max. Temp | Body Mat. | Cap Mat. | Int. Mat | Accuracy |
|---|---|---|---|---|---|---|---|---|
| Filter-Mate 3/4 | 3/4" - 20mm | 4-8 / 15-30 | 150 / 1082 | 212F / 100C | 304 S.S. | Plated Steel | Nylon / S.S. | +-10% |
| Filter-Mate 1 | 1" - 25mm | 7-11 / 28-42 | 150 / 1082 | 212F / 100C | 304 S.S. | Plated Steel | Nylon / S.S. | +-10% |

Filter Housing
Filter-Mate
Drain Valve
Pump
RECOMMENDED INSTALLATION

Revisions

May, 2010

**Specified Technical Sales Ltd.**

Title: **Filter-Mate Flow Indicator**

Drawn by:  Christopher Wedge C.E.T    *Not To Scale*

Date: Aug 04/00          Drawing no. **ED 184**