


FILTER-MATE BRONZE flow indicator

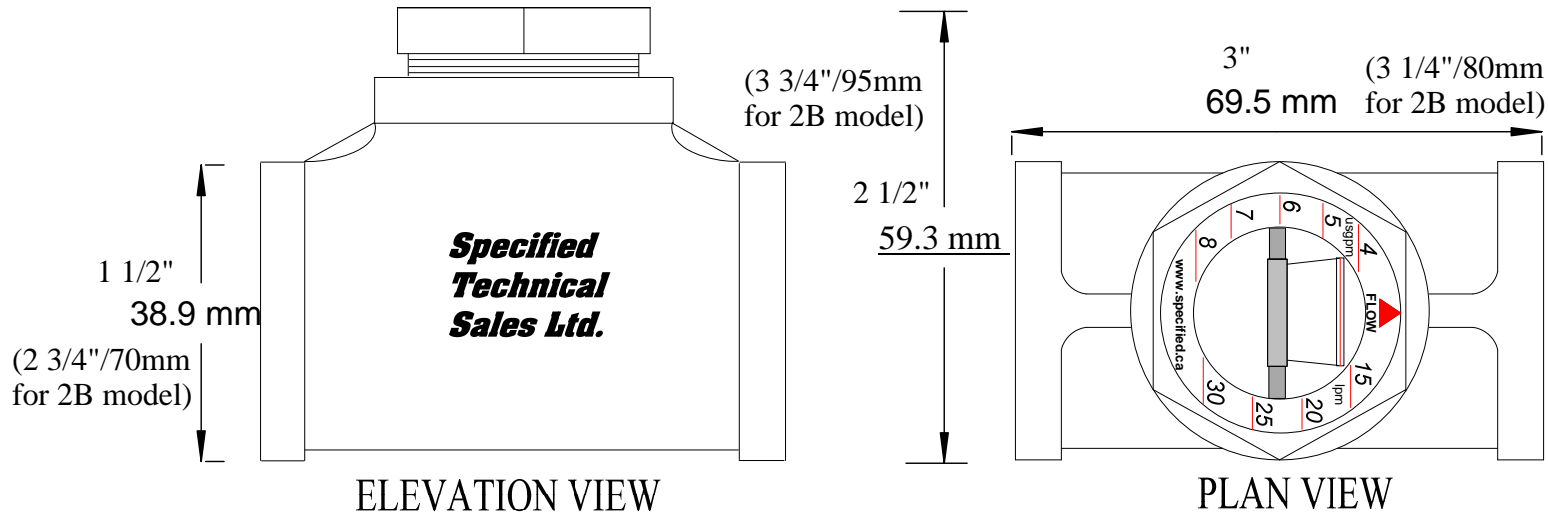


FEATURES:

Bronze body and S.S./ Nylon internals.
Metric and U.S. scales.
S.S. return spring.
Fused glass window.

BENEFITS:

Corrosion free service.
Maximum flow can be set to cartridge manufacturers recommendations eliminating media separation. (metering valve extra)
Can be installed vertically or horizontally.
No gaskets to leak.

<i>Model</i>	<i>Size N.P.T</i>	<i>usgpm / lpm</i>	<i>P.S.I. / kPa</i>	<i>Max. Temp</i>	<i>Body Mat.</i>	<i>Cap Mat.</i>	<i>Int. Mat</i>	<i>Accuracy</i>
Filter-Mate 3/4B	3/4" - 20mm bushings	4-8 / 15-30	150 / 1082	212F / 100C	Bronze	Plated Steel	Nylon / S.S.	+/-10%
Filter-Mate 1B	1" - 25mm	7-11 / 28-42	150 / 1082	212F / 100C	Bronze	Plated Steel	Nylon / S.S.	+/-10%
Filter-Mate 2B	2" - 50mm	25-60 / 100-220	150 / 1082	212F / 100C	Bronze	Plated Steel	Nylon / S.S.	+/-10%

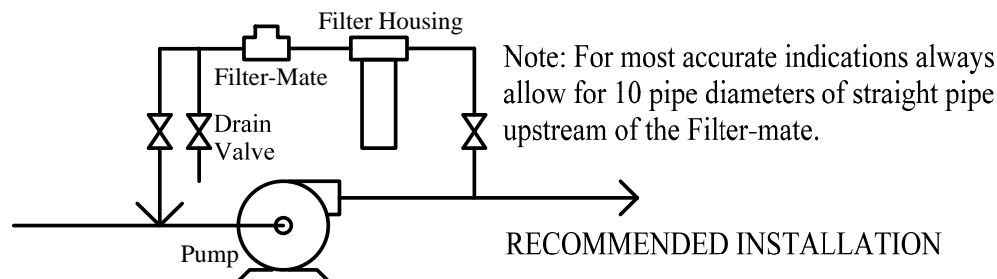

Revisions

May, 2010

Specified Technical Sales Ltd.

Title: **Filter-Mate Flow Indicator
Bronze**

Drawn by: Christopher Wedge C.E.T. Not To Scale

Date: Aug 04/00

Drawing no. **ED 184B**