



Mounting Bracket and Pin wrench Included



-High quality filter housings for high temperature and pressure applications. 99 Degrees Celcius, 2068 kPa (300 psi)

-The housings accept 9 7/8" or 10" cartridges.

-Flowrate: Approx. 8 gpm/cartridge (depending on cartridge selection).

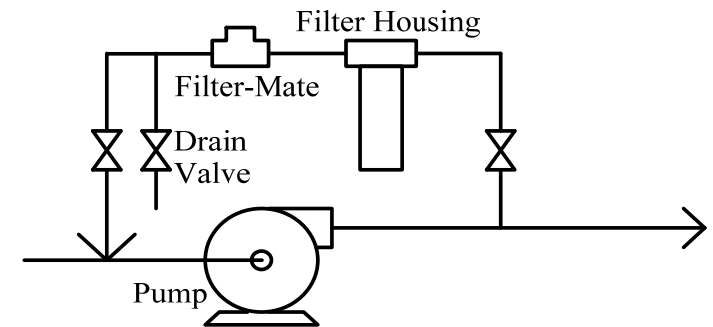

RECOMMENDED INSTALLATION

Model	Description	Connections
PN165 HMS-10A	Stainless Steel, Single Cartridge Length	3/4" FMNPT
PN165 HMS-20A	Stainless Steel, Double Cartridge Length	3/4" FMNPT

Revisions

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**Specified Technical Sales Ltd.**

Title: **Stainless Steel Micron Filter Housing w/ Drain valve**

— 10A  
— 20A

Drawn by: Christopher Wedge C.E.T Not To Scale

Date: Dec.23/2011

Drawing no. **ED 165HMS**