


FILTER-MATE flow indicator

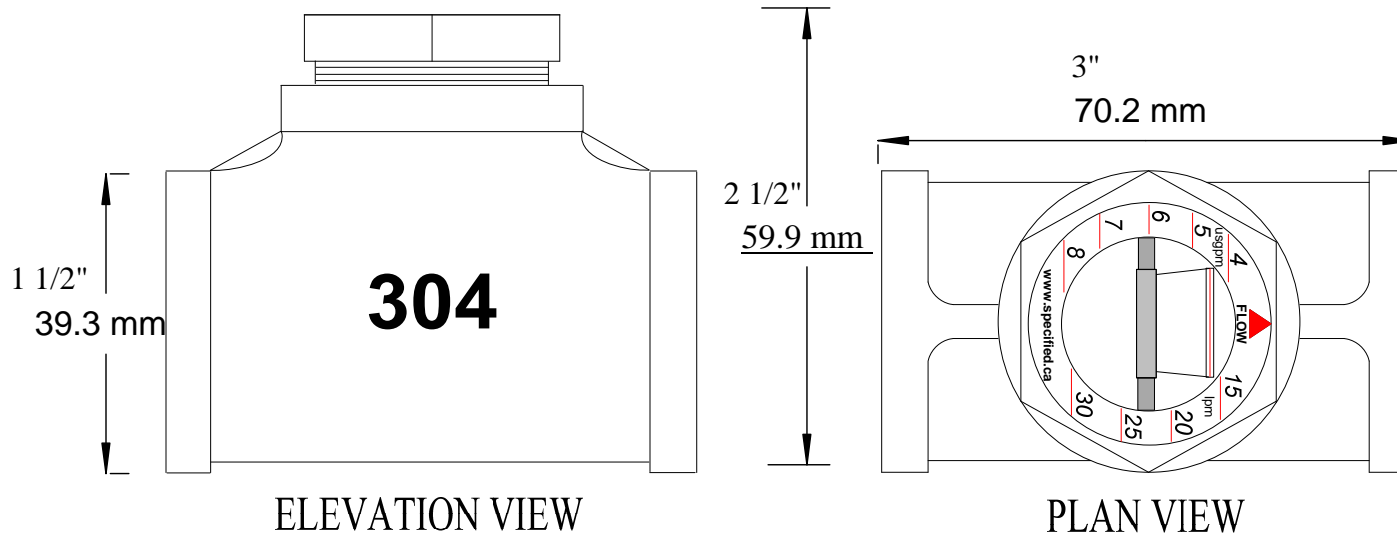


FEATURES:

304 Stainless Steel body and internals.
Metric and U.S. scales.(15-30 lpm & 4-8 gpm).
S.S. return spring.
Fused glass window.

BENEFITS:

Corrosion free service.
Maximum flow can be set to cartridge manufacturers
recommendations eliminating media separation.
Can be installed vertically or horizontally.
No gaskets to leak.

Model	Size N.P.T	usgpm / lpm	P.S.I. / kPa	Max. Temp	Body Mat.	Cap Mat.	Int. Mat	Accuracy
Filter-Mate 3/4	3/4" - 20mm	4-8 / 15-30	150 / 1082	212F / 100C	304 S.S.	Plated Steel	Nylon / S.S.	+-10%
Filter-Mate 1	1" - 25mm	7-11 / 28-42	150 / 1082	212F / 100C	304 S.S.	Plated Steel	Nylon / S.S.	+-10%

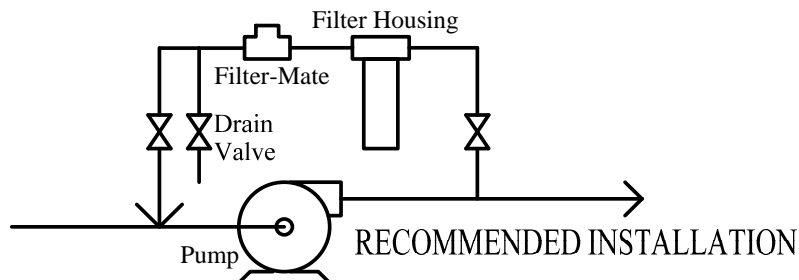

Revisions

May, 2010

Specified Technical Sales Ltd.

Title: **Filter-Mate Flow Indicator**

Drawn by: Christopher Wedge C.E.T Not To Scale

Date: Aug 04/00

Drawing no. **ED 184**