


Mounting Bracket and Pin wrench Included



Max Temp. 99 C

Max Press. 300 PSI (2068 kPa)

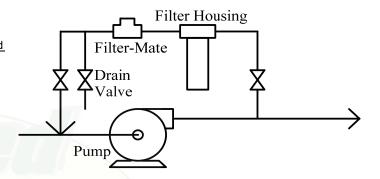

RECOMMENDED INSTALLATION

Model	Description	Connections	Filter Housing Flow Rate	Volume
FHK-10	Stainless Steel, Single Cartridge Length (10")	3/4" (19mm)	1 -10GPM (0-38LPM)	0.4US Gall. (1.5 L)
FHK-20	Stainless Steel, Double Cartridge Length (20")	3/4" (19mm)	10-20GPM (38-76LPM)	0.8US Gall. (3.0 L)

Kits Include:

FHK-20

- 3 2" Nipples
- 2 3/4" Brass Ball Valves
- 1 3/4" Filtermate Flow Indicator
- 1- 20" Stainless Steel Filter Housing

Filter Cartridge

FHK-10

- 3 2" Nipples
- 2 3/4" Brass Ball Valves
- 1 3/4" Filtermate Flow Indicator
- 1- 10" Stainless Steel Filter Housing

Filter Cartridge

	Specified Technical Sales Ltd				
Revisions	Title: STS Stainless Steel Micron				
	F-14 11 · 1/14				

Filter Housing Kit

FHK-10 __ FHK-20

Drawn by: Judith Vergara

Not To Scale

Date: May 30/2016

Drawing no. **ED 165-FHK**