







UM670H Series

Design	Stand Type	65": 1 pole (Fixed) 55" / 50" / 43": 1 pole (Swivel)
Display	Sizes	65" / 55" / 50" / 43"
Display	Resolution	3,840 × 2,160 (4K UHD)
Broadcasting	Digital	ATSC, Clear QAM
System	Analog	NTSC
VESA	65" / 55": 300 × 50" / 43": 200 ×	



Pro:Centric Smart Platform

LG's Pro:Centric Smart HTML global platform hosts system integrator partners' in-room entertainment applications with proven backward compatibility across multiple generations of webOS smart TVs. It offers one of the widest possible choices of interactive systems to our hospitality customers. Through the Pro:Centric middleware API and chromium browser, partner applications can control all aspects of the LG smart television to provide a completely unique, customizable branded user experience for hotel guests encompassing entertainment, interactive features, streaming services and digital compendiums.



Pro:Centric Direct Hotel Management Solution from LG

The Pro:Centric Direct hotel content management solution offers simple editing tools, making it easy to perform service and IP network-based remote management with a single click. Pro:Centric Direct enables users to customize their interface easily and efficiently manage all TVs in the facility. The most recent version* provides IoT-based in-room control as well as voice control through LG Natural Language Processing.

* Some features may not be supported based on PCD versions.



Pro:Idiom

DRM (digital rights management) technology unlocks access to premium content to help assure rapid and broad deployment of HDTV and other high-value digital content. DRM technology also prevents any illegal copying of content.



Slim Depth for a Sleek Look


With a slim design, the UM670H series integrates smoothly with interiors, delivering a modern impression to your guests.



SoftAP

Software-enabled Access Point* (SoftAP) is a virtual Wi-Fi feature that uses TV as a wireless hotspot, enabling guests to connect their own devices to the SoftAP.

* Screen Share may not be operated at the same time.

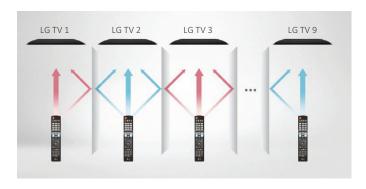

Multi-code IR

Multi-code IR* function eliminates any remote-control signal interaction between multiple TVs in one place. LG hospital TV supports this when used with the Multi-code IR remote control, so users can freely control their own TVs without disturbing the others.

* Multi-code IR remote control is not provided by LG. (sold separately)



Kensington Lock Slot



Reinforced Metal Stand



Lock Down Plate with Credenza Aperture


Physical Security Features (55", 50" and 43" only)

Select LG Hotel TVs are protected by the reliable Kensington Lock solution (lock sold separately). They also come with a metal-reinforced stand to improve sturdiness, durability and safety. Finally these models include a lock-down plate with credenza aperture to lock the TV firmly to the credenza for added security.

* Magic Motion Remote is required (sold separately)

CONNECTIVITY 65" / 55" / 50" / 43"


Rear

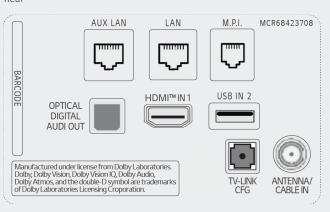

Side



TECHNICAL DRAWINGS

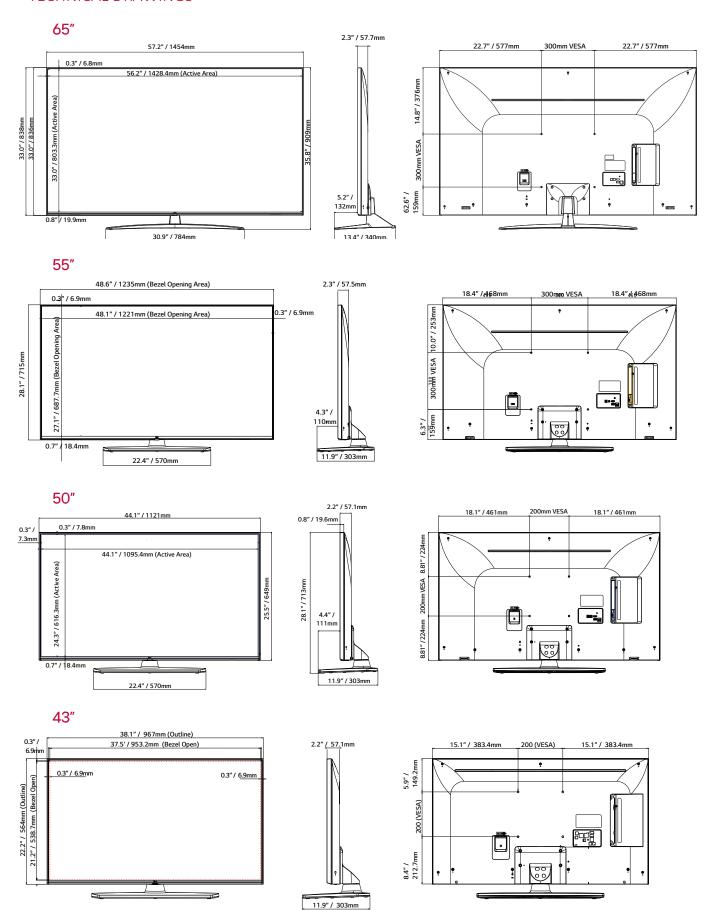

C .					
Category	Category	Pro:Centric Smart	Pro:Centric Smart	Pro:Centric Smart	Pro:Centric Smart
Display	Diagonal	65"	55"	50"	43"
	Resolution	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)
	Backlight Cabinet Type	Direct	Direct	Direct	Direct
	Brightness	330 nits	330 nits	330 nits	265 nits
	Dynamic Contrast Ratio	1,000,000:1	1,000,000:1	1,000,000:1	1,000,000:1
	Static (Panel) Contrast Ratio	1,200:1	1,300:1	5,000:1	1,200:1
	Response Time	8 ms (G to G)	14 ms (G to G)	19 ms (G to G)	8 ms (G to G)
	Refresh Rate	60 Hz	60 Hz	60 Hz	60 Hz
	Life Span	30,000 Hrs.	30,000 Hrs.	30,000 Hrs.	30,000 Hrs.
Video	Al Picture Pro	Yes	Yes	Yes	Yes
	Dynamic Vivid	Yes	Yes	Yes	Yes
	HDR 10 Pro / HDR HLG	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes
	Game Optimizer	Yes	Yes	Yes	Yes
	Speaker (Sound Output)	10 W + 10 W	10 W + 10 W	10 W + 10 W	10 W + 10 W
Audio	Speaker System	2.0 ch	2.0 ch	2.0 ch	2.0 ch
	Al Sound Pro / Al Sound	Yes	Yes	Yes	Yes
	Al Acoustic Tuning	Yes (Ready)	Yes (Ready)	Yes (Ready)	Yes (Ready)
	LG Sound Sync	Optical/Bluetooth wireless	Optical/Bluetooth wireless	Optical/Bluetooth wireless	Optical/Bluetooth wirele
roadcasting	Digital (Terrestrial / Cable / Satellite)	ATSC, Clear QAM	ATSC, Clear QAM	ATSC, Clear QAM	ATSC, Clear QAM
System	Analog (NTSC / SECAM / PAL)	NTSC	NTSC	NTSC	NTSC
	Global IPTV Support	Yes	Yes	Yes	Yes
Hospitality	Solution Type	Pro:Centric (Smart, Direct, V)	Pro:Centric (Smart, Direct, V)	Pro:Centric (Smart, Direct, V)	Pro:Centric (Smart, Direct, V)
Solution					
Smart Features	Mobile Co	SW Clock (World Clock / Alarm), Soft nnection Overlay, HDMI-ARC (HDMI 2)	AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solution	Yes PP Server Compatibility, Magic Remote of the Share, DIAL, Bluetooth Audio Playback on), IoT, EZ-Manager, USB Cloning, Wake (HDMI-CEC) (1.4), IR Out (MPI, RS-232C)	on RF, WOL,
Smart	webOS23 User Interfa Mobile Co Diagnostics (ce, Smart Home (Launcher Bar), Galle SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (N Installer Menu, Lock Mode (Limited), F Speaker Out (R: 1.0 W, E 1), W, 8 Ω), I emote, Moving Picture Playback (SD/HI	ry Mode, Quick Access, Web Browser, SI AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solutio IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imaj Instant On, VLAN ID, RIP (Remote Jack Po D/Plus HD), Auto Off / Sleep Timer, Energ	DP Server Compatibility, Magic Remote of the Share, DIAL, Bluetooth Audio Playback n), IoT, EZ-Manager, USB Cloning, Wake (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) ge), Insert Image, One Channel Map (LCI ack) Compatibility (Teleadapt/Guestlink gy Saving Mode, Motion Eye Care, b-LAR	Compatibility (MR18HA), ;; on RF, WOL, , Multi-code IR
Smart Features Hospitality	webOS23 User Interfa Mobile Co Diagnostics (ce, Smart Home (Launcher Bar), Galle SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (N Installer Menu, Lock Mode (Limited), F Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), I emote, Moving Picture Playback (SD/HI Anti-theft System (Kensington L	ry Mode, Quick Access, Web Browser, St AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solution IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imagnstant On, VLAN ID, RIP (Remote Jack Pa DyPlus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Exceptions)	DP Server Compatibility, Magic Remote of the Share, DIAL, Bluetooth Audio Playback n), IoT, EZ-Manager, USB Cloning, Wake (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) ge), Insert Image, One Channel Map (LCI ack) Compatibility (Teleadapt/Guestlink gy Saving Mode, Motion Eye Care, b-LAR	Compatibility (MR18HA), ,, ,on RF, WOL, , Multi-code IR M) (HDMI-CEC), N embedded
Smart Features Hospitality	webOS23 User Interfa Mobile Co Diagnostics i External : Mobile Re	ce, Smart Home (Launcher Bar), Galle SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (N Installer Menu, Lock Mode (Limited), F Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), I emote, Moving Picture Playback (SD/HI Anti-theft System (Kensington L	ry Mode, Quick Access, Web Browser, SI AP, Wi-Fi, Screen Share (Miracast), Smar, Voice Recognition (Standalone/Solutio IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imagnstant On, VLAN ID, RJP (Remote Jack Pa)/Plus HD), Auto Off / Sleep Timer, Ener, ock, Credenza/Security Aperture (Except B In (2.0), RS-232C In (3.5 mm TRRS), Spot IDMI In (2.0), USB In (2.0), Antenna/Cabi	DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback n), IoT, EZ-Manager, USB Cloning, Wake (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) ge), Insert Image, One Channel Map (LCI ack) Compatibility (Teleadapt/Guestlink gy Saving Mode, Motion Eye Care, b-LAI t 65"), Lock Down Plate (Except 65") eaker Out/Line Out (3.5 mm Stereo), Sere In (Dual b-LAN), Optical Digital Audio O	Compatibility (MR18HA), ; on RF, WOL, , Multi-code IR W) (HDMI-CEC), N embedded vice Only (3.5 mm TRS)
Smart Features Hospitality Features	webOS23 User Interfa Mobile Co Diagnostics I External : Mobile Re Set Side Set Rear	ce, Smart Home (Launcher Bar), Galle SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (N Installer Menu, Lock Mode (Limited), F Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), I emote, Moving Picture Playback (SD/HI Anti-theft System (Kensington L HDMI In x2 (2.0), US	ry Mode, Quick Access, Web Browser, SI AP, Wi-Fi, Screen Share (Miracast), Smar, A Voice Recognition (Standalone/Solution IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imag Instant On, VLAN ID, RIP (Remote Jack P. DyPlus HD), Auto Off / Sleep Timer, Energ Jock, Credenza/Security Aperture (Except B In (2.0), RS-232C In (3.5 mm TRRS), Spo JOMI In (2.0), USB In (2.0), Antenna/Cabl J-Link CFG (3.5 mm TRS) (b-LAN Service)	DP Server Compatibility, Magic Remote of the Share, DIAL, Bluetooth Audio Playback n), IoT, EZ-Manager, USB Cloning, Wake (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) ge), Insert Image, One Channel Map (LCI ack) Compatibility (Teleadapt/Guestlink gy Saving Mode, Motion Eye Care, b-LAR t 65"), Lock Down Plate (Except 65") eaker Out/Line Out (3.5 mm Stereo), Ser e In (Dual b-LAN), Optical Digital Audio (LAN (RJ45), Aux LAN (RJ45), MPI Port (R	Compatibility (MR18HA), ,, on RF, WOL, , Multi-code IR M) (HDMI-CEC), N embedded vice Only (3.5 mm TRS)
Smart Features Hospitality Features	webOS23 User Interfa Mobile Co Diagnostics I External : Mobile Re Set Side Set Rear VESA Compatible	ce, Smart Home (Launcher Bar), Galle SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), F Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), I emote, Moving Picture Playback (SD/HI Anti-theft System (Kensington L HDMI In x2 (2.0), US	ry Mode, Quick Access, Web Browser, SI AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solution IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imagnstant On, VLAN ID, RIP (Remote Jack P. DyPlus HD), Auto Off / Sleep Timer, Enerpock, Credenza/Security Aperture (Exception (2.0), RS-232C In (3.5 mm TRRS), Spuil (2.0), RS-232C In (3.5 mm TRRS), Spuil (2.0), Landalone (2.0), Antenna/Cable (1.1), Landalone (2.0), Miracastone (2.0), Antenna/Cable (2.0), Antenna/C	DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback (HDMI-CEC) (1.4), IR Out (MP), RS-232C) (1.4), Lock Down Plate (Except 65"), Lock Down	Compatibility (MR18HA), ,, ,on RF, WOL, , Multi-code IR M) (HDMI-CEC), N embedded vice Only (3.5 mm TRS) Dut, 200 × 200 mm
Smart Features Hospitality Features	webOS23 User Interfa Mobile Co Diagnostics I External : Mobile Re Set Side Set Rear VESA Compatible Stand Type	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Minstaller Menu, Lock Mode (Limited), Fispeaker Out (R: 1.0 W, L: 1.0 W, 8 Q), Ismote, Moving Picture Playback (SD/HI Anti-theft System (Kensington Limited), HDMI In x2 (2.0), US	ry Mode, Quick Access, Web Browser, St AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solution IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imagnistant On, VLAN ID, RIP (Remote Jack PapyPlus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Exception of the Company of the Compa	DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback (HDMI-CEC) (1.4), IR Out (MP), RS-232C) (1.4), Lock Down Plate (Except 65"), Lock Down RS-232C) (1.4), IR Out (MP), IR Out	Compatibility (MR18HA), Con RF, WOL, Multi-code IR M) (HDMI-CEC), N embedded vice Only (3.5 mm TRS) Dut, U12) 200 × 200 mm 1 pole (Swivel)
Smart Features Hospitality Features	webOS23 User Interfa Mobile Co Diagnostics I External : Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Month of the Installer Menu, Lock Mode (Limited), FSpeaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), Isemote, Moving Picture Playback (SD/HI Anti-theft System (Kensington LHDMI In x2 (2.0), US HDMI IN x2 (2.	ry Mode, Quick Access, Web Browser, SI AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solution IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imagnistant On, VLAN ID, RIP (Remote Jack P. DyPlus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Exception) B In (2.0), RS-232C In (3.5 mm TRRS), Special DIMI In (2.0), USB In (2.0), Antenna/Cabi Ir-Link CFG (3.5 mm TRS) (b-LAN Service), 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray	DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback (HDMI-CEC) (1.4), IR Out (MP), RS-232C) (1.4), Lock Down Plate (Except 65"), Lock Down	Compatibility (MR18HA), ,, ,on RF, WOL, , Multi-code IR M) (HDMI-CEC), N embedded vice Only (3.5 mm TRS) Dut, 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray
Smart Features Hospitality Features	webOS23 User Interfa Mobile Co Diagnostics External: Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D)	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Nounce of the Installer Menu, Lock Mode (Limited), For Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), Is mote, Moving Picture Playback (SD/HI Anti-theft System (Kensington L HDMI In x2 (2.0), US HDMI IN	ry Mode, Quick Access, Web Browser, SI AP, Wi-Fi, Screen Share (Miracast), Smar AP, Voice Recognition (Standalone/Solution IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Iman Instant On, VLAN ID, RJP (Remote Jack Pa O/Plus HD), Auto Off / Sleep Timer, Ener, Ock, Credenza/Security Aperture (Except B In (2.0), RS-232C In (3.5 mm TRRS), Spo IDMI In (2.0), USB In (2.0), Antenna/Cabl /-Link CFG (3.5 mm TRS) (b-LAN Service) 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm	DP Server Compatibility, Magic Remote of the Share, DIAL, Bluetooth Audio Playback n), IoT, EZ-Manager, USB Cloning, Wake (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) ge), Insert Image, One Channel Map (LCI cack) Compatibility (Teleadapt/Guestlink gy Saving Mode, Motion Eye Care, b-LAI t 65"), Lock Down Plate (Except 65") eaker Out/Line Out (3.5 mm Stereo), Sere In (Dual b-LAN), Optical Digital Audio of LAN (RJ45), Aux LAN (RJ45), MPI Port (F 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.1 x 25.6 x 2.2 in. 1,121 × 651 × 57.1 mm	Compatibility (MR18HA), on RF, WOL, , Multi-code IR W) (HDMI-CEC), N embedded vice Only (3.5 mm TRS) Dut, U12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm
Smart Features Hospitality Features	webOS23 User Interfa Mobile Co Diagnostics I External: Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W × H × D) Dimensions with Stand	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Minstaller Menu, Lock Mode (Limited), Fispeaker Out (R: 1.0 W, L: 1.0 W, 8 Q), Immote, Moving Picture Playback (SD/HI Anti-theft System (Kensington Limited), HDMI In x2 (2.0), US HDMI IN x2 (2.0),	ry Mode, Quick Access, Web Browser, St AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solution IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imanstant On, VLAN ID, RIP (Remote Jack Pa) Op/Plus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Exception of the Communication	DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback (HDMI-CEC) (1.4), IR Out (MP), RS-232C) (1.4), IR Out (MP), IR Out (MP	Compatibility (MR18HA), Con RF, WOL, MULTI-code IR M) (HDMI-CEC), N embedded vice Only (3.5 mm TRS) Out, U12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in.
Smart Features Hospitality Features	webOS23 User Interfa Mobile Co Diagnostics I External: Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Nounce of the Normal States of the Normal State	ry Mode, Quick Access, Web Browser, SI AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solution (PI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imagnstant On, VLAN ID, RJP (Remote Jack Paper) (Plus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Except Bln (2.0), RS-232C In (3.5 mm TRRS), Sprink (2.0), USB In (2.0), Antenna/Cable /-Link CFG (3.5 mm TRS) (b-LAN Service) 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 777 × 303 mm 53.5 × 33.9 × 8.1 in.	DP Server Compatibility, Magic Remote of the Share, DIAL, Bluetooth Audio Playback In), IoT, EZ-Manager, USB Cloning, Wake (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) ge), Insert Image, One Channel Map (LCI ack) Compatibility (Teleadapt/Guestlink gy Saving Mode, Motion Eye Care, b-LAI t 65"), Lock Down Plate (Except 65") eaker Out/Line Out (3.5 mm Stereo), Sere In (Dual b-LAN), Optical Digital Audio O. LAN (RI45), Aux LAN (RI45), MPI Port (RI45), MPI Por	Compatibility (MR18HA), , , , , , , , , , , , , , , , , , ,
Smart Features Hospitality Features Jack Interface	webOS23 User Interfa Mobile Co Diagnostics I External: Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions (W x H x D)	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Nounce of the Installer Menu, Lock Mode (Limited), Foreaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), Is mote, Moving Picture Playback (SD/HI Anti-theft System (Kensington L HDMI In x2 (2.0), US HDMI IN x2	ry Mode, Quick Access, Web Browser, SI AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solution (PI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imagnstant On, VLAN ID, RJP (Remote Jack Pa)/Plus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Except Bln (2.0), RS-232C In (3.5 mm TRRS), Spr. DMI In (2.0), USB In (2.0), Antenna/Cable-Link CFG (3.5 mm TRS) (b-LAN Service), 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 777 × 303 mm 53.5 × 33.9 × 8.1 in. 1,360 × 860 × 207 mm	DP Server Compatibility, Magic Remote of the Share, DIAL, Bluetooth Audio Playback n), IoT, EZ-Manager, USB Cloning, Wake (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) ge), Insert Image, One Channel Map (LCI ack) Compatibility (Teleadapt/Guestlink gy Saving Mode, Motion Eye Care, b-LAI t 65"), Lock Down Plate (Except 65") eaker Out/Line Out (3.5 mm Stereo), Sere In (Dual b-LAN), Optical Digital Audio O. LAN (RJ45), Aux LAN (RJ45), MPI Port (Compatibility (MR18HA), , , , , , , , , , , , , , , , , , ,
Smart Features Hospitality Features Jack Interface	webOS23 User Interfa Mobile Co Diagnostics I External: Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W × H × D) Dimensions with Stand (W × H × D) Shipping Dimensions (W × H × D) Weight without Stand	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Nounce of the Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Nounce of the Innection Overlay (Innection Overlay (Innectio	ry Mode, Quick Access, Web Browser, SI AP, Wi-Fi, Screen Share (Miracast), Smar AP, Vice Recognition (Standalone/Solution (PI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Iman Instant On, VLAN ID, RIP (Remote Jack Pa D/Plus HD), Auto Off / Sleep Timer, Ener, Incock, Credenza/Security Aperture (Except B In (2.0), RS-232C In (3.5 mm TRRS), Spr IDMI In (2.0), USB In (2.0), Antenna/Cabl /-Link CFG (3.5 mm TRS) (b-LAN Service), 300 × 300 mm 1 pole (Swivel) Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 777 × 303 mm 53.5 × 33.9 × 8.1 in. 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg	DP Server Compatibility, Magic Remote of the Share, DIAL, Bluetooth Audio Playback (h), IoT, EZ-Manager, USB Cloning, Wake (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) (ge), Insert Image, One Channel Map (LCI ack) Compatibility (Teleadapt/Guestlink gy Saving Mode, Motion Eye Care, b-LAI t 65"), Lock Down Plate (Except 65") (eaker Out/Line Out (3.5 mm Stereo), Ser e In (Dual b-LAN), Optical Digital Audio (LAN (RJ45), Aux LAN (RJ45), MPI Port (F) (1.4)	Compatibility (MR18HA), , , , , , , , , , , , , , , , , , ,
Smart Features Hospitality Features Jack Interface	webOS23 User Interfa Mobile Co Diagnostics I External : Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand Weight without Stand	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Nounce of the Compatible Of the Compatible Protocol (Nounce of the Compatible Of the Of the Compatible	ry Mode, Quick Access, Web Browser, SI AP, Wi-Fi, Screen Share (Miracast), Smar AP, Vi-Fi, Screen Share (Miracast), Smar AP, Voice Recognition (Standalone/Solution (IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imagnstant On, VLAN ID, RIP (Remote Jack P. Dyllus HD), Auto Off / Sleep Timer, Enerpock, Credenza/Security Aperture (Exception of the Communication of the Communicatio	DP Server Compatibility, Magic Remote of the Share, DIAL, Bluetooth Audio Playback (h), IoT, EZ-Manager, USB Cloning, Wake (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) (ge), Insert Image, One Channel Map (LCI ack) Compatibility (Teleadapt/Guestlink gy Saving Mode, Motion Eye Care, b-LAR (55"), Lock Down Plate (Except 65") eaker Out/Line Out (3.5 mm Stereo), Ser e In (Dual b-LAN), Optical Digital Audio (1.4N (RJ45), Aux LAN (RJ45), MPI Port (F. 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 44.1 × 25.6 × 2.2 in. 1,121 × 651 × 57.1 mm 44.1 × 28.1 × 11.9 in. 1,121 × 713 × 303 mm 51.9 × 31.9 × 7.4 in. 1,317 × 310 × 188 mm 26.7 lbs. / 12.1 kg 33.7 lbs. / 15.3 kg	Compatibility (MR18HA), ,, on RF, WOL, , Multi-code IR M) (HDMI-CEC), N embedded vice Only (3.5 mm TRS) Dut, B12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg
Smart Features Hospitality Features Jack Interface	webOS23 User Interfa Mobile Co Diagnostics: External: Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight	ce, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), Soft. Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Month of the Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Month of the Innection Overlay (Hond), Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), Is emote, Moving Picture Playback (SD/HI Anti-theft System (Kensington L HDMI In x2 (2.0), US	ry Mode, Quick Access, Web Browser, SI AP, Wi-Fi, Screen Share (Miracast), Smar AP, Vi-Fi, Screen Share (Miracast), Smar AP, Voice Recognition (Standalone/Solution (PI), RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imagnstant On, VLAN ID, RIP (Remote Jack P. DyPlus HD), Auto Off / Sleep Timer, Enerpock, Credenza/Security Aperture (Exception (Excep	DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) (1.4), IR Out (1.5), IR Out (1.4), IR Out (1.5), IR Out (1.4), IR Out (1.5), IR Out (1.4), IR Out	Compatibility (MR18HA), Con RF, WOL, Multi-code IR M) (HDMI-CEC), Vice Only (3.5 mm TRS) Dut, B12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg
Smart Features Hospitality Features Jack Interface	webOS23 User Interfa Mobile Co Diagnostics of the Color	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Month of the Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Month of the Innection Overlay (Image), Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), It emote, Moving Picture Playback (SD/HI Anti-theft System (Kensington L HDMI In x2 (2.0), US HDMI IN x2 (2.0), U	ry Mode, Quick Access, Web Browser, SI AP, Wi-Fi, Screen Share (Miracast), Smar AP, Vi-Fi, Screen Share (Miracast), Smar AP, Voice Recognition (Standalone/Solution (PI), RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imanstant On, VLAN ID, RIP (Remote Jack P. DyPlus HD), Auto Off / Sleep Timer, Enerpock, Credenza/Security Aperture (Exception (Except	DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) ge), Insert Image, One Channel Map (LCI ack) Compatibility (Teleadapt/Guestlink gy Saving Mode, Motion Eye Care, b-LAR (55"), Lock Down Plate (Except 65") eaker Out/Line Out (3.5 mm Stereo), Ser In (1.4), Optical Digital Audio (1.4), LAN (RJ45), Aux LAN (RJ45), MPI Port (RJ45), Aux LAN (RJ45), MPI Port (RJ45), MPI Port (RJ45), Aux LAN (RJ45), MPI Port (RJ45), MPI	Compatibility (MR18HA), Compatibility (MR18HA), Con RF, WOL, Multi-code IR M) (HDMI-CEC), N embedded Vice Only (3.5 mm TRS) Dut, U12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 x 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg 12.8 / 12.8 / 12.8 / 19.9 m
Smart Features Hospitality Features Jack Interface	webOS23 User Interfa Mobile Co Diagnostics i External: Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W × H × D) Dimensions with Stand (W × H × D) Shipping Dimensions (W × H × D) Weight without Stand Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B)	ce, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), Soft. Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Month of the Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Month of the Innection Overlay, HDMI Innection Overlay, Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), It works (Moving Picture Playback (SD/HI Anti-theft System (Kensington L HDMI Innection Innect	ry Mode, Quick Access, Web Browser, St AP, Wi-Fi, Screen Share (Miracast), Smar Voice Recognition (Standalone/Solution (PI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imagnstant On, VLAN ID, RIP (Remote Jack P. DyPlus HD), Auto Off / Sleep Timer, Enerpock, Credenza/Security Aperture (Exception (2.0), RS-232C In (3.5 mm TRRS), Spidion (2.0), RS-232C In (3.5 mm TRRS), Spidion (2.0), RS-232C In (3.5 mm TRRS), Spidion (2.0), SS-232C In (3.5 mm TRRS), Spidion (2.0), Antenna/Cabil (4.1), Final (2.0), Antenna (2.0), SS-232C In (3.5 mm TRRS), Spidion (3.5 mm	DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) (1.4), IR O	Compatibility (MR18HA), Con RF, WOL, Multi-code IR M) (HDMI-CEC), N embedded vice Only (3.5 mm TRS) Dut, U12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg 12.8 / 12.8 / 12.8 / 19.9 m 6.9 / 6.9 / 6.9 / 6.9 / 18.4 mm
Smart Features Hospitality Features Jack Interface	webOS23 User Interfa Mobile Co Diagnostics I External: Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B) Power Supply (Voltage, Hz)	ce, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), Soft. Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Month of the Innection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Month of the Innection Overlay, HDMI Innection In	ry Mode, Quick Access, Web Browser, St AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solution IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imanstant On, VLAN ID, RIP (Remote Jack Pa) (Plus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Exception of Standard Pa) (Plus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Exception of Standard Pa) (Plus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Exception of Standard Pa) (Plus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Exception of Standard Pa) (Plus HD), Auto Off / Sleep Timer, Energo (Exception of Standard Pa) (Plus HD) (DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) (1.4), IR O	Compatibility (MR18HA), Con RF, WOL, Multi-code IR M) (HDMI-CEC), N embedded vice Only (3.5 mm TRS) Out, U12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 623 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg 12.8 / 12.8 / 19.9 m 6.9 / 6.9 / 6.9 / 18.4 mm 100-240 Vac, 50/60 Hz
Smart Features Hospitality Features Jack Interface	webOS23 User Interfa Mobile Co Diagnostics I External: Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Weight without Stand Weight without Stand Weight with Stand Shipping Dimensions (M x H x D) Weight without Stand Weight with Other Stand Weight With Stand Shipping Weight On Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B) Power Supply (Voltage, Hz) Power Consumption (Typ. / Max.)	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Number of the Compatible Protocol (Number	ry Mode, Quick Access, Web Browser, St AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solution IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imanstant On, VLAN ID, RIP (Remote Jack Pa) (Plus HD), Auto Off / Sleep Timer, Enerpock, Credenza/Security Aperture (Exception of the Control of the Contro	DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) (1.4), In Compatibility (Teleadapt/Guestlink (1.4), Saw (1.4), MPI Port (RS-200 × 200 mm	Compatibility (MR18HA), Con RF, WOL, MI) (HDMI-CEC), N embedded vice Only (3.5 mm TRS) Dut, Dut, D12 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 663 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg 12.8 / 12.8 / 12.9 yn 6.9 / 6.9 / 6.9 / 18.4 mm 100-240 Vac, 50/60 Hz 82 W / 119 W
Smart Features Hospitality Features Jack Interface	webOS23 User Interfa Mobile Co Diagnostics I External: Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Weight without Stand Shipping Weight On Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B) Power Consumption (Typ. / Max.) Standby Power Consumption	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Number of the Compatible Protocol (Number	ry Mode, Quick Access, Web Browser, St AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solution IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imanstant On, VLAN ID, RIP (Remote Jack Pa) Op/Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Exception of the Common	DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) (1.4), Insert Image, One Channel Map (LCI ack) Compatibility (Teleadapt/Guestlink (1.4), Saw (1.4), Insert Image, One Channel Map (LCI ack) (1.4), Insert Image, One Channel Map (LCI ack) (1.4), Insert Image, D-LAN (RJ45), MPI Port (RS-10), Insert Image, D-LAN (RJ45), Insert Image, D-LAN (RJ4	Compatibility (MR18HA), Con RF, WOL, Multi-code IR M) (HDMI-CEC), N embedded vice Only (3.5 mm TRS) Dut, U12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 663 × 303 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg 12.8 / 12.8 / 12.8 / 19.9 n 6.9 / 6.9 / 6.9 / 6.9 / 18.4 mn 100-240 Vac, 50/60 Hz 82 W / 119 W Under 0.5 W
Smart Features Hospitality Features Jack Interface	webOS23 User Interfa Mobile Co Diagnostics I External: Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Weight without Stand Weight without Stand Weight without Stand Weight without Stand Shipping Dimensions (W x H x D) Weight without Stand Weight with On Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B) Power Supply (Voltage, Hz) Power Consumption (Typ. / Max.) Standby Power Consumption Warranty	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Nunch and Speaker Out (R: 1.0 W, L: 1.0 W, 8 O), Ismote, Moving Picture Playback (SD/H) Anti-theft System (Kensington L HDMI In x2 (2.0), US HDMI In x2 (2.0), US Dark Charcoal Gray 57.2 x 33 x 2.3 in. 1,454 x 838 x 57.7 mm 57.2 x 35.8 x 13.4 in. 1,454 x 909 x 340 mm 63 x 38.2 x 9 in. 1,600 x 970 x 228 mm 47.4 lbs. / 21.5 kg 50.5 lbs. / 22.9 kg 63.7 lbs. / 28.9 kg 12.8 / 12.8 / 12.8 / 12.8 / 12.8 / 19.9 mm 6.8 / 6.8 / 6.8 / 6.8 / 18.4 mm 100-240 Vac, 50/60 Hz 144 W / 180 W Under 0.5 W 2 Year Limited	y Mode, Quick Access, Web Browser, St AP, Wi-Fi, Screen Share (Miracast), Smar Voice Recognition (Standalone/Solution (PI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imagistant On, VLAN ID, RIP (Remote Jack Pa) (Splesh Pimer, Enerock, Credenza/Security Aperture (Exception of the Communication of	DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) ge), Insert Image, One Channel Map (LCI ack) Compatibility (Teleadapt/Guestlink ys Saving Mode, Motion Eye Care, b-LAN (ES"), Lock Down Plate (Except 65") Beaker Out/Line Out (3.5 mm Stereo), Server (1.5), Lock Down Plate (Except 65") Beaker Out/Line Out (3.5 mm Stereo), Server (1.5), Aux LAN (RI45), MPI Port (RI45), Aux LAN (RI45), MPI Port (RI45), Aux LAN (RI45), MPI Port (RI45), MPI Port (RI45), Aux LAN (RI45), MPI Port	Compatibility (MR18HA), Con RF, WOL, Multi-code IR M) (HDMI-CEC), N embedded vice Only (3.5 mm TRS) Out, U12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 1,075 × 660 × 203 mm 42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg 12.8 / 12.8 / 12.9 p m 6.9 / 6.9 / 6.9 / 18.4 mm 100-240 Vac, 50/60 Hz 82 W / 119 W Under 0.5 W 2 Year Limited
Smart Features Hospitality Features Jack Interface	webOS23 User Interfa Mobile Co Diagnostics I External: Mobile Re Set Side Set Rear VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Weight without Stand Shipping Weight On Bezel Width (L/R/U/B) Off Bezel Width (L/R/U/B) Power Consumption (Typ. / Max.) Standby Power Consumption	ce, Smart Home (Launcher Bar), Galles SW Clock (World Clock / Alarm), Soft. nnection Overlay, HDMI-ARC (HDMI 2) (IP Remote), SI Compatible Protocol (Number of the Compatible Protocol (Number	ry Mode, Quick Access, Web Browser, St AP, Wi-Fi, Screen Share (Miracast), Smar , Voice Recognition (Standalone/Solution IPI, RS-232C), HTNG-CEC (1.4), Simplink Port Block, Welcome Screen (Splash Imanstant On, VLAN ID, RIP (Remote Jack Pa) Op/Plus HD), Auto Off / Sleep Timer, Energick, Credenza/Security Aperture (Exception of the Common	DP Server Compatibility, Magic Remote of t Share, DIAL, Bluetooth Audio Playback (HDMI-CEC) (1.4), IR Out (MPI, RS-232C) (1.4), Insert Image, One Channel Map (LCI ack) Compatibility (Teleadapt/Guestlink (1.4), Saw (1.4), Insert Image, One Channel Map (LCI ack) (1.4), Insert Image, One Channel Map (LCI ack) (1.4), Insert Image, D-LAN (RJ45), MPI Port (RS-10), Insert Image, D-LAN (RJ45), Insert Image, D-LAN (RJ4	Compatibility (MR18HA), Con RF, WOL, Multi-code IR M) (HDMI-CEC), N embedded vice Only (3.5 mm TRS) Dut, U12) 200 × 200 mm 1 pole (Swivel) Dark Charcoal Gray 38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm 38.1 × 24.5 × 11.9 in. 967 × 662 × 303 mm 19.4 lbs. / 8.8 kg 26.5 lbs. / 12.0 kg 34.0 lbs. / 15.4 kg 12.8 / 12.8 / 12.9 / 19.9 r 6.9 / 6.9 / 6.9 / 6.9 / 18.4 mr 100-240 Vac, 50/60 Hz 82 W / 119 W Under 0.5 W

^{*} Specifications are subject to change without notice. Please make sure to check the product manual for details about product usage.



