LED panel 30 × 120 cm, 36 W, neutral white

LED-Panel 30 × 120 cm, 36 W, neutralweiß · DEMO-ELE-3006

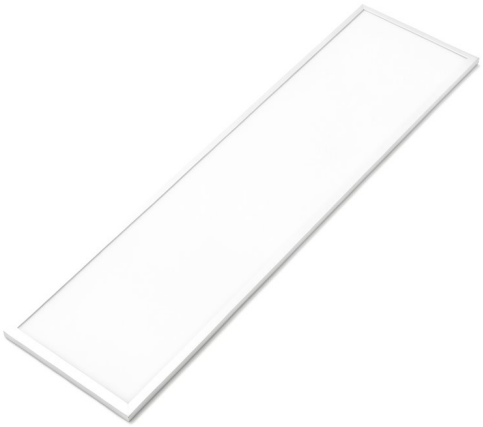

Rated voltage	230 V
Ingress protection (IP)	IP20
Power	36 W
Luminous flux	3,600 lm
Colour temperature (CCT)	4,000 K
Weight	2.9 kg
Protection class	Protection class II
Luminous efficacy (lm/W)	100
Colour rendering index (Ra)	80
Lifetime (hours)	50,000

Narrow LED ceiling panel with 4000 K, for offices and corridors in suspended ceilings.

Schmales LED-Deckenpanel mit 4000 K, für Büros und Gänge in abgehängten Decken.

Product data sheet from the revenexx sample data. The product, the maker and every value on this sheet are invented for demonstration; this is not a real product and not a declaration of conformity.