

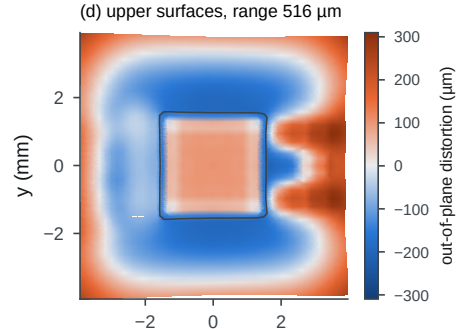
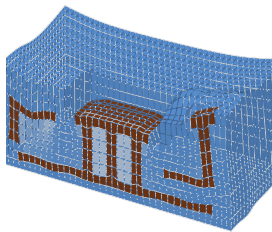


(a) baseline: part sectioned at  $y = 0$  (mean copper density 0.959)

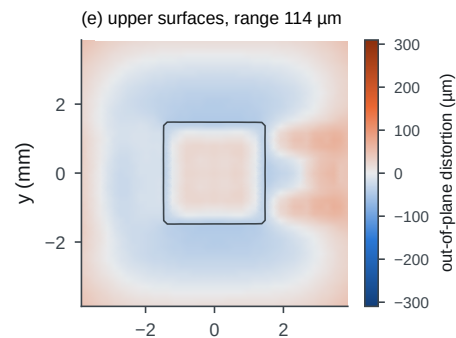

(b) nominal optimum: part sectioned at  $y = 0$  (mean copper density 0.929)

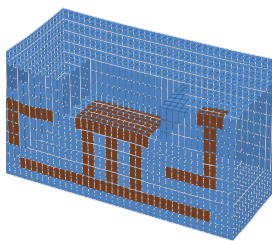

(c) robust design: part sectioned at  $y = 0$  (mean copper density 0.927)

