



glass-ceramic package
10 × 10 × 2.5 mm, open die cavity




copper: die pad and thermal vias, meshed ground, solenoid, shielded stripline, bond pad

fine Cu, IBM-type programme

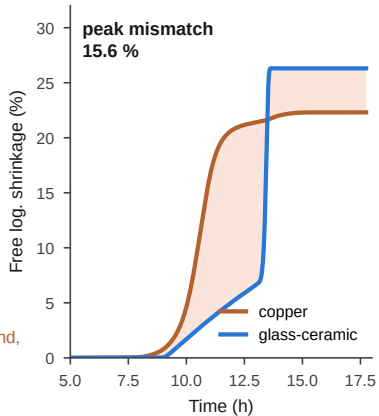

char-timed release (fragile)

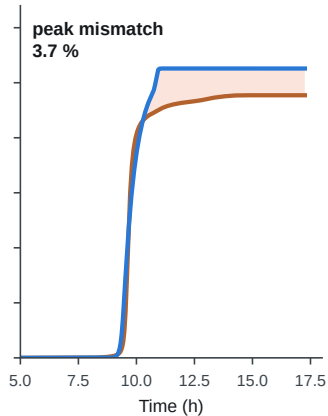

robust paste and programme

