





(a) baseline: sectioned part

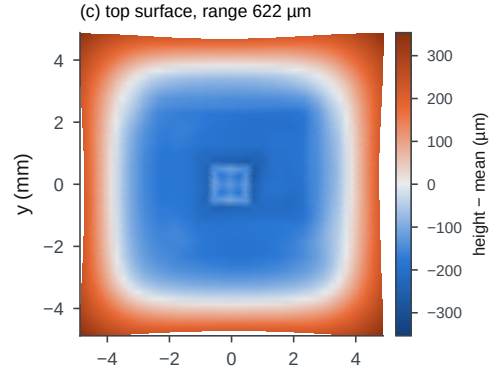



(b) copper, mean $\rho = 0.960$




(d) nominal optimum: sectioned part



(e) copper, mean $\rho = 0.929$

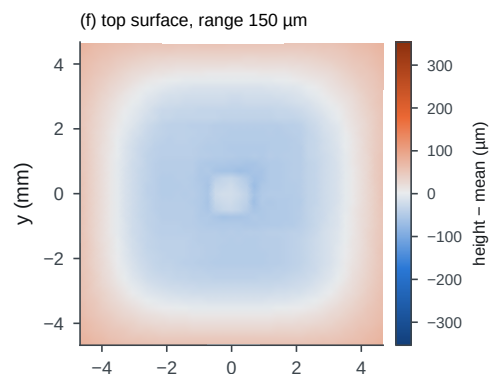

(g) robust design: sectioned part



(h) copper, mean $\rho = 0.928$

