




## BNC M RA CRIMP FOR LMR 400

**Part no. ST02BNCMR4001X03**

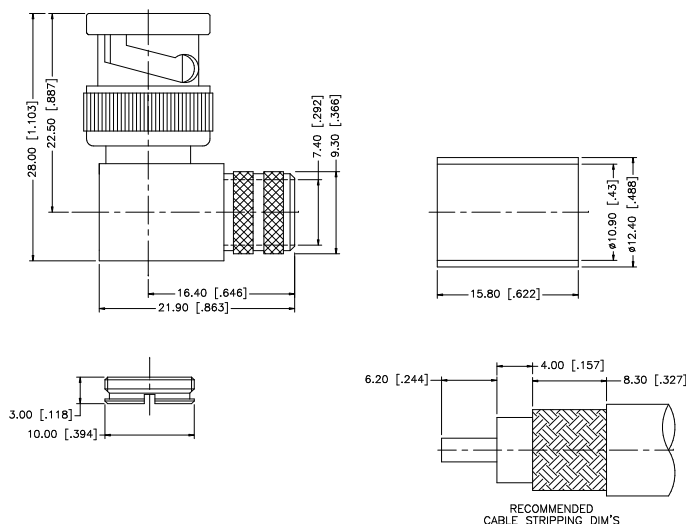

### **Electrical:**

Characteristic Impedance	50 ohm
Frequency Range	DC-3Ghz
VSWR	$\leq 1.15 @ DC-3GHz$
Dielectric Withstanding Voltage	$\geq 1000V$ RMS, 50Hz, at sea level
Dielectric Resistance	$\geq 2500V$ RMS
Contact Resistance	Center Contact $\leq 1$ m $\Omega$ Outer Contact $\leq 0.25m\Omega$

### **Mechanical:**

Durability	Mating Cycles $\geq 500$
------------	--------------------------

### **Material and Plating:**

	Material	Plating
Body	Brass	CuSnZn
Insulator	PTFE(Teflon)	-
Center conductor	Phosphor Copper	gold

### **Environmental:**

Operating Temperature Range	-10°C ~ +50°C
RoHs	Compliant