



STK SERIES CONNECTOR



Page No.


1 of 1

Nomenclature:CONN RF50 TNC (M) ST PL FOR LMR 240 CA

STK-571126931982

CONN RF50 TNC (M) ST PL FOR LMR 240 CA

OUTLINE DRAWING

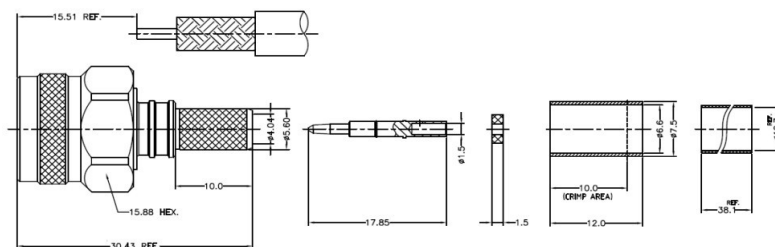

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range	0-6 GHz
VSWR	1.3 Max 0-6 Ghz
DielectricWithstandingVoltage	1000v
Contact resistance	$\leq 2.0 \text{ M}\Omega$
Insulation Resistance	$\geq 5000 \text{ M}\Omega$
Voltage rating	500v (rms)

ENVIRONMENTAL INFORMATION

Operation temperature	-65 °C to +165 °C
-----------------------	-------------------

MECHANICAL INFORMATION

Durability	500 Cycles
Center contact	6lbs
Torque	4-6 in-lbs
Nut retention	60 lbs

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING				 Synergy Telecom Pvt Ltd Defence & Aerospace Division
BODY		BRASS		ALBALOY COPPER				
CONTACT PIN		BRASS		GOLD				
INSULATOR		TEFLON		-				
FERRULE		BRASS		ALBALOY COPPER				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
								Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in