



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Page No.


1 of 1

Nomenclature:CONNECTOR RF 50 N ST MALE CRIMP LMR 300

STK-571126932079

CONNECTOR RF 50 N ST MALE CRIMP LMR 300

OUTLINE DRAWING

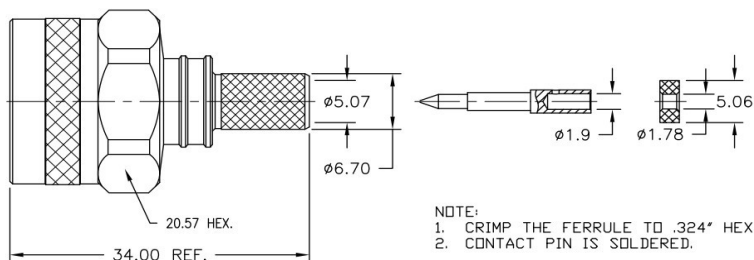

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range	0-6 GHz
VSWR	≤ 1.35
DielectricWithstandingVoltage	1000v
Contact resistance	$\leq 0.2 \text{ M}\Omega$
Insulation Resistance	$\geq 5000 \text{ M}\Omega$
Voltage rating	500v (rms)

ENVIRONMENTAL INFORMATION

Operation temperature	-65 °C to +165 °C
-----------------------	-------------------

MECHANICAL INFORMATION

Durability	500 Cycles
Coupling nut retention	100 lbs
Torque	6-10 in-lbs

MATERIAL INFORMATION

COMPONENTS	MATERIAL	PLATING
BODY	BRASS	ALBALOY COPPER
CONTACT PIN	BRASS	GOLD
INSULATOR	TEFLON	-
SHrink tube	PO	BLACK
FERRULE	BRASS	ALBALOY COPPER

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in