



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Page No.


1 of 1

Nomenclature: CONNECTOR RF 50 N ST MALE CRIMP LMR 400

STK-571126932176

CONNECTOR RF 50 N ST MALE CRIMP LMR 400

OUTLINE DRAWING

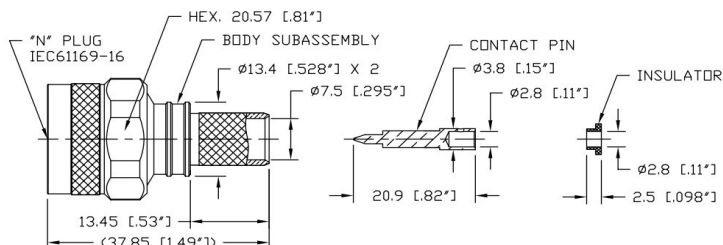

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency Range	0-6 GHz
VSWR	< 1.30.1 upto 6Ghz
Insertion Loss	0.05x $\sqrt{f}$ (6Ghz)
DielectricWithstandingVoltage	1500 v
Outer Conductor	<0.4
Inner Conductor	<0.8
Insulation Resistance	≥ 5000 M Ω

ENVIRONMENTAL INFORMATION

Operation temperature	-55 °C to +125 °C
-----------------------	-------------------

MECHANICAL INFORMATION

Torque	1.7
Nut retention	500
Durability	≥ 500 cycles

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING			
BODY		BRASS		ALBALOY COPPER			
CONTACT PIN		BRASS		GOLD			
INSULATOR		PTFE		-			
SHRINK TUBE		Adhesive line Polyolefin					
FERRULE		COPPER		ALBALOY COPPER			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.
www.rfconnector.in