



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CONN COAXIAL N FEMALE FLANGE MOU


Page No.

1 of 1

STK-571154621214

CONN COAXIAL N FEMALE FLANGE MOU

OUTLINE DRAWING

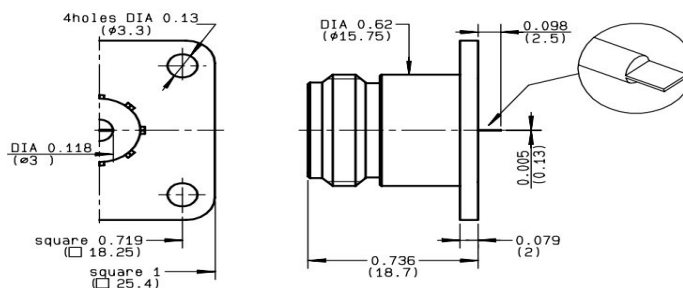

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-11 Ghz
V.S.W.R	1.04+ .004 xF(Ghz) Maxi
Inserting Loss	0.015 F (Ghz) db Maxi
Dielectric	2500 Veff Mini
Insulation	5000 M Ω Mini
Voltage Rating	1400 Veff Maxi

ENVIRONMENTAL INFORMATION

Operation temperature	-55°C ~ 155°C
-----------------------	---------------

MECHANICAL INFORMATION

Durability	500 Cycles
Mating End	27 N Mini
Opposite end	27 N Mini
Torque	2.8 cm.N Mini
Weight	26.7 grm

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING			
Housing		Brass		Gold			
Contact Pin		Ber. Copper		Gold			
Cover		Brass		Gold			
Insulator		TEFLON		-			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-



Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in