



www.rfconnector.in




Page No.

1 of 1

STK-571156251299

OUTLINE DRAWING

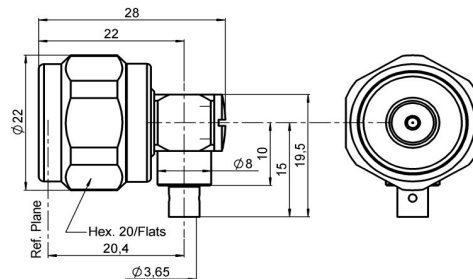

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-11 Ghz
V.S.W.R	1.10*+ 0.0000 xF(Ghz) Maxi
Inserting Loss	0.07 F (Ghz) db Maxi
RF leakage	-(101 -F(GHz) db Maxi
Dielectric	1000 Veff Mini
Insulation	5000 M Ω Mini
Voltage Rating	335 Veff Maxi

ENVIRONMENTAL INFORMATION

Operation temperature	-55°C ~ 105°C
-----------------------	---------------

MECHANICAL INFORMATION

Mating	170 N.cm
Mating Life	500 Cycles Mini
Weight	30,7680 grm

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING				
BODY		BRASS		BBR 2				
CENTER CONTACT		BRASS		GOLD 1.3 OVER NICKEL 2				
OUTER CONTACT		BRASS		BBR 2				
INSULATOR		PTFE		-				
GASKET		SILICON RUBBER		-				
OTHER PARTS		BRASS		BBR 2				
Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	01.12.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	
								Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.