




BNC Female Bulkhead Crimp Connector For RG179 Cable

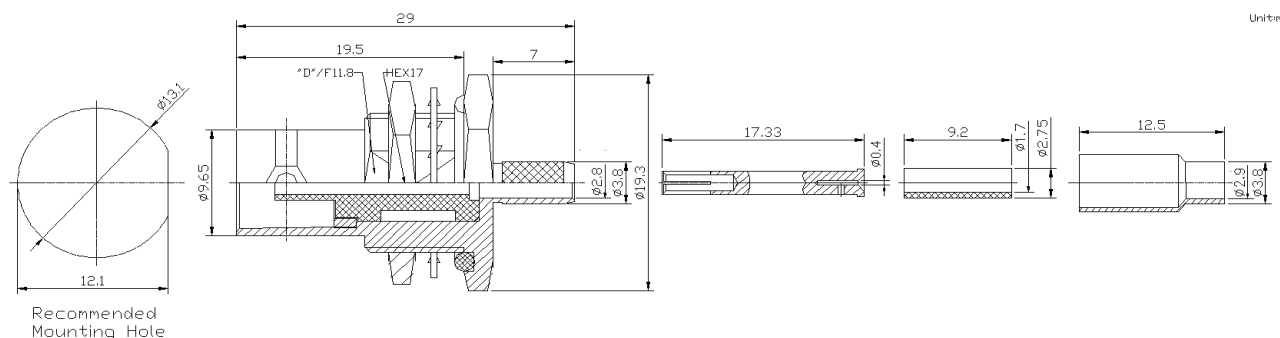

Unit:mm

Interface

According to

IEC 61169-8

Electrical

Characteristic Impedance

75 Ω

Frequency Range

DC-4GHz

VSWR

 ≤ 1.25 @DC-2000MHz

Dielectric Withstanding Voltage

1500V RMS,50Hz,at sea level

Working Voltage

500V RMS,50Hz,at sea level

Dielectric Resistance

 $\geq 5000M\Omega$

Contact Resistance

Center Contact $\leq 1.5m\Omega$

Outer Contact $\leq 1.0m\Omega$

Mechanical

Durability

Mating cycles ≥ 500

Material and plating

Component	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Center conductor	Phosphor bronze	Au
Sleeve	PTFE	-
Fastening nut	Brass	Ni
Ferrule	Annealed copper	Ni
Washer	Annealed copper	Ni
Gasket	Silicone rubber	-

Environmental

Temperature Range

-40°C ~ +85°C

RoHS

Compliant

Recommended stripped cable dimension:
