


BNC Male Crimp Connector For RG179 Cable

(Contact attachment: Inner: solder; Outer: crimp)

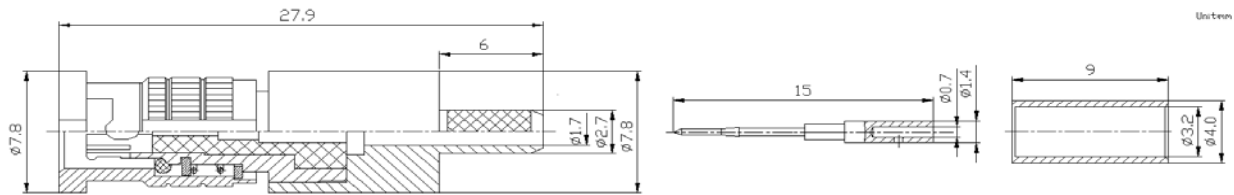

Interface

According to

SEIRES:HD-BNC

Electrical

Characteristic Impedance

75 Ω

Frequency Range

DC-3GHz

VSWR

≤ 1.15 @DC-3GHz

Dielectric Withstanding Voltage

≥ 1000 V RMS,50Hz,at sea level

Voltage Rating

≤ 500 V RMS,50Hz,at sea level

Dielectric Resistance

≥ 10000 M Ω

Contact Resistance

Center Contact ≤ 5 m Ω

Outer Contact ≤ 2.5 m Ω

Mechanical

Durability

Mating cycles ≥ 500

Material and plating

Component	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Center conductor	Phosphor bronze	Au
Outer contact	Beryllium bronze	Ni
Washer	Brass	Ni
Coupling nut	Brass	Ni
Lock washer	Stainless steel (SS303)	Passivation
Ferrule	Annealed copper	Ni
Gasket	Silicone rubber	-

Environmental

Temperature Range

-65 ~ +165 $^{\circ}$ C

Corrosion (Salt Spray)

MIL-STD-202, Method 101, Cond. B

Mechanical Shock

MIL-STD-202, Method 213, Cond. B

Vibration

MIL-STD-202, Method 204, Cond. B

Thermal Shock

MIL-STD-202, Method 107, Cond. B

RoHS

Compliant

B

Recommended stripped cable dimension

Crimp size :.128" HEX for ferrule

