


BNC Male Crimp Connector For RG179 Cable

(Contact attachment: Inner: solder; Outer: crimp)

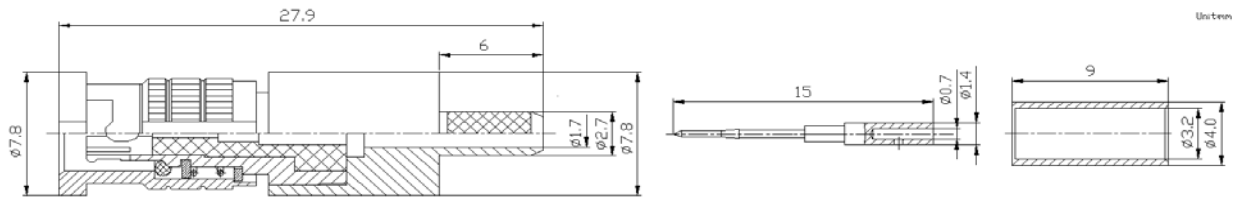

Interface According to		SEIRES:HD-BNC	
Electrical Characteristic Impedance Frequency Range VSWR Dielectric Withstanding Voltage Voltage Rating Dielectric Resistance Contact Resistance		75 Ω DC-3GHz $\leq 1.15@DC-3GHz$ $\geq 1000V$ RMS,50Hz,at sea level $\leq 500V$ RMS,50Hz,at sea level $\geq 10000M\Omega$ Center Contact $\leq 5m\Omega$ Outer Contact $\leq 2.5m\Omega$	
Mechanical Durability		Mating cycles ≥ 500	
Material and plating Component Body Insulator Center conductor Outer contact Washer Coupling nut Lock washer Ferrule Gasket	Material Brass PTFE Phosphor bronze Beryllium bronze Brass Brass Stainless steel (SS303) Annealed copper Silicone rubber	Plating Ni — Au Ni Ni Ni Passivation Ni —	
Environmental Temperature Range Corrosion (Salt Spray) Mechanical Shock Vibration Thermal Shock RoHS		-65 ~ +165°C STD-202, Method 101, Cond.B STD-202, Method 213, Cond. B STD-202, Method 204, Cond. B STD-202, Method 107, Cond. B Compliant	
Recommended stripped cable dimension Crimp size :.128"HEX for ferrule			