


COAXIAL CABLE

PRODUCT DESCRIPTION

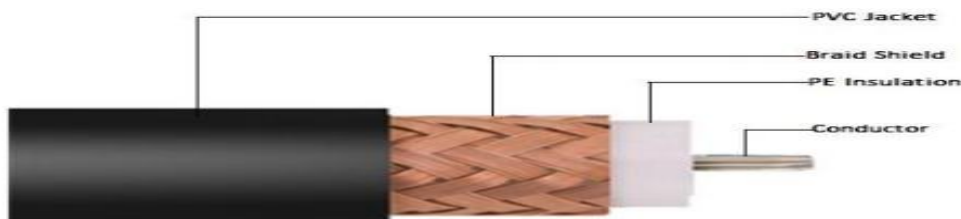

- ST-5D2V Coaxial Cable
- Solid bare Copper(single Strand) Conductor
- Solid polyethelene Dielectric
- Bare Copper braided shield
- Braid Coverage 95%
- Grey High-grade PVC Jacket
- Surface Printing: 5D2V, 50 Ohm manufacturer name ,Approval

Structural parameters Information

Material	Detail	Size mm	Color
Inner Conductor	Solid bare Copper(single Strand)	1/1.4±0.01	Yellow
Dielectric	Solid polyethelene	4.8±0.05	White
Outer Shield	Bare Copper braided shield	168(7*24)*0.14	Yellow
Jacket	PVC	7.3±0.15	Grey

Physical Mechanical Specifications

Item	Unit	Date
Temperature Rating,	°C	-25~+85

Electrical Specifications

Item	Unit	Date
Impedance	Ω	50±2
Capacitance	pF/m	80±2
Propagation Velocity	%	82
Resistance	Ω /km	
Inner Conductor		1.74
Outer Conductor		3.94
Insulation Resistance	M ohm	>10000
Compatible connector		BNC
Signal delay	ns/m	5.0
Test Voltage	KV rms	4.0