




3.5m vehicle-mounted lifting lighting lamp (354200LED)

1.Scope of Application:

This product is widely used in various night operations such as engineering emergency repair, disaster rescue, fire lighting, communication command, police scene, on-site accident handling and other vehicle or mobile emergency lighting equipment.

2.Performance Description:

- ◆ The lamp head is composed of four LED lights, which have the characteristics of high light efficiency, long life, low power consumption and shockproof.
- ◆ The mobile lighting equipment uses an automatic telescopic cylinder for lifting and adjustment, featuring functions of raising, lowering, ascending, and descending. The device starts from its initial horizontal position and rises to 90°, then the pneumatic pump raises the mast to a height of 3.5m, expanding the illumination range. It completes search and positioning lighting through a full rotation of 330° vertically and 380° horizontally via a rotating gimbal.
- ◆ Overall made of a variety of high quality materials, compact structure, stable performance, to ensure normal operation in a variety of harsh environment and climate conditions.
- ◆ The rotating platform adopts a large modulus worm gear transmission mechanism, which can effectively resist shock and impact without displacement and increase the transmission structure gap.
- ◆ The vehicle-mounted over-tilt installation structure can be firmly fixed on the roof for a long time. It is suitable for cars, pickup trucks, jeeps and other large, medium and small vehicle equipment.
- ◆ According to the needs of users, a camera mounting frame can be installed above the rotating cloud platform and in the middle of both ends of the lamp head, and the video line and control line of the camera are reserved to meet the camera function. Or the antenna, radar, communication equipment and meteorological instruments can be installed on the lifting rod to improve the expansibility of the equipment.
- ◆ The mobile vehicle lighting equipment has a wind resistance of 50Km/h.

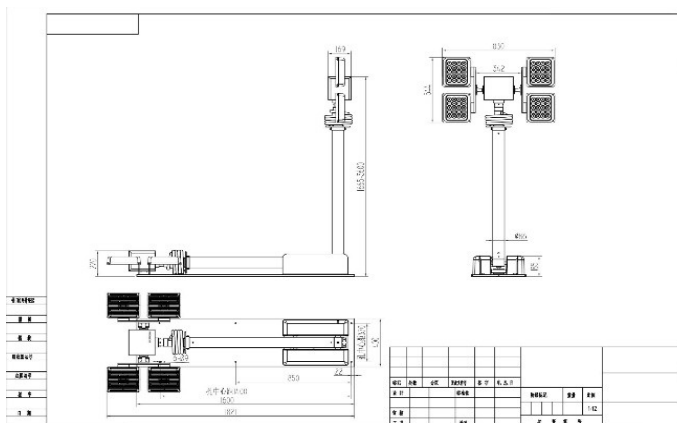



3.technical parameter

pictures

Working voltage: DC12V or DC24V or AC220V (optional)

Light source type: LED

Lighting form of the lamp: floodlight

Color temperature: 6000K

Light flux: 88000lm

Rotation speed: 4 r/min

Lighting power: 4*200W

Working power of straightener: $\leq 120W$ (max)

Rotating working power: $\leq 24W$ (max)

Lighting control mode: four lamps are controlled in two groups

Control mode: RS485 wired control and 433 wireless control

Remote control distance: more than 50 meters, powered by three seven dry batteries

Protocol address: 01

Bit rate: 2400

Rotation Angle: 380° horizontal rotation, 330° vertical rotation

Lift height: 3.5 meters

Lifting mode: pneumatic lifting

Number of mast sections: 4

Spring line: external

Automatic limit protection device: protect the opening of 0.35Mpa, and restore the operation of the air pump at 0.2Mpa

Equipment working environment temperature: -30°~55



4.Product