



Technical Data

STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature:CONN CONN RF 50 CO-AX N-TYPE 11 GHZ ST


Page No.

1 of 1

STK-571126791235

CONN CONN RF 50 CO-AX N-TYPE 11 GHZ ST

OUTLINE DRAWING

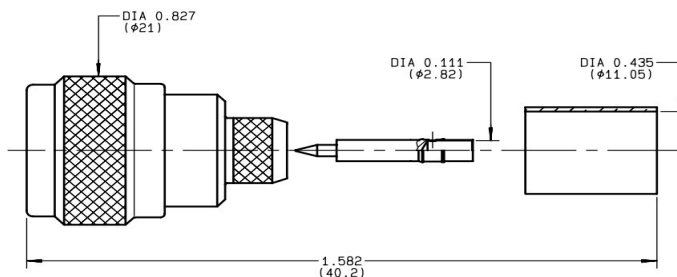

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency	0-11 GHz
VSWR	1.30 + 0.000 x F(GHz) Maxi
Insertion loss	1.048* √F(GHz) dB Maxi
Voltage rating	1400 Veff Maxi
Dielectric withstanding voltage	2500 Veff mini
Insulation resistance	5000 MΩ mini

ENVIRONMENTAL INFORMATION

Operation temperature	-55/+155 ° C
Durability	500 Cycles
Weight	35.9 gr

MECHANICAL INFORMATION

Mating end	68 N mini
Opposite end	68 N mini
Mating	130 N.cm

MATERIAL INFORMATION

COMPONENTS		MATERIAL		PLATING			
BODY		BRASS		BBR 2			
OUTER CONTACT		BRASS		BBR 2			
CENTER CONTACT		BERYLLIUM COPPER		GOLD 0.5 OVER NICKEL 2			
INSULATOR		PTFE		-			
GASKET		SILICON		-			
OTHERS PARTS		BRASS		BBR 2			
Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	01.12.25	Krishnamurthy	-	0	-	-	-
Synergy Telecom P Ltd,				-	-	-	-
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and all its copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in